

## Product Discontinuation Notices

Common Accessories

Issue Date  
March 22, 2021

No. TKX-INDRY-200001-2

### Discontinuation Notice of Square sockets of Model PTF□□A-E series.

#### Product Discontinuation

Square sockets



**Model PTF08A-E**  
**Model PTF14A-E**

#### Recommended Replacement

Square sockets



**Model PTFZ-08-E**  
**Model PTFZ-14-E**  
(Release date: April, 2021)

#### [ Final order entry date ]

The end of March, 2022

#### [ Date of The Last Shipping ]

The end of June, 2022

#### [ Difference from discontinued product ]

Recommended replacement Model	Body Color	Dimensions	Wire connection	Mounting Dimensions	Characteristics	Operation ratings	Operation methods
PTFZ-08-E	**	**	**	**	**	-	-
PTFZ-14-E	**	**	**	**	**	-	-

\*\* : Compatible

\* : The change is a little/Almost compatible





-- : Not compatible

- : No corresponding specification





#### [ Product Discontinuation and recommended replacement ]

Product discontinuation	Recommended replacement
PTF08A-E	PTFZ-08-E
PTF14A-E	PTFZ-14-E

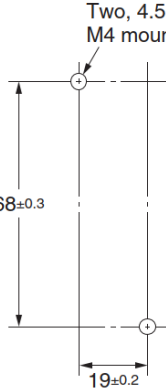
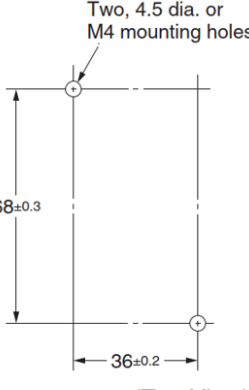
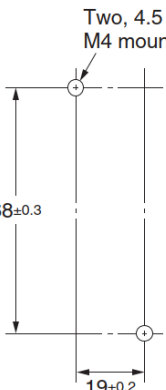
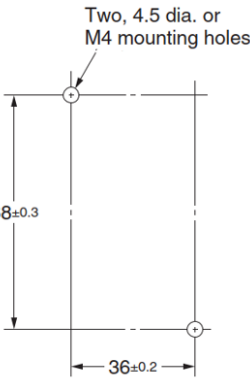
[ Body color ]

Product discontinuation Model PTF08/14A-E	Recommendable replacement Model PTFZ-08/14-E
<p>Body color : Black</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>PTF08A-E</p>  </div> <div style="text-align: center;"> <p>PTF14A-E</p>  </div> </div>	<p>Body color : Black</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>PTFZ-08-E</p>  </div> <div style="text-align: center;"> <p>PTFZ-14-E</p>  </div> </div> <div style="text-align: right; border: 1px solid black; padding: 2px; width: fit-content; margin-top: 10px;">Compatible</div>

[ Wire connection ]

Product discontinuation Model PTF08/14A-E	Recommendable replacement Model PTFZ-08/14-E
<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>PTF08A-E</p>  <p>(TOP VIEW)</p> </div> <div style="text-align: center;"> <p>PTF14A-E</p>  <p>(TOP VIEW)</p> </div> </div>	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>PTFZ-08-E</p>  <p>(TOP VIEW)</p> </div> <div style="text-align: center;"> <p>PTFZ-14-E</p>  <p>(TOP VIEW)</p> </div> </div> <div style="text-align: right; border: 1px solid black; padding: 2px; width: fit-content; margin-top: 10px;">Compatible</div>

[ Mounting dimensions ]

Product discontinuation Model PTF08/14A-E	Recommendable replacement Model PTFZ-08/14-E
<p>Mounting hole dimensions</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>PTF08A-E</p>  <p>(Top View)</p> </div> <div style="text-align: center;"> <p>PTF14A-E</p>  <p>(Top View)</p> </div> </div> <p>Note: Track mounting is also possible.</p>	<p>Mounting hole dimensions</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>PTFZ-08-E</p>  <p>(Top View)</p> </div> <div style="text-align: center;"> <p>PTFZ-14-E</p>  <p>(Top View)</p> </div> </div> <p>Note: Track mounting is also possible.</p> <div style="text-align: right; border: 1px solid black; padding: 2px; width: fit-content; margin-top: 10px;">Compatible</div>

[ Dimensions ]

Product discontinuation Model PTF08/14A-E	Recommendable replacement Model PTFZ-08/14-E
<p><b>PTF08A-E</b></p> <p>Two, 4.5 × 6 mounting holes</p> <p>8-M3.5×8</p> <p>78.5 max.</p> <p>28.5 max.</p> <p>3.4</p> <p>35.5</p> <p>8</p> <p>33 max.</p>	<p><b>PTFZ-08-E</b></p> <p>Compatible</p> <p>Two, 4.5 × 6 mounting holes</p> <p>8-M3.5×7</p> <p>78.5 max.</p> <p>28.5 max.</p> <p>3.4</p> <p>35.5</p> <p>8</p> <p>33 max.</p>
<p><b>PTF14A-E</b></p> <p>Two, 4.5 × 6 mounting holes</p> <p>7<sub>±0.2</sub></p> <p>14-M3.5×8</p> <p>78.5 max.</p> <p>45.5 max.</p> <p>3.4</p> <p>35.5</p> <p>8</p> <p>33 max.</p>	<p><b>PTFZ-14-E</b></p> <p>Two, 4.5 × 6 mounting holes</p> <p>8-M3.5×7</p> <p>78.5 max.</p> <p>45.5 max.</p> <p>3.4</p> <p>35.5</p> <p>8</p> <p>33 max.</p>

**[ Characteristics ]**

Item	Product discontinuation Model PTF08/14A-E	Recommendable replacement Model PTFZ-08/14-E
Ambient using temperature	-55~+70°C	
Ambient using humidity	5~85%RH	
Rated carry current	10A	12A(@70°C) 15A(@50°C)
Dielectric strength	Between same pole contact : AC2,000V/1min Between different pole contact : AC2,000V/1min Between coil and contact : AC2,000V/1min	Between same pole contact : AC2,500V/1min Between different pole contact : AC2,500V/1min Between coil and contact : AC2,500V/1min
Insulation resistance	1,000MΩMin. (DC500V)	
Weight	PTF08A-E : Approx.49g PTF14A-E : Approx.79g	PTFZ-08 : <a href="#">Approx.46g</a> PTFZ-14 : <a href="#">Approx.74g</a>
Safety standard certified	UL, CSA, VDE	UL, CSA, <a href="#">TUV</a>

Specifications and prices in this product news are as of the issue date and are subject to change without notice.  
Only main changes in specifications are described in this document. Please be sure to read the relevant catalogs, datasheets, product specifications, instructions, and manuals for precautions and necessary information when using products.