


Ambersil 6150009470

Penetrating Oil FG NSF Registered Low Surface Tension Lubricant 400ml

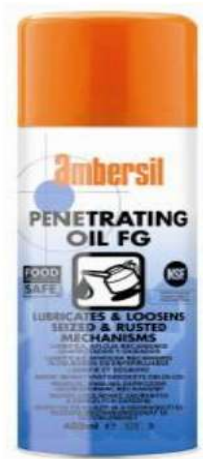

PENETRATING OIL is a high-grade lubricating agent based on a mixture of oils and penetrants in a blend of solvents. It has been formulated to offer quick and easy removal of seized and rusted components.

- Low surface tension penetrating oil to free seized parts and threaded fasteners.
- Reduces scrap rates.
- NSF H1 registered

APPLICATIONS

Ideal for freeing nuts, bolts, screws, studs, pins, valves, machine parts, pipe couplings and pulleys. Can also be used for cleaning rusted surfaces of moulds, dies and heavy tools and for softening or removing carbon deposits.

Numerous applications throughout industry, including:

- Marine
- Fork Lift Trucks
- Chemical Plants
- Manufacturing Plants
- Iron and Steel
- Engineering
- Plant and Equipment Hire
- Agricultural
- Public Works
- Quarries
- Paper Mills
- Automotive

The product frees seized components rapidly and will lubricate and protect against further corrosion. It penetrates deeply and deposits a specialised corrosion inhibiting lubricant to facilitate re-assembly. Will not damage metals, alloys, paint, rubber, plastic or wood.

Aim the spray jet directly onto the seized component from 6" - 9" (15 - 25 cm).

TECHNICAL DATA

Appearance	:	Dark grey liquid
Odour	:	Hydrocarbon
SG @ 25°C	:	0.76
Pressure @ 25°C	:	2.7 Bar
Discharge rate	:	1.3 g/sec
Solubility	:	Soluble in solvents, insoluble in water and alcohol
Flammability	:	Classified as extremely flammable under current EC Regulations
Flashpoint	:	Not applicable in sealed aerosol
Packaging		400 ml aerosol (12 per carton)

STORAGE

The product may be stored at normal ambient temperatures and has a shelf life of not less than 72 months with correct storage. Aerosols should always be stored below 50⁰C, away from direct heat and naked flame.

