



S8655P

Mini RFID Panel Antenna

865-870 MHZ 5.5 DBIC CP MINI RFID PANEL ANTENNA

The Laird S8655P is a high-performance RFID antenna lineup and is the only UHF RFID antenna available to the market that offers no-compromise performance in a small package. At only 5.2" square the antenna offers a gain specification of 5.0 dBic and axial ratio better than 2 dB. In effect the antenna is providing the performance one would expect of a much larger antenna. The antenna is not only mechanically robust but is less likely to be exposed to excessive damage by virtue of its reduced size.

FEATURES


- Low profile
- Extremely low VSWR and axial ratio
- IP 67 Rated
- Weather and UV resistant radome
- Wide range of connector options
- Left hand and right hand CP versions

APPLICATIONS

- Warehouse
- Distribution center
- Airports and hospitals
- Transit terminals
- Conveyor belt

ELECTRICAL SPECIFICATION

Antenna Part Number	S8655PR and S8655PL
Frequency Range	865 - 870 MHz
Gain	5.0 dBi
Maxium VSWR	1.5:1
3 dB Beamwidth - Azimuth	100°
Front to Back Ratio	8 dB
Polarization	Circular RH or Circular LH
Maxium Input Power	10 Watts
Input Impedence	50 Ohms
Axial Ratio	2.0 dB Typical
Weight lb. (Kg)	1.0 lbs (.45)
Mechanical Size in. (mm)	5.2" x 5.2" x .71" (132.1 x 132.1 x 17.8)
Antenna vConnection	Type N Female, RP-TNC Female, RP-SMA Female, SMA Female
Radome	White or Charcoal High Strengh PC
Mount Style	Threaded Stud 2x #10-32
Temperature Operational	-30°C to +70°C
Storage Temperature	40°C to 85°C
Impact Resistance	1 lbs. Ball Drop, 24"
Salt	MIL-STD-810
Vibration	MIL-STD-810
Shock	IEC 68-2-27
Humidity	IEC 68-2-30
Lightning Protection	DC Grounded
Enclosure Rating	IP 67

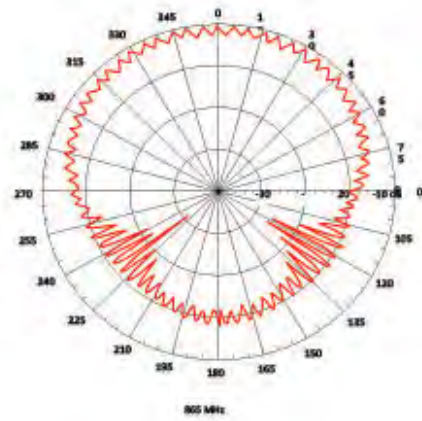

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE Connectivity, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

©2021 TE Connectivity. All Rights Reserved.

11/21 Original