

Keysight Technologies

How to Convert from a Sorensen DLM to a N5700

Application Note



Introduction

This application note provides a high-level overview of the similarities and differences between the Keysight Technologies, Inc. N5700 and the Sorensen DLM in order to help current Sorensen DLM owners easily convert from their DLM to the more capable N5700A Series. It has been designed to be used in conjunction with the N5700 User's Guide and datasheets as well as the Sorensen DLM User's Guide and datasheets. It is not a replacement for any of the manuals and it is recommended that a copy of all the documentation mentioned above be handy for reference when reading this document.¹

Three areas will be discussed in this document: electrical, programming/interfacing, and mechanical. These sections will cover such topics as the power supply's output power and protections (electrical), command compatibility and calibration (programming/interfacing), as well as size and connector type (mechanical).

Not much detail is provided comparing the advantages and disadvantages of the DLM when compared to the N5700 in this document. Please refer to the reference section provided on page 8 for details on how to obtain AN 1502-1, which is a side-by-side comparison of a DLM60-10 to an N5747A.

1. Please see the references section on page 8 for part numbers.

The N5700 System DC Power Supply

The Keysight N5700 Series System DC power supplies give you just the right performance at just the right price, in a compact (1U) package. This family of affordable 750 W and 1500 W single output programmable DC power supplies simplifies system development and are ideal for simple DC power applications. All models offer GPIB, LAN, and USB 2.0 interfaces standard.

Model Selection

Table 1 below compares the voltage, current and power ratings of the N5700 and the DLM in order to indicate how the DLM 600 W models map over to the N5700 power supplies. For example, if you own a Sorensen DLM5-75 5 V/75 A power supply it is easily replaced by a Keysight N5741A 6 V/100 A power supply. You can also see from the table that the N5700 voltage, current, and power ratings are a superset of the DLM even covering areas where the DLM has no offering, such as at 12.5 V/60 A and 100 V/7.5 A (N5743A and N5749A respectively).

Option and Accessory Selection

The DLM offers a few different options. Each DLM option is covered in the standard N5700 product so there is really no need to do anything beyond matching your current DLM to the N5700 that replaces it by using Table 1. The only exception is the RS-232 port on the DLM. The N5700 does not have an RS-232 port, however, GPIB, LAN, and USB are all standard equipment.

The following is a list of the options available for the DLM and an explanation of how the N5700 covers these options:

M9G, GPIB/RS-232 Interface¹

The N5700 does not have an RS-232 port, but does have GPIB along with LAN and USB all standard. Therefore, if you have a DLM with the M9G interface, an N5700 will easily replace your GPIB communication, while also offering you the ability to easily convert to the faster and more capable LAN and USB interfaces if desired. See the *Programming/ Interfacing* section for more details.

M13, Locking shafts for front panel potentiometers

The N5700 has no need for locking shafts. The front panel knobs are rotating pulse generators (RPGs) and can be locked from use via the "SYSTem: COMMunicate:RLState RWLock" command. This command disables the use of the front panel for changing settings, however, the settings can be viewed even when the front panel is locked.

M51A, Analog Programming Interface¹

The N5700 has an analog programming interface standard. See the Remote Analog Interface Characteristics section for more details.

Table 1. DLM to N5700 Power Supply Mapping

Sorensen DLM Series 600 W				Keysight N5700 Series 750 W ²			
Model	Voltage (V)	Current (A)	Power (W)	Model	Voltage (V)	Current (A)	Power (W)
DLM 5-75	5	75	375	N5741A	6	100	600
DLM 8-75	8	75	600	N5742A	8	90	720
N/A	N/A	N/A	N/A	N5743A	12.5	60	750
DLM 20-30	20	30	600	N5744A	20	38	760
N/A	N/A	N/A	N/A	N5745A	30	25	750
DLM 40-15	40	15	600	N5746A	40	19	760
DLM 60-10	60	10	600	N5747A	60	12.5	750
DLM 80-7.5	80	7.5	600	N5748A	80	9.5	760
N/A	N/A	N/A	N/A	N5749A	100	7.5	750
DLM 150-4	150	4	600	N5750A	150	5	750
DLM 300-2	300	2	600	N5751A	300	2.5	750
N/A	N/A	N/A	N/A	N5752A	600	1.3	780

1. When an M9G interface is installed in a DLM, the M51A and M85 interfaces cannot be installed and vice versa.

2. The N5700 Series also includes a family of 1500-W power supplies

Option and Accessory Selection (continued)

M85, Multi-channel Slave Interface¹

The N5700 has a slave interface standard. See the Parallel Operation section for more details.

Input Power Requirements

The DLM can be operated from an AC power source rated 90–132 VAC or 180–264 VAC at 43–63 Hz.

The N5700 Series was designed with active power factor correction (PFC), which allows operation to its full specifications across one continuous range of voltage that spans 85 to 265 VAC at 47–63 Hz. This range covers both ranges of the DLM, while also providing operation to specification in the range of 132–180 VAC where the DLM will not function.

AC Line Fuses

Both units should not require fuse changes during normal operation.

Regulatory Agency Compliance

All DLM units comply with the requirements of the European Low Voltage Directive and EMC Directive as required for the CE mark.

All N5700 units comply with the same or similar directives as the DLM as well as a few others, such as the US and Canadian safety standards for test and measurement products and the Australian standard for the C-tick mark.

Please refer to both manuals for the complete list of directives.

Electrical

Voltage, Current, and Power

Table 1 showed the models available in the Keysight N5700 and Sorensen DLM product families. It also showed that the N5700 Series covers more voltages and, looking only at models of similar voltage, has higher current and power ratings than any comparable DLM model. Therefore, an N5700 can replace any DLM in terms of voltage, current, and power.

Protection Features

Overvoltage Protection (OVP) Operation

The OVP monitor in the DLM provides protection from overvoltage conditions that could be generated at the load due

to improper adjustment of the output voltage or malfunction of the unit. The monitor measures the output voltage at the point where the sense leads are connected. When the OVP is tripped, the output converter is turned off and the output capacitors are discharged with a downprogrammer. The front panel OVP indicator is turned on. The OVP level can be set via the front panel potentiometer, analog control, or over the bus.

OVP in the N5700 is implemented in a very similar way and provides the same protection. When an OVP condition is detected, the output is disabled, the display shows “OVP”, the PROT indicator blinks, and OV is set in the Questionable Condition status register. The OVP level can be set via the front panel or over the bus.

Current Foldback

The DLM's current foldback operation, when enabled, will disable the power supply's output if the output current meets or exceeds the programmed current limit value.

Current foldback on the N5700 is programmed and operates in the same manner as the DLM.

Fault Shutdown

Supervisory circuits in the DLM monitor for abnormal operation of internal circuits, such as overtemperature, logic supply fault, paralleling interface connection fault, cooling fan fault, and output converter driver fault. A fault condition will result in shutdown of the output converter and the output capacitors will be discharged with the downprogrammer.

The N5700 monitors similar conditions and will initiate a shutdown if any of the following faults occur: over-voltage, over-current, over-temperature, and remote interface failure. The power supply responds to a fault by shutting down the output, the output capacitors are discharged with the downprogrammer, and “SO” is displayed on the front panel.

Current Sink (Downprogramming) Capability

Both the DLM and the N5700 have an active downprogrammer that provides for quick changes of voltage settings in the negative direction and quick shutdown.

Remote Voltage Sensing

The DLM 5–10 V units can compensate for a voltage drop of 1 V per load lead. The DLM 20–300 V units can compensate for a voltage drop of up to 2 V per load lead.

The N5700 meets or exceeds the voltage drop compensation of the DLM in all models except the 20 V (N5744A) model where the compensation is 1 V per load lead.

1. When an M9G interface is installed in a DLM, the M51A and M85 interfaces cannot be installed and vice versa.

Option and Accessory Selection (continued)

Parallel Operation

Up to four DLM units of the same model number can be connected in parallel. The paralleled units operate in a master/slave configuration, where the master controls the output voltage and total current, and provides control signals to the slaves to set their output current via a 4-wire connection.

The same capability as a DLM is available in an N5700. The main difference is that the N5700's master/slave interface involves one wire instead of the four wires required for the DLM. Set up is explained in the *Parallel Connections* section of the User's Guide.

Series Operation

Multiple units of the same DLM model can be connected in series to obtain a higher output voltage. The number of units is limited by the 300 V maximum floating voltage. Each unit is individually adjusted, with the total output voltage being the sum of the individual outputs.

Two N5700 units of the same model number can be connected in series to provide up to two times the output voltage capability within ± 60 VDC of chassis ground for models less than 60 VDC and ± 600 V of chassis ground for models greater than 60 VDC.

Transient Response

The DLM's output voltage will recover within 500 μ s to the steady-state voltage level (within 0.1% of full scale) for a 50–100% or 100–50% load step change.

All N5700 units' output voltage will recover within 2 ms to the steady-state voltage level (within 0.5% of full scale) for a 10–90% load step change. Some units recover faster than 2 ms. Please see the User's Guides of both power supplies for exact specifications.

Programming/Interfacing

Remote Interfaces

GPIO, USB, and LAN The DLM's only digital interface is the optional GPIO interface. The N5700 has GPIO standard and also includes USB and LAN in the same package. The commands that were sent to a DLM via GPIO can be sent to an N5700 via GPIO, USB, or LAN. There is also a compatibility mode built into the N5700, which allows the use of the code used with the DLM to work the same when using an N5700. Please see the Command Compatibility section below for more details.

Remote Analog Interface Characteristics

The DLM's output voltage, current, and OVP can be programmed using the analog interface either through an external voltage

signal or external resistance. The voltage programming can be done between 0–5 V or 0–10 V and the resistance programming can be done between 0–5 k Ω . Other analog capabilities include output enable/disable and remote monitoring of voltage and current.

The N5700 Series has the same capabilities as the DLM, with the addition of resistance programming from 0–10 k Ω . The only difference is the OVP cannot be programmed via the analog interface, but it can be programmed by any of the other three interfaces. When analog programming an N5700, all functions except for voltage and/or current programming (depending on whether analog programming is being done on voltage, current, or both) are available for use over the other three interfaces. The N5700's analog interface also provides the output enable/disable and remote monitoring capabilities of the DLM. The details of how to use the analog programming interface are covered in the *Analog Programming of Output Voltage and Current* section of the N5700's User's Guide.

Front Panel Controls and Indicators

Voltage Display

The DLM has a 3.5 digit, 7-segment LED display that normally indicates the output voltage, but also displays the set voltage when the V/I Preview button is pressed, or the OVP set voltage when the OVP Preview button is pressed.

The N5700 has a 4 digit, 7-segmented LED display that normally indicates the output voltage measured at the sense leads, but also displays the programmed voltage when the LIMIT button is pressed, the OVP or UVL setting when the OVP/UVL button is pressed, or the GPIO address when the REM button is pressed.

Current Display

The DLM has a 3.5 digit, 7-segment LED display that normally indicates the output current, but also displays the programmed current limit when the V/I Preview button is pressed.

The N5700 has a 4 digit, 7-segmented LED display that normally displays the current measured at the output terminals, but also displays the programmed current limit when the LIMIT button is pressed.

Voltage Control

The DLM has a 10-turn potentiometer for adjusting the output voltage. The N5700 has a rotating pulse generator (RPG) for adjusting the output voltage. There is also a FINE button that toggles between Coarse and Fine adjustment modes.

Current Control

Current control for both units is accomplished in the same manner as described above for Voltage Control.

Programming/Interfacing (continued)

Front Panel Controls and Indicators (continued)

OVP Set Control

The DLM uses a 20-turn trimmer potentiometer for adjusting overvoltage protection.

The N5700 uses the same method as for Voltage or Current Control to adjust the OVP setting after the OVP/UVL button has been pressed.

The rest of the DLM's front panel buttons and indicators, such as the preview buttons and the Fault indicator, are similar enough in operation to the N5700 to not need mention in this document. Please refer to the appropriate user's guide if more detail is needed.

Command Compatibility

The N5700 commands are compatible with the most frequently used functions of the DLM. The main compatibility gap is in the calibration procedure, which must be performed as described in the N5700 user's guide. There are also a few other exceptions that are explained below.

SCPI Command Operation

The M9G option of the DLM adds GPIB and RS-232 communication to the unit. The SCPI command set can be used to communicate with the DLM when using this option. The N5700 supports the SCPI command set and is compatible with the most frequently used functions of the DLM, however, there are some functions that are not implemented or operate differently.

- *Functions that operate differently or are missing*
OVP/Foldback

When programming the DLM there are two redundant ways to protect against overvoltage conditions. OVP can be programmed along with voltage foldback. The N5700 does not implement voltage foldback. Programming "FOLD 1" or "FOLD CV" on an N5700 will result in an error.

- *Average Measurements*

The DLM supports the averaging of 2–5 measurements. The N5700 does not have this feature.

- *The Ramp Function*

The DLM's M9G allows the user to transition from one voltage to another linearly in a specified time period. The N5700 does not have this feature.

- *Front Panel Local Lockout*

The ability to lock the front panel exists in both the DLM and the N5700; however, the commands to implement lockout differ. For more information, look up the "SYSTem:COMMunicate: RLState <LOCal|REMote| RWLock>" command in the N5700 User's Guide.

SCPI Status Model

The SCPI status models that are implemented by both the DLM and N5700 are very similar, but not identical. The N5700 is capable of handling any status programming that was implemented in the DLM, but the structure may be slightly different. If your program uses the SCPI status model of the DLM, please refer to the N5700 User's Guide in order to properly map over the status structure from the DLM to the N5700.

M9A Command Operation

The DLM M9 option supports a command set called M9A. This command set is nearly identical to the Keysight 603xA Series' command set. Since the N5700 is compatible with the Keysight 603xA Series' commands it is compatible with the M9A command set. Incompatibilities occur only with the DLY, OVP, and MASK commands. If used with the N5700, the DLY command produces error 203, the OVP is set with the OVSET command instead, and the MASK settings are set using the UNMASK command. This command set is explained in the DLM's M9 Option Programming Manual and in the N5700's User's Guide in Appendix D (referred to as compatibility with the Keysight 603xA). Please refer to these manuals for further details.

Operation with M85 Option

The DLM's M85 option enables the unit to be used as an auxiliary, or slave, unit using a 4-wire connection. The N5700's slave capability is standard in all units and uses a 1-wire connection. Setup and operation are somewhat different than the DLM, but you should find them much easier. Both topics are covered in the *Parallel Connections* section of the N5700's User's Guide.

Calibration

The DLM and the N5700's calibration procedures are different. In order to properly calibrate the N5700 please follow the instructions in the *Calibration* section of the N5700's User's Guide.

Mechanical/Physical

Mechanically the N5700 and the DLM are similar. The major difference is the width of the N5700 is roughly one rack width while the width of the DLM is roughly one-half rack width.

Size

The overall physical size of the N5700 is approximately the same except the DLM is about half the width of the N5700. Please see Table 2 (on page 7). Positive deltas indicated smaller or lighter.

Command Compatibility (continued)

Table 2. Dimensions and Weight

	DLM 600	N5700	Delta
Height	43.69mm (1.72in)	43.6mm (1.72in)	0.09mm (0.004in)
Width	214.38mm (8.16in)	422.8mm (16.66in)	-208.42mm (-8.21in)
Depth	460mm (18.12in)	481.6mm (18.96in)	-21.6mm (-0.85in)
Weight	4.4kg (9.7lbs)	7–8.5kg (15.43–18.74lbs)	-2.6 – -4.1kg (-5.73 – -9.04lbs)

Location and Cooling

A DLM is cooled by forced convection cooling with an internal fan. The fan speed is variable as a function of ambient temperature and load to extend the fan's life and reduce ambient noise. Air intake is at the front and sides of the chassis and the exhaust is at the rear and sides of the chassis.

An N5700 is cooled by fans that draw air in through the front and exhaust it out the rear. The fan speed is also variable to reduce noise and extend fan life. The instrument must be installed in a location that allows sufficient space of at least 10cm (4in) at the front and rear of the unit for adequate air circulation.

Rack Mounting

Both units can be rack mounted. The N5700 only requires the N5740A Rack-mount Slide Kit for installing in system II style cabinets. You will need to purchase the N5740A kit in order to rack mount the unit.

Input/Output Terminations

The input and output terminations of each unit are similar in location, but when switching from a DLM to an N5700 you will need to refer to the User's Guides of both units in order to properly locate each connection. Below is a comparison of the important connections.

Output Terminations/Load Connections

The DLM has bus bars with #10–32 screws for models rated from 5–60 V (low-voltage) and a terminal block for models rated from 80–300 V (high voltage). The N5700 has bus bars with M8X15 screws for models rated from 6–60 V and a terminal block for models rated from 80–600 V.

AC Input Connector

Both the DLM and the N5700 (models 750 W or less) have an IEC 320 male AC input connector. N5700 models greater than 750 W have a different AC input connector, which is a 3-terminal wire clamp located on the rear panel.

AC Input Line Cord

Both the DLM and the N5700 use the IEC 320 female connector. The N5700 uses this connector for models less than 750 W only. N5700 models greater than 750 W require a different line cord. Line cords for both power supplies will vary with the country where it is shipped. When ordering an N5700 your line cord will be appropriate to your model and destination country.

Ground Stud

The DLM has a #6–32 stud on the rear panel for terminations to chassis ground. The N5700 has two M4X8 screws located on the rear panel for making chassis ground connections.

Remote Analog Interface Connector

The DLM has a 25-position female subminiature-D connector. The N5700 has the same style 25-position connector, however, the pin-outs are different. Please refer to the N5700 User's Guide The Rear Panel – At a Glance section for the pin-outs for the J1 analog programming connector.

Remote Sense Connector

The remote sense switch on the back of the DLM must be switched to the on position for the DLM to use remote sensing. There is a 2-position Molex connector that connects the + and – remote sense leads to the DLM.

The N5700 does not require the use of a switch to go from remote to local sensing and vice versa. There is a remote sense connector on the rear of the unit with wires jumpered between the + and – local and remote sense leads. The connector is a 5-position quick disconnect Phoenix.

Paralleling Interface Connector

The DLM uses two six-position Molex connectors for use with the Paralleling Cable, Sorensen part number DLMP1. The N5700 uses pin 25 of the J1 analog programming connector for parallel operation.

References:

[1] *How to Convert from a Xantrex XFR to a Keysight N5700*
Application Note 1503-2
5989-1631EN

[1] *Side-by-Side Comparison:*
Keysight N5700 Series System DC Source and Sorensen DLM Power Supply
Application Note 1502-1
5989-1628EN

[1] (Page 3) *Side-by-Side Comparison:*
Keysight N5700 Series System DC Source and Xantrex XFR System DC Power Supplies
Application Note 1502-2
5989-1630EN

[2] *Keysight N5700 Series Data Sheet*
5989-1330EN

[3] *Trends in Medium Power (~1 kW) DC Power Supplies*
5989-1331EN


[4] *Keysight N5700 System DC Power Supply User's Guide*
5969-2917EN

[5] *Keysight N5700 Product Reference CD-ROM*
5969-2918EN

Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.

From Hewlett-Packard to Agilent to Keysight.

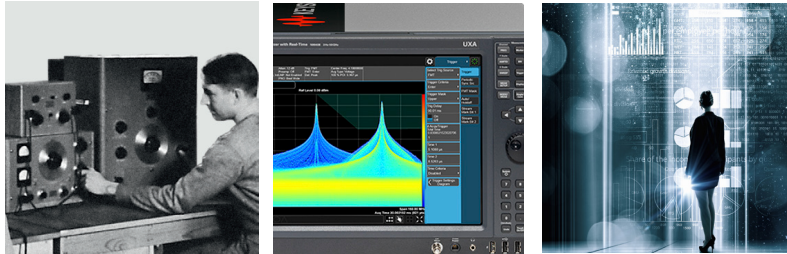

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

http://www.keysight.com/find/emt_product_registration

Register your products to get up-to-date product information and find warranty information.

KEYSIGHT SERVICES

Accelerate Technology Adoption.
Lower costs.

Keysight Services

www.keysight.com/find/service

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

This was formerly known as application note 1503-1

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:

www.keysight.com/find/contactus
(BP-9-7-17)

DEKRA Certified
ISO 9001 Quality Management System

www.keysight.com/go/quality
Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2015
Quality Management System



This information is subject to change without notice.
© Keysight Technologies, 2017
Published in USA, December 1, 2017
5989-1631EN
www.keysight.com