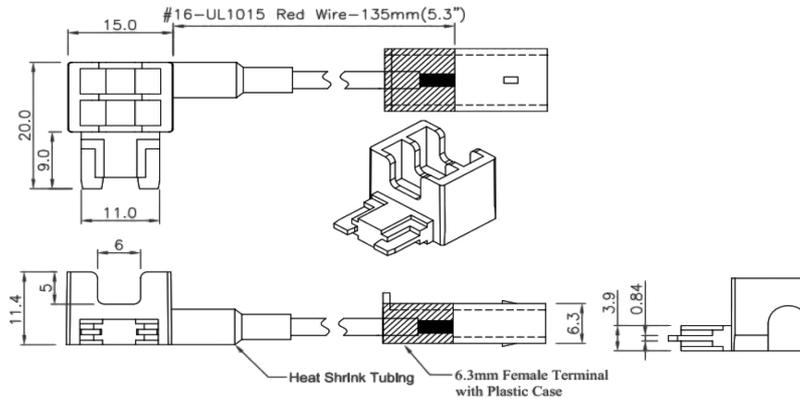# Fuse Holder

RoHS Compliant

Specification

- Cable Wire:#16-UL1015 Red Wire-127mm±5mm(5"). Applicable Fuse: (Low Profile Mini Fuse)
- Max. Installation rating up to 15 Amps , Butt Splice connectors pull-out force min. 15kg.
- *Easy to use: plugs into Occupied or vacant energized fuse block slot. Easy installation of additional circuits without splicing or cutting
- *Versatility: Use when hardwiring or adding LED strips, dash cams or other electronic devices that require direct wiring into the fuse box

Diagram

#16-UL1015 Red Wire-135mm(5.3")

15.0
20.0
9.0
11.0

6
5
11.4

Heat Shrink Tubing

6.3mm Female Terminal with Plastic Case

3.9
0.84
6.3

AWG	mm	inch	(mm²)	(Ω/km)	(A)	(A)
16	1.29	0.0508	1.318	13.5	5.2	5.9

Part Number Table

Dimensions : Millimetres

Description	Part Number
Inline Fuse Holder - Battery link Extension	MP013626

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicomp PRO