Glimmlampen Signalleuchten Ø 14 mm
Neon Indicators Ø 14 mm

Für 110 VAC und 230 VAC
For 110 VAC and 230 VAC

Bestell-Nr. Part No.	Farbe Colour	$V_{OPeff\ nom.}$ (V)	$I_{OPeff\ max.}$ (mA)	$V_{OPeff\ max.}$ (V)	$I_{V\ typ.}$ (mcd)
1931*130	Rot Red	110	2,2	135	32,5
1931*131	Grün Green	110	1,5	135	26,0
1931*134	Orange Amber	110	2,2	135	61,0
1931*135	Blau Blue	110	1,5	135	7,5
1931*230	Rot Red	230	2,2	250	32,5
1931*231	Grün Green	230	1,5	250	26,0
1931*234	Orange Amber	230	2,2	250	61,0
1931*235	Blau Blue	230	1,5	250	7,5

Abmessungen, siehe Zeichnungsnr.
Dimensions, see Drawing No. 19300

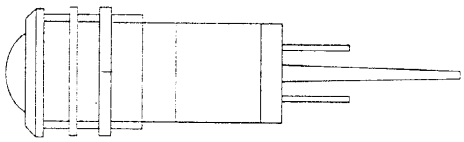

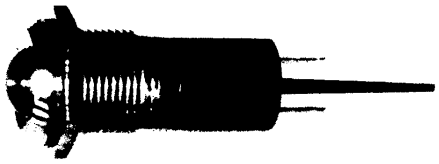

Mit Trennschutz / with isolating spacer

Arbeitstemperatur (T_{OP}): -55°C - +100°C
Lagertemperatur (T_{STG}): -55°C - +100°C

* Die Signalleuchte kann mit Glanzchrom oder Schwarzchrom geliefert werden. Die 5. Stelle der Bestellnummer wird mit 0 oder 1 codiert.

Glanzchrom = 0 Schwarzchrom = 1

Beispiel: 1931**0**130 rot mit Glanzchrom
1931**1**130 rot mit Schwarzchrom

ACHTUNG: **Vorschriften und Richtlinien zur Handhabung und Anwendung, siehe Seite 35.**

Led Signalleuchten mit anderen Spannungen auf Anfrage
Technische Änderungen vorbehalten

Operating temperature (T_{OP}): -55°C - +100°C
Storage temperature (T_{STG}): -55°C - +100°C

* The Led indicator can be delivered in bright or black chrome reflector. The 5. digit has to be coded with 0 or 1.

Bright chrome = 0 Black chrome = 1

Example: 1931**0**130 red with bright chrome
1931**1**130 red with black chrome

ATTENTION: **Regulations and guide-lines for applications and handling, see page 35.**

Led Indicators with other voltages upon request
Specification subject to change without notice