

AUTOMATIC FIRE EXTINGUISHERS - WALL MOUNTED






ABC POWDER-MAP 50 (PRODUCT OVERVIEW)

Ceasefire's Automatic Fire Extinguisher addresses two problems of fire safety and space crunch. It is ideal for spaces that are not just prone to fire but also have limited space, where installing an extinguisher can be a challenge.

These extinguishers are available in powder-based variants. Being wall mounted units; they are able to put out fires in areas that are beyond the reach of normal fire extinguishers. Ceasefire Automatic Extinguishers detect the rising temperature of the area and activate automatically, even when there is no one present, ensuring that the fire is brought under control early and efficiently.



ENGINEERING DRAWINGS

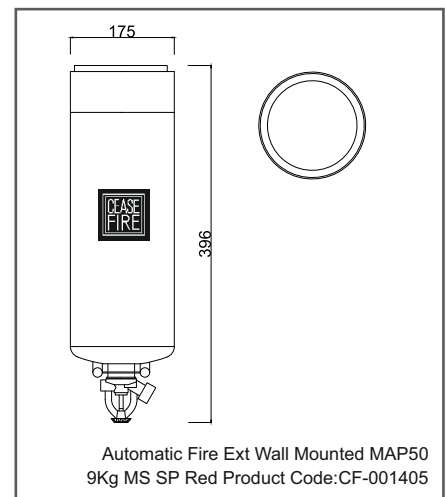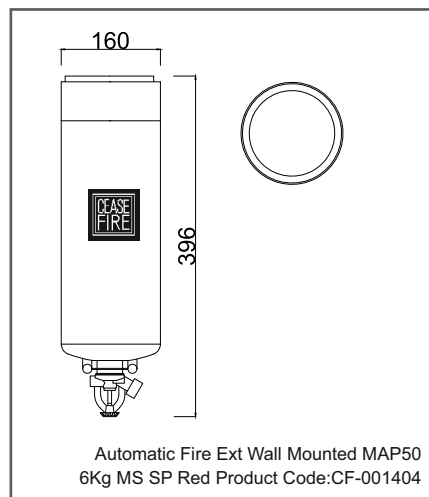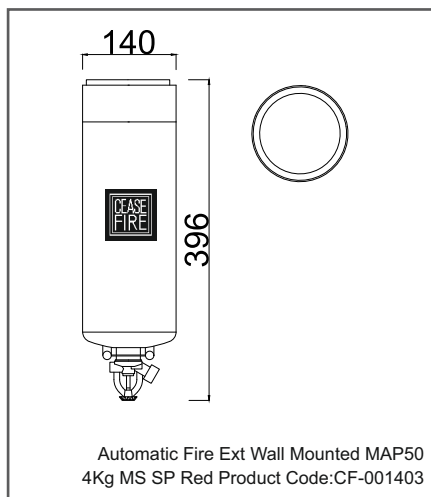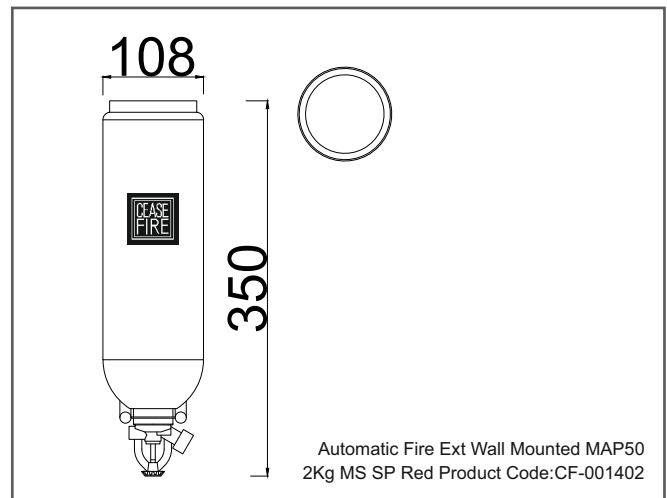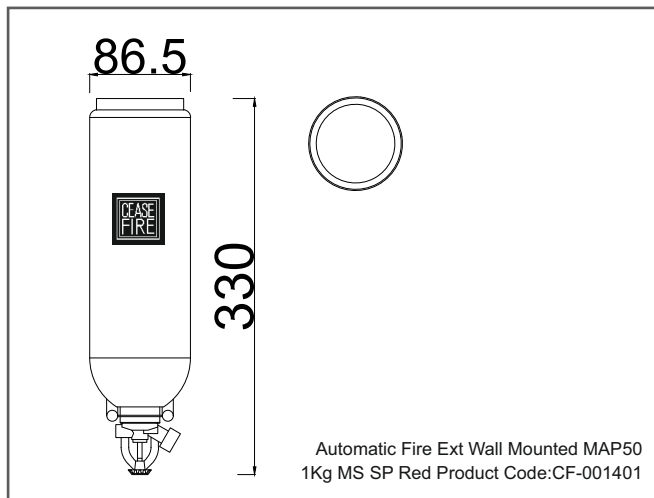



TECHNICAL SPECIFICATIONS

Product Code	UOM	CF-001401	CF-001402	CF-001403	CF-001404	CF-001405
Description	—	Automatic Fire Ext wall mounted MAP50 1Kg MS SP Red	Automatic Fire Ext wall mounted MAP50 2Kg MS SP Red	Automatic Fire Ext wall mounted MAP50 4Kg MS SP Red	Automatic Fire Ext wall mounted MAP50 6Kg MS SP Red	Automatic Fire Ext wall mounted MAP50 9Kg MS SP Red
Capacity of Agent	KG	1 ± 5%	2 ± 3%	4 ± 2%	6 ± 2%	9 ± 2%
Certification	—	PED UKCA-PED	PED UKCA-PED	PED UKCA-PED	PED UKCA-PED	PED UKCA-PED
Diameter of Shell	MM	86.5	108	140	160	175
Total Height (approx.)		330	350	396	446	577
MOC of Shell	—	Steel CR2(DC01)	Steel CR2(DC01)	Steel CR2(DC01)	Steel CR2(DC01)	Steel CR2(DC01)
Min. Wall Thickness	MM	1.6	1.6	1.6	1.6	2
Test Pressure	BAR	30	30	30	30	30
Anti-Corrosive Treatment	—	Outer surfaces were EP Powder coated having Thickness 50 Micron Min. RAL Shade 3000	Outer surfaces were EP Powder coated having Thickness 50 Micron Min. RAL Shade 3000	Outer surfaces were EP Powder coated having Thickness 50 Micron Min. RAL Shade 3000	Outer surfaces were EP Powder coated having Thickness 50 Micron Min. RAL Shade 3000	Outer surfaces were EP Powder coated having Thickness 50 Micron Min. RAL Shade 3000
Service Pressure	BAR	15	15	15	15	15
Type of Operating Mechanism	—	Automatic	Automatic	Automatic	Automatic	Automatic
Type of Pressure Gauge	—	Magnetic Bourdon Tube Type	Magnetic Bourdon Tube Type	Magnetic Bourdon Tube Type	Magnetic Bourdon Tube Type	Magnetic Bourdon Tube Type
Type of Dis. Fitting & Length	MM	Direct Nozzle	Direct Nozzle	Direct Nozzle	Direct Nozzle	Direct Nozzle
Throw	METER	NA	NA	NA	NA	NA



Product Code	UOM	CF-001401	CF-001402	CF-001403	CF-001404	CF-001405
Min. Discharge Time	SEC.	1	1.2	2.5	3.5	5
Fire Rating	—	NA	NA	NA	NA	NA
Operating Temperature Range	°C	79°C+ 4°C	79°C+ 4°C	79°C+ 4°C	79°C+ 4°C	79°C+ 4°C
Applicable to Type of Fire	—	A, B, C, & Electrical Started Fire	A, B, C, & Electrical Started Fire	A, B, C, & Electrical Started Fire	A, B, C, & Electrical Started Fire	A, B, C, & Electrical Started Fire
Coverage Area	M ²	1.6	2.3	6.3	9.8	19.2
Filled Weight Range**	KG	1.8	3.3	6	8.7	12.9
Packed Weight Range (approx)***	KG	2.68	4.2	7.45	10.1	15.5
Packed Size Length x Width x Height	MM	125 X 115 X 400	130 X 140 X 415	160 X 160 X 470	175 X 175 X 715	190 X 195 X 650
Product Warranty	YEAR	5	5	5	5	5

**It includes Empty Extinguisher, Contents, QBD and bracket.

***It includes Empty Extinguisher, Packaging, Contents, QBD and bracket.

QUARTZOID BULB KEY

● 57°C / 135°F ● 68°C / 155°F ● 79°C / 174°F ● 93°C / 200°F ● 141°C / 286°F

● 182°C / 360°F ● 227°C / 440°F

CERTIFICATIONS



PRODUCT PICTURES



*v2' Published Date is 14-07-2023.

**Regular R&D and product improvisations may lead to change in product specifications in this data sheet, without any prior notice.

CEASEFIRE INDUSTRIES UK LIMITED

Call us at: 0-113-868-6666, 0-126-891-9999

www.ceasefire.co.uk