



Relays & Contactors > Electromechanical Relays



Relay & Contactor Type: **General Purpose Power Relay**

Coil Magnetic System: **Monostable**

Contact Arrangement: **1 Form C SPDT-CO**

Current Type: **DC**

Contact Current Rating: **8 A**

Features

Product Type Features

Relay & Contactor Type	General Purpose Power Relay
------------------------	-----------------------------

Operation/Application

Coil Magnetic System	Monostable
Current Type	DC
Solder Process	Wave Solder

Configuration Features

Contact Arrangement	1 Form C SPDT-CO
Contact Number of Poles	1

Electrical Characteristics

Contact Current Rating	8 A
Coil Voltage Rating	12 VDC
Contact Voltage Rating	250 VAC
Coil Power Rating DC	.5 W
Insulation Initial Dielectric Between Contacts & Coil	4000 Vrms
Contact Limiting Making Current	16 A
Contact Limiting Continuous Current	8 A
Insulation Initial Dielectric Between Open Contacts	1000 Vrms
Coil Current	.044 A
Contact Switching Voltage (Max)	400 VAC



Coil Resistance	270 Ω
-----------------	-------

Termination Features

Main Termination & Connection Type	Solder Pins
Coil Termination & Connection Type	Solder Pins

Mechanical Attachment

Product Mount Type	Printed Circuit Board
--------------------	-----------------------

Body Features

Enclosure Type	Flux Resistant Automatic Soldering
Product Weight	18 g[.635 oz]

Usage Conditions

Environmental Ambient Temperature (Max)	70 °C[158 °F]
Operating Temperature Range	-40 – 70 °C[-40 – 158 °F]
Environmental Category of Protection	RTII

Other

Height Class (Mechanical)	25 – 30 mm
Length Class (Mechanical)	25 – 30 mm
Width Class (Mechanical)	12 – 16 mm
EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant
Coil Power Rating Class	.5 – .6 W
Contact Current Class	5 – 10 A
Environmental Ambient Temperature Class	-40 – 70 °C

Contact Features

Contact Plating Material	Silver Nickel
Contact Material	AgNi0.15

Dimensions

Insulation Clearance Between Contact & Coil	8 mm[.315 in]
Insulation Creepage Between Contact & Coil	8 mm[.315 in]
Product Width	12.6 mm[.496 in]
Product Length	29 mm[1.14 in]
Product Height	25.5 mm[1 in]

Packaging Features



Packaging Method	Box & Tube
------------------	------------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) SVHC > Threshold: Methanone, (diphenylphosphinyl)(2,4,6-trimethylphenyl)- (2% in Component Part) <b>Article Safe Usage Statements:</b> Wash thoroughly after handling. Do not handle until all safety precautions have been read and understood. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts






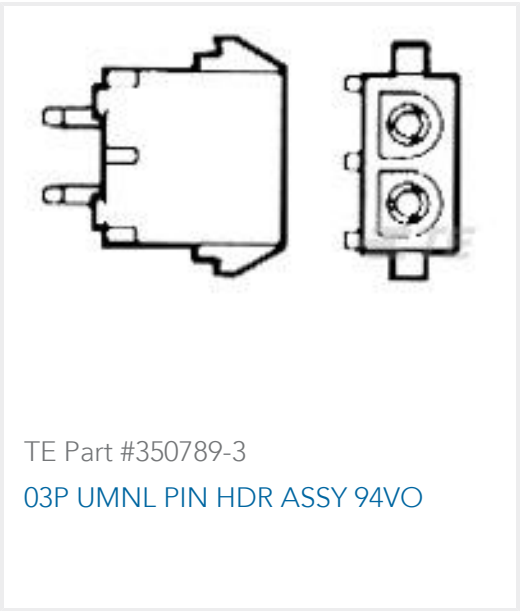
Customers Also Bought




TE Part #1-1393210-8  
T9AS1D12-24




TE Part #5-1393239-4  
RT214012




TE Part #350789-3  
03P UMNL PIN HDR ASSY 94VO




TE Part #5520257-2  
MJ,TE,4P,PNL STOPS




TE Part #1-1393238-9  
RTB14024




TE Part #4-1393240-5  
RT334012




TE Part #1415039-1  
RTH34024



TE Part #4-1393224-3  
RY211006



TE Part #1838275-3  
M12 Fld Ser CONN. Male Pin Sldr



TE Part #5-1393236-7  
V23092-A1905-A301

Documents

- CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1-1393231-1\_A.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-1393231-1\_A.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-1393231-1\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

- Datasheets & Catalog Pages

Power PCB Relay RPII/1

English



Product Specifications

Definitions General Purpose Relays

English

Agency Approvals

VDE Certificate

English