

Double Loop Cable Ties



Product Details:


Material Natural: Polyamide 6.6 natural
 Material Black: Polyamide 6.6 natural+ ~1-2% carbon black
 Flammability of raw material : UL 94 - V2
 Humidity absorption: 2,4% (23° C - 50% R.H.)
 Installation temperature: -10° C ÷ +85° C
 Working temperature: -40° C ÷ +85° C
 Max sustainable temperature for short time: +110°C
 Carbon black addition gives a better UV resistance
 Halogen Free

Standards:

RoHS, Reach, PAHs Compliance

Application:

Good resistance to bases, oils, greases, oil derivatives, chloride solvents. Limited resistance to acids. Not resistant to phenols.

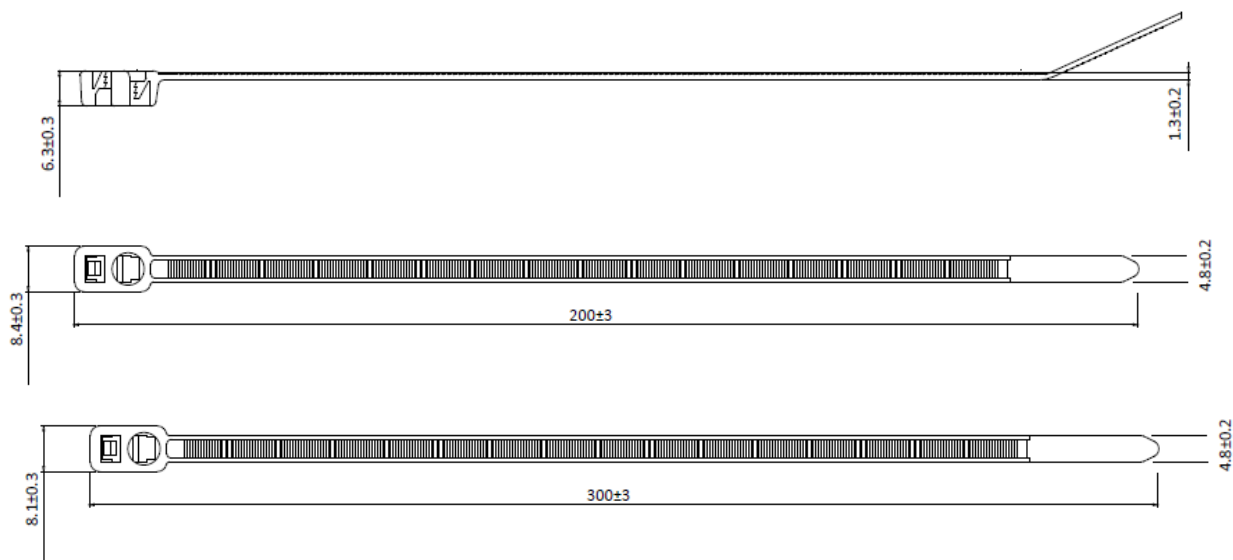

| Part No. | Size | Max.Bundle | Min.Bundle | Tensile Strength | Pack Size |
|---------------|---------|------------|------------|------------------|-----------|
| ADLCT200X4.8B | 200X4.8 | 46.5mm | 3.0mm | 230N | 100 |
| ADLCT200X4.8N | 200X4.8 | 46.5mm | 3.0mm | 230N | 100 |
| ADLCT300X4.8B | 300X4.8 | 85.3mm | 3.0mm | 230N | 100 |
| ADLCT300X4.8N | 300X4.8 | 85.3mm | 3.0mm | 230N | 100 |