

**GLS BULB B22 1055LM 8W 5000K NON-DIMM 240 BEAM FROSTED
INTEGRAL**

ILGLSB22NF016



This 9.5W retro-fit Integral LED Classic Globe (GLS) (large bayonet base) delivers a cool white light and brightness, similar to a 75W filament bulb. It features high output LEDs, an anti-glare refractor, all finished in an aluminium and plastic, thermally efficient body. Ideal for living rooms, hallways and kitchens.

Details

| | |
|--------------------------|---------------------------------------|
| Barcode: | 5055788208518 |
| Quick Order Code: | 852564 |
| Category: | Lamps |
| Range Name: | Everyday |
| Product Type: | GLS |
| Market Segment: | Commercial indoor, Residential indoor |
| Warranty (Years): | 2 |
| CE RoHS: | Yes |

Physical Data

| | |
|---------------------------------|---|
| Product Length (mm): | 105 |
| Product Width (mm): | 60 |
| Product Weight (g): | 32 |
| Material: | Aluminium, Polycarbonate |
| Base Term: | Bayonet cap |
| Bulb Base: | B22 |
| Construction: | Aluminium and Plastic heat-sink, Injection moulded diffuser |
| Globe Finish: | Frosted |
| Globe Type: | GLS |
| Bulb or Luminaire Shape: | Round |
| Placement / Application: | Indoor, General Lighting |

Electrical Data

| | |
|--------------------------------|---------|
| Power (W): | 8 |
| Power Consumption (W) : | 8 |
| Power Factor: | 0.5 |
| Voltage Range (v): | 220-240 |



| | |
|--------------------------------|--------------|
| Wattage equivalent (W): | 75 |
| Amperage (mA): | 60 |
| Dimming: | Non-Dimmable |
| Driver Included: | Yes |
| Electric Current: | AC |
| EN: | EN-62560 |
| LVD Certified: | Yes |

Light Data

| | |
|---|------------------------------|
| Luminous Flux in Lumens (lm): | 1055 |
| Luminous efficacy (lm/W): | 131 |
| Correlated Colour Temperature (CCT) (K): | 5000 |
| Colour Temperature: | 5000K - Daylight |
| Colour Temperature Name: | Daylight |
| Beam Angle: | 240 |
| Colour Rendering Index (CRI): | 80 |
| Frequency Range (Hz): | 50/60 |
| Instant on (Less than 1 second): | Yes |
| LED Type: | Surface mounted device (SMD) |
| Lifetime (hours): | 15000 |
| Switching Cycles: | 50000 |

Environment

| | |
|--|----------|
| EN: | EN-62560 |
| LVD Certified: | Yes |
| CE RoHS: | Yes |
| Previous Energy Rating: | A+ |
| New Energy Rating: | E |
| Hg 0% (Mercury Free): | Yes |
| IP Rating (Ingress Protection): | IP20 |
| Lowest Operating Temperature (°C): | -20 |
| Maximum Operating Temperature (°C): | 40 |

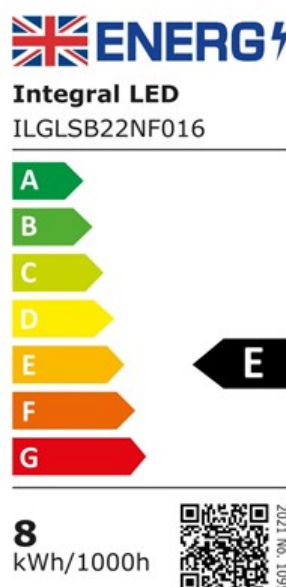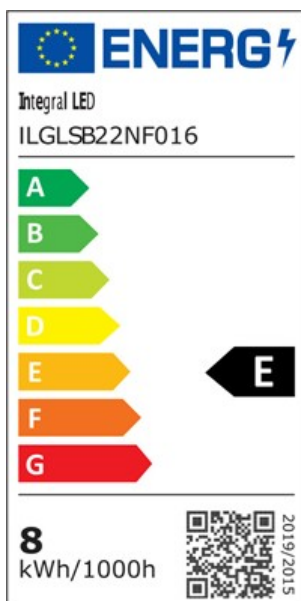

Packaging

Portal.integral-led.com

| | |
|-----------------------------|--------|
| | 40, 72 |
| Package Weight (g): | 120 |
| Package Length (mm): | 65 |
| Package Width (mm): | 65 |
| Package Depth (mm): | 1440 |
| Qty per euro pallet: | |