




Color: white

Similar to illustration

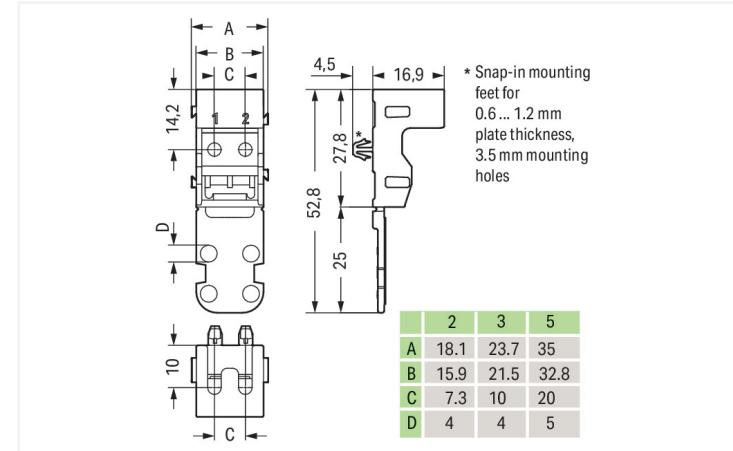

Dimensions in mm

### Physical data

Width	35 mm / 1.378 inches
Height	21.4 mm / 0.843 inches
Height from the surface	16.9 mm / 0.665 inches
Depth	52.8 mm / 2.079 inches

### Mechanical data

Mounting type	with snap-in mounting foot for horizontal mounting
Suitable	for 5-wire connectors (4 mm <sup>2</sup> )

### Material data

Note (material data)	<a href="#">Information on material specifications can be found here</a>
Color	white
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0 MJ
Weight	4.9 g

### Commercial data

PU (SPU)	50 (10) pcs
Packaging type	Box
Country of origin	CN
GTIN	4055143640893
Customs tariff number	39269097900

**Product classification**

UNSPSC	39121409
eCl@ss 10.0	27-14-11-92
eCl@ss 9.0	27-14-11-92
ETIM 9.0	EC002848
ETIM 8.0	EC002848
ECCN	NO US CLASSIFICATION

**Environmental Product Compliance**

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

**Downloads****Environmental Product Compliance****Compliance Search**Environmental Product  
Compliance 221-515**Documentation****Bid Text**

221-515	19.02.2019	xml 2.73 KB	
221-515	04.01.2018	doc 24.00 KB	

**CAD/CAE-Data****CAD data**

2D/3D Models 221-515

**CAE data**EPLAN Data Portal  
221-515

ZUKEN Portal 221-515

**1 Compatible Products****1.1 Optional Accessories****1.1.1 Marking****1.1.1.1 Marking strip**[Item No.: 210-833](#)Marking strips; 25 m on roll; 6 mm wide;  
plain; Self-adhesive; white

## Installation Notes



Inserting a connector into the mounting carrier.



Removing a connector from the mounting carrier.

## Conductor termination



Inserting a conductor.



Horizontal screw mounting



Vertical screw mounting



Horizontal mounting via snap-in foot



Vertical mounting via snap-in foot

## Strain relief



Use a cable tie to secure the conductors to the strain relief plate.



The strain relief plate can be removed.

## Testing



Testing a connector mounted on the carrier via test slot.

## Application



Connecting a light to the mains.

## Marking



Labeling the mounting carrier.