


Color: ■ gray

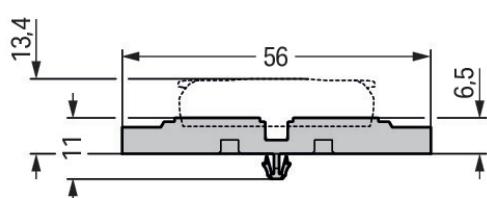

**Physical data**

Width	47.8 mm / 1.882 inches
Height	11.03 mm / 0.434 inches
Height from the surface	6.5 mm / 0.256 inches
Depth	56 mm / 2.205 inches

**Mechanical data**

Design	5-way
Mounting type	Snap-in foot

**Material data**

Note (material data)	<a href="#">Information on material specifications can be found here</a>
Color	gray
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.232 MJ
Weight	7.7 g

**Commercial data**

PU (SPU)	25 (5) pcs
Packaging type	Box
Country of origin	CN
GTIN	4066966120011
Customs tariff number	39269097900

**Product classification**

UNSPSC	39121702
ETIM 9.0	EC002848
ETIM 8.0	EC002848
ECCN	NO US CLASSIFICATION

**Environmental Product Compliance**

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

**Downloads****Environmental Product Compliance****Compliance Search**

Environmental Product  
Compliance 221-2535



## CAD/CAE-Data

## CAD data

2D/3D Models  
221-2535

## CAE data

EPLAN Data Portal  
221-2535ZUKEN Portal  
221-2535

## 1 Compatible Products

## 1.1 Optional Accessories

## 1.1.1 Installation

## 1.1.1.1 Mounting accessories

**Item No.: 209-119**  
Fixing screw; for 209-120 mounting carrier**Item No.: 209-123**  
Mounting foot with screw; can be screwed on terminal blocks with fixing flange; 6.4 mm wide; gray**Item No.: 209-120**  
Mounting foot; can be snapped on terminal blocks with snap-in mounting foot; for mounting on relay-modules; 6.4 mm wide; gray

## 1.1.2 Marking

## 1.1.2.1 Marking strip

**Item No.: 210-834**  
Marking strips; on reel; 5 mm wide; plain; Self-adhesive; white

## Installation Notes

## Installation



Place the inline splicing connector on the carrier in front of the mounting position.

Push the connector to the center position until it snaps into place.

Mounting carrier without strain relief – snapped onto DIN-rail

## Strain relief



3-pole mounting carrier with strain relief



Various combinations of 1- to 5-connector mounting carriers are possible via side-by-side latching mechanism.