

POWER QUALITY / ENERGY ANALYZERS, METERS & LOGGERS

THREE-PHASE POWER QUALITY ANALYZERS



POWERPAD® III MODELS 8333 & 8336

SD card for trend recordings and data storage, extensive memory for high snapshot quantity, captured transients/inrush and alarm events



8333

8336



* 3 YEAR WARRANTY
ONLY APPLIES WHEN
METER IS REGISTERED
WITHIN 30 DAYS OF
PURCHASE



DataView®



SCAN TO
LEARN
MORE

PRODUCT INCLUDES

CAT. #2136.10 MODEL 8333 (NO PROBES)

Extra large carrying bag, soft carrying pouch, (4) 10 ft black voltage leads with alligator clips, 5 ft USB cable, (12) color-coded input ID markers, (110/240) V power adapter with US power cord, 9.6 V NiMH battery, SD card, printed quick start guide and USB drive with DataView® software and user manual.



CAT. #2136.30 MODEL 8336 (NO PROBES)

Extra large carrying bag, soft carrying pouch, (5) 10 ft black voltage leads with alligator clips, 5 ft USB cable, (12) color-coded input ID markers, (110/240) V power adapter with US power cord, SD card, 9.6 V NiMH battery, printed quick start guide, and USB drive with DataView® software and user manual.

KIT OPTIONS

8333

AS ABOVE WITH AMPFLEX®
193 FLEXIBLE CURRENT PROBE
(10 kA) CAT. # 2136.11
24 IN, RATED 600 V CAT IV

OR

AS ABOVE, MN193 CURRENT
PROBE (5/100 A)
CAT. # 2136.12
Rated 600 V CAT III



8336

AS ABOVE WITH AMPFLEX®
193 FLEXIBLE CURRENT PROBE
(10 kA) CAT. # 2136.31
24 IN, Rated 600 V CAT IV

OR

AS ABOVE, MN193 CURRENT
PROBE (5/100 A)
CAT. # 2136.32
Rated 600 V CAT III



MODELS	8333	8336
Input Terminals	4 voltage / 3 current	5 voltage / 4 current
Inputs	3 voltage / 3 current	4 voltage / 4 current
Voltage (TRMS AC+DC)	(2 to 1000) V	
Voltage Ratio	up to 500 kV	
Current (TRMS AC+DC)	MN93: 500 mA to 200 A _{AC} ; MN193: (0.005 to 100) A _{AC} SR193 Clamp: (1 to 1000) A _{AC} AmpFlex® or MA193 Clamps: 100 mA to 10000 A _{AC} MR193 Clamp: (1 to 1000) A _{AC} / 1300 A _{DC} SL261 Clamp: 50 mA to 100 A _{AC/DC} Current Ratio: up to 60 kA	
Frequency (Hz)	(40 to 69) Hz	
Distribution Systems	1P 2W, 1P 3W, 2P 2W, 2P 3W, 2P 4W, 3P 3W, 3P, 4W, Split-Phase 2W & 3W and Aron meters	1P 2W, 1P 3W, 2P 2W, 2P 3W, 2P 4W, 3P 3W, 3P, 4W and 3P 5W, 2 ½ Element and Aron meters
Power Values	W, VA, var, VAD, PF, DPF, cos Φ, tan φ	
Energy Values	Wh, varh, VAh, VADh	
Harmonics	1 st to 50 th , Direction, Sequence; THD: 0 to 50, phase	
Transients	up to 50	up to 210
Flicker (Pst / Plt)	Yes / No	Yes / Yes
Unbalance	Yes	
Recording	Yes	
Alarm Mode	10 types; 4000 recorded	40 types; 16,000 recorded
Peak	Yes	
Phasor Display	Automatic	
Display	Color ¼ VGA TFT screen (320 x 240) diagonal 5.82 in (148 mm)	
Snapshots	12	50
Languages	> 27	
Communication Interface	USB	
MECHANICAL		
Battery Life	≤ 10 h, ≥ 15 h in Record mode	
Power Supply	9.6 V NiMH rechargeable battery pack (included) External AC supply: (110 / 230) V _{AC} ±10 % (50 / 60) Hz	
Dimensions	(9.8 x 7.8 x 2.6) in (249 x 198 x 66) mm	
Weight	4.3 lb (1.95 kg)	
SAFETY		
Safety Rating / IP	IEC 61010, 1000 V CAT III; 600 V CAT IV / IP53	

Consult factory for NIST Calibration prices.

POWER QUALITY / ENERGY ANALYZERS, METERS & LOGGERS

THREE-PHASE POWER QUALITY ANALYZERS

**Captures and Records
Transients, Events & Waveforms
Simultaneously!**

FEATURES


- True RMS single-, two- and three-phase measurements at 256 samples/cycle, plus DC
- Real-time color waveforms
- Easy-to-use on-screen setup
- Automatic current probe recognition and scaling
- True RMS voltage and current measurement
- Measures DC volts, amps and power
- Displays and captures voltage, current and power harmonics to 50th order, including direction, in real-time
- Captures transients down to 1/256th of a cycle
- Stores comprehensive data base of logged data
- Phasor diagram display
- kVA, kvar and kW per phase and total
- kVAh, kvarh and kWh per phase and total
- Neutral current calculated and displayed for three-phase
- Transformer Factor K display
- Power Factor, displacement PF display
- Captures up to 210 transients (Model 8336)
- Short term (Model 8333) and Long term (Model 8336) flicker display
- Phase unbalance (current and voltage)
- Harmonic Distortion (total and individual) from 1st to 50th
- Alarms, surges and sags
- Screen snapshot function captures waveforms or other information on the display
- Includes FREE DataView® software for configuring, data retrieval, real-time display, analysis and report generation

ACCESSORIES/REPLACEMENTS

- CAT. #2133.73** Extra Large Classic Tool Bag (18 x 9 x 12) in
- CAT. #2140.19** 9.6 V NiMH Rechargeable Battery
- CAT. #2140.28** AC/DC Current Probe Model MR193-BK
- CAT. #2140.32** AC Current Probe Model MN93-BK
- CAT. #2140.33** AC Current Probe Model SR193-BK
- CAT. #2140.34** AmpFlex® Sensor 24 in Model 193-24-BK
- CAT. #2140.35** AmpFlex® Sensor 36 in Model 193-36-BK
- CAT. #2140.36** AC Current Probe Model MN193-BK

CAT. #	DESCRIPTION
2136.10	PowerPad® III Model 8333 (no probes)
2136.11	PowerPad® III Model 8333 w/3 193-24-BK Sensors
2136.12	PowerPad® III Model 8333 w/3 MN193-BK Probes
2136.30	PowerPad® III Model 8336 (no probes)
2136.31	PowerPad® III Model 8336 w/4 193-24-BK Sensors
2136.32	PowerPad® III Model 8336 w/4 MN193-BK Probes

Large Functional Displays

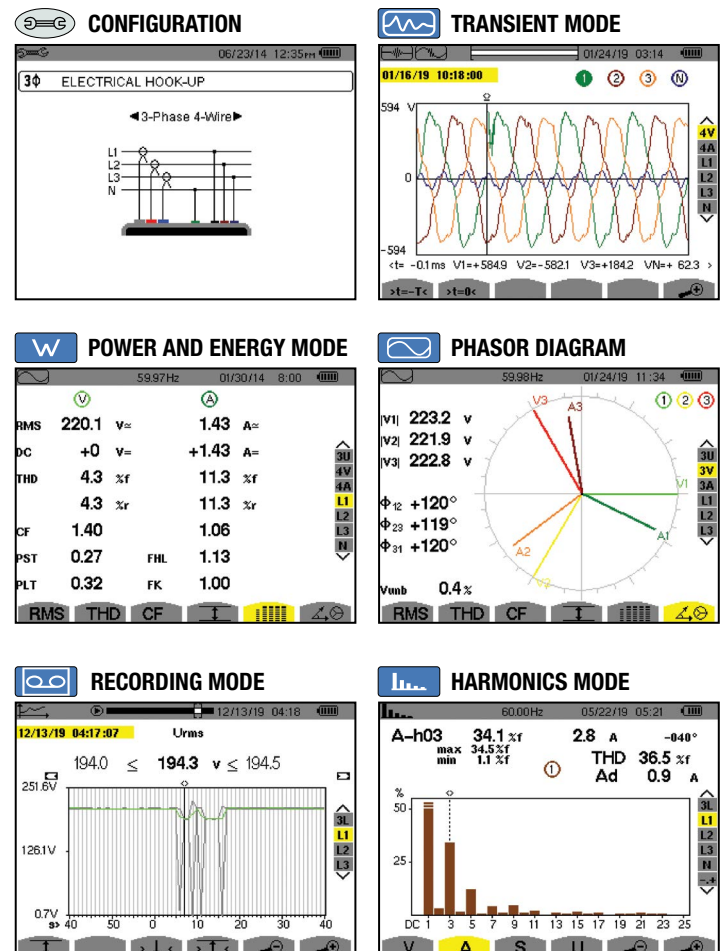

CAT. #1201.51 AC/DC Current Probe Model SL261

CAT. #2140.40 BNC Adapter for AC/DC Current Probe Model SL261 and models for use with 8220, 8333, 8335, 8336, 8435, 8436 & PEL Series

CAT. #2140.44 (1) 10 ft (3 M) Black Lead w/(1) Black Alligator Clip (Lead rated 1000 V CAT IV 15 A, Clip rated 1000 V CAT IV 15 A, UL)

CAT. #2140.48 MiniFlex® Sensor 10 in Model MA193-10-BK

CAT. #2140.50 MiniFlex® Sensor 14 in Model MA193-14-BK


CAT. #2140.80 MiniFlex® Sensor 24 in Model MA194-24-BK

CAT. #2140.77 Phase Power Adapter (8333 & 8336)

CAT. #5000.14 Power cord 115 V for Micro-ohmmeters, Megohmmeters, Power Instruments, Oscilloscopes & Ground Testers

CAT. #5000.99 Clip – Safety alligator (black) (1000 V CAT IV, 15 A, UL V2)

POWER QUALITY / ENERGY ANALYZERS, METERS & LOGGERS OPTIONAL ACCESSORIES

MODEL	MAX CONDUCTOR SIZE	ACCURACY (TYPICAL)	TYPICAL ERROR ON Φ AT (50 / 60) HZ	CURRENT RANGE	USED WITH MODEL	CAT. #
MiniFlex® Model MA193-10-BK* & MiniFlex® Model MA193-14-BK* & MiniFlex® Model MA194-24-BK* 	2.75 in (70 mm) (10 in sensor)	± 1 %	0.5 °	100 mA to 12,000 A _{AC} ⁽¹⁾	PEL 52 PEL 112 PEL 113 PEL 115 8333 8336 8436 8345	2140.48 (10 in sensor)
	3.94 in (100 mm) (14 in sensor)					2140.50 (14 in sensor)
	7.64 in (194 mm) (24 in sensor)					2140.80 (24 in sensor)
10, 14 & 24 in Sensor 						
AC/DC Current Probe Model MR193-BK 	1.6 in (41 mm)	± 2.5 %	-0.80 °	(1 to 1000) A _{AC} (1 to 1300) A _{DC}	PEL 112 PEL 113 PEL 115 8333 8336 8436 8345	2140.28
AC Current Probe Model MN93-BK 	0.78 in (20 mm)	± 1 %	0.8 °	(0.5 to 240) A _{AC}	PEL 52 PEL 112 PEL 113 PEL 115 8333 8336 8436 8345	2140.32
AC Current Probe Model SR193-BK 	2.05 in (52 mm)	± 0.3 %	0.2 °	(1 to 1200) A _{AC}	PEL 52 PEL 112 PEL 113 PEL 115 8333 8336 8436 8345	2140.33
AmpFlex® Sensor 24 in Model 193-24-BK* 	7.64 in (194 mm) (24 in sensor)	± 1 %	0.5 °	100 mA to 12,000 A _{AC} ⁽¹⁾	PEL 52 PEL 112 PEL 113 PEL 115 8333 8336 8436 8345	2140.34
AmpFlex® Sensor 36 in Model 193-36-BK* 	11.64 in (291 mm) (36 in sensor)	± 1 %	0.5 °	100 mA to 12,000 A _{AC} ⁽¹⁾	PEL 52 PEL 112 PEL 113 PEL 115 8333 8336 8436 8345	2140.35

POWER QUALITY / ENERGY ANALYZERS, METERS & LOGGERS OPTIONAL ACCESSORIES

MODEL	MAX CONDUCTOR SIZE	ACCURACY (TYPICAL)	TYPICAL ERROR ON Φ AT (50 / 60) HZ	CURRENT RANGE		USED WITH MODEL	CAT. #
AC Current Probe Model MN193-BK 	0.78 in (20 mm)	$\pm 1\%$	0.75 °	100 A	200 mA to 120 Aac	PEL 52 PEL 112 PEL 113 PEL 115 8333 8336 8436 8345	2140.36
			1.7 °	5 A	5 mA to 6 Aac		
AmpFlex® Sensor 24 in Model 196A-24-BK* (Waterproof IP67) 	7.64 in (194 mm) (24 in sensor)	$\pm 1\%$	0 °	100 mA to 12,000 Aac ⁽¹⁾		PEL 115 8436	2140.75
MiniFlex® Sensor 14 in Model MA196-14-BK* (Waterproof IP67) 	3.9 in (99 mm) (14 in sensor)	$\pm 1\%$	0 °	100 mA to 12,000 Aac ⁽¹⁾		PEL 115 8436	2140.79
AC Current Probe Model MN94 	0.25 in (7 mm)	$\pm 0.2\%$	0.1 °	50 mA to 200 Aac		PEL 52 PEL 112 PEL 113 PEL 115 8345	2140.81
AC / DC Current Probe Model E94 	.464 in (11.8 mm)	$\pm 3\%$	1.5 °	10 A	100 mA to 10 Aac	PEL 112 PEL 113 PEL 115 8345	2140.82
		$\pm 4\%$	1 °	100 A	500 mA to 100 Aac		

* Maximum current reduced by a factor of 2 for 400 Hz fundamental frequency.

All current sensors can be used with Models PEL 115 and 8436. However, only the MA196-14-BK and 196A-24-BK flexible sensors are waterproof.

(1) Current range may be limited by sensor size or meter type.

Consult factory for NIST Calibration prices.

POWER QUALITY / ENERGY ANALYZERS, METERS & LOGGERS SELECTION CHART

MODEL	CAT. #	INPUT TERMINALS	CHANNELS	RMS VOLTAGE MAX PHASE-TO- NEUTRAL	RMS VOLTAGE MAX PHASE-TO- PHASE	PEAK VOLTAGE MAX PHASE-TO- NEUTRAL	PEAK VOLTAGE MAX PHASE-TO- PHASE	DC VOLTAGE MAX	AC CURRENT MAX (PROBE DEPENDENT)	DC CURRENT MAX (PROBE DEPENDENT)	RATIOS VOLT	RATIOS AMPERE
8333	2136.10	4 V / 3 I	3 V / 4 I	1000 V _{RMS}	2000 V _{RMS}	1414 V _{pk}	2828 V _{pk}	1200 V _{DC}	10,000 A _{AC}	1300 A _{DC}		Yes
8336	2136.30	5 V / 4 I	4 V / 4 I	1000 V _{RMS}	2000 V _{RMS}	1414 V _{pk}	2828 V _{pk}	1200 V _{DC}	10,000 A _{AC}	5000 A _{DC}		Yes
8345	2136.35	5 V / 4 I	4 V / 4 I	1000 V _{RMS}	2000 V _{RMS}	1414 V _{pk}	2828 V _{pk}	1200 V _{DC}	10,000 A _{AC}	5000 A _{DC}		Yes
8436	2136.43	5 V / 4 I	4 V / 4 I	1000 V _{RMS}	2000 V _{RMS}	1414 V _{pk}	2828 V _{pk}	1200 V _{DC}	10,000 A _{AC}	5000 A _{DC}		Yes
PEL 52	2137.71	2 V / 2 I		600 V _{RMS}	1200 V _{RMS}	—			3600 A _{AC}	—	No	Yes
PEL 112	2137.63	4 V / 3 I	3 V / 3 I	1000 V _{RMS}	1700 V _{RMS}	1414 V _{pk}	2400 V _{pk}	1000 V _{DC}	12,000 A _{AC}	5000 A _{DC}		Yes
PEL 113	2137.64	4 V / 3 I	3 V / 3 I	1000 V _{RMS}	1700 V _{RMS}	1414 V _{pk}	2400 V _{pk}	1000 V _{DC}	12,000 A _{AC}	5000 A _{DC}		Yes
PEL 115	2137.56	5 V / 4 I	4 V / 4 I	1000 V _{RMS}		1414 V _{pk}	2400 V _{pk}	1000 V _{DC}	12,000 A _{AC}	5000 A _{DC}		Yes


MODEL	CAT. #	DISTRIBUTION SYSTEMS	PHASE ROTATION	WAVEFORM MODE	TRANSIENT MODE	TRUE INRUSH [®] MODE / TYPE / DURATION	ALARM MODE	SNAPSHOT MODE	HARMONIC MODE / INTERHARMONIC MODE	TYPE LCD	POWER SOURCE
8333	2136.10	1 P-2 W, 2 P-3 W, 3 P-3 W, 3 P-4 W		Yes		No	10 types / up to 2 active / 4662 recorded	Yes (12)	Yes / No	TFT - 5.7 in diagonal 320 x 240 resolution	External adapter with internal NiMH battery pack
8336	2136.30	1 P-2 W, 1 P-3 W, 2 P-2 W, 2 P-3 W, 2 P-4 W, 3 P-3 W, 3 P-4 W, 3 P-5 W		Yes		Yes (RMS+PEAK & RMS) up to 1 & 10 min	40 types / up to 7 active / 16,362 recorded	Yes (50)	Yes / No	TFT - 5.7 in diagonal 320 x 240 resolution	External adapter with internal NiMH battery pack
8345	2136.35	1 P-2 W, 1 P-3 W, 2 P-2 W, 2 P-3 W, 2 P-4 W, 3 P-3 W, 3 P-4 W, 3 P-5 W		Yes		Yes (RMS+PEAK & RMS) up to 10 & 30 min	40 types / 20,000 w / email notifications	Yes (no limit with SD card)	DC to 127 th order; < 3 % U _{din} / 0 to 62 nd order; < 0.5 % U _{din}	7 in color LCD touch screen: 800 x 480 (WVGA)	External adapter with Li-ion battery pack
8436	2136.43	1 P-2 W, 1 P-3 W, 2 P-2 W, 2 P-3 W, 2 P-4 W, 3 P-3 W, 3 P-4 W, 3 P-5 W		Yes		Yes (RMS+PEAK & RMS) up to 1 & 10 min	40 types / up to 7 active / 16,362 recorded	Yes (50)	Yes / No	TFT - 5.7 in diagonal 320 x 240 resolution	Line Power with internal NiMH battery pack
PEL 52	2137.71	1 P-2 W, 2 P-3 W, 1 P-3 W	Yes			No				Monochrome LCD	Power phase input with internal NiMH battery pack
PEL 112	2137.63	1 P-2 W, 1 P-3 W, 3 P-3 W D2, 3 P-3 W O2, 3 P-3 W Y2, 3 P-3 W D3, 3 P-3 W O3, 3 P-3 W Y, 3P-3 W DB, 3 P-4 W Y, 3 P-4 W YB, 3 P-4 W Y2 1/2, 3 P-4 W D, 3 P-4 WOD, DC-2 W DC-3 W, DC-4 W	Yes			No			Yes / No	None	Line Power with internal NiMH battery pack
PEL 113	2137.64	1 P-2 W, 1 P-3 W, 3 P-3 W D2, 3 P-3 W O2, 3 P-3 W Y2, 3 P-3 W D3, 3 P-3 W O3, 3 P-3 W Y, 3P-3 W DB, 3 P-4 W Y, 3 P-4 W YB, 3 P-4 W Y2 1/2, 3 P-4 W D, 3 P-4 WOD, DC-2 W DC-3 W, DC-4 W	Yes			No			Yes / No	Monochrome LCD	Line Power with internal NiMH battery pack
PEL 115	2137.56	1 P-2 W, 1 P-3 W, 3 P-3 W D2, 3 P-3 W O2, 3 P-3 W Y2, 3 P-3 W D3, 3 P-3 W O3, 3 P-3 W Y, 3P-3 W DB, 3 P-4 W Y, 3 P-4 W YB, 3 P-4 W Y2 1/2, 3 P-4 W D, 3 P-4 WOD, DC-2 W DC-3 W, DC-4 W	Yes			No			Yes / No	Monochrome LCD	Power phase input or external adapter with internal NiMH battery pack

POWER QUALITY / ENERGY ANALYZERS, METERS & LOGGERS

DataView® Data Analysis and Reporting Software

Configure all functions:

- Display and analyze real-time data on your PC
- Configure functions and parameters from your PC
- Customize views, templates and reports to your exact needs
- Create and store a complete library of configurations that can be uploaded as needed
- Zoom in and out and pan through sections of the graph to analyze the data
- Download, display and analyze recorded data
- Display waveforms, trend graphs, harmonic spectrums, text summaries, transients, event logs and stored alarms
- Print reports using standard or custom templates you design
- Free updates available on our website www.aemc.com

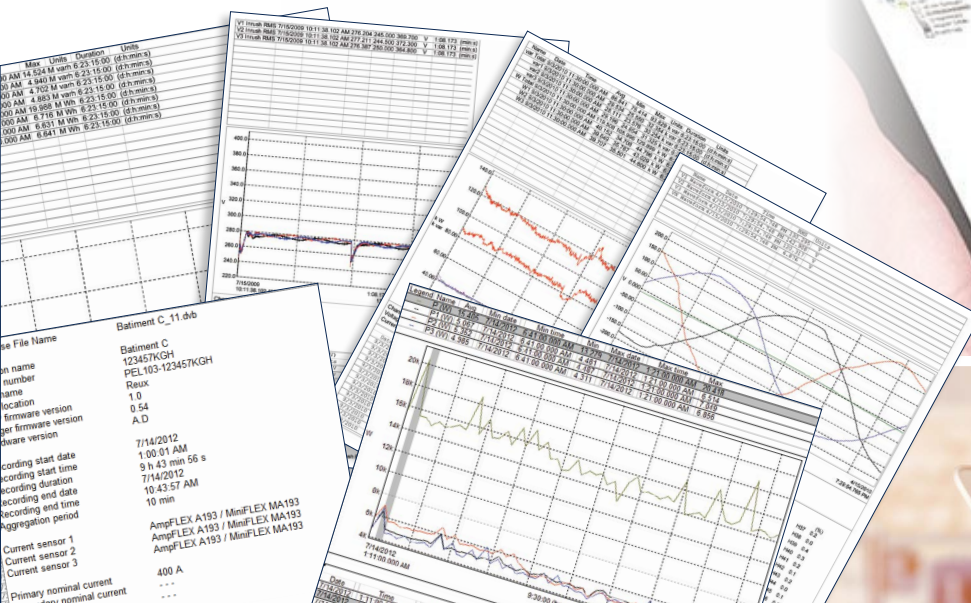

Reports can be displayed on a PC and printed. Each report includes all test results in a tabular and graphic format, as well as operator and test site information. Comments typed by the operator will also be included.




POWER QUALITY / ENERGY ANALYZERS, METERS & LOGGERS


DataView® Data Analysis and Reporting Software




DataView® software, user manual and quick start guide are included in the USB Drive

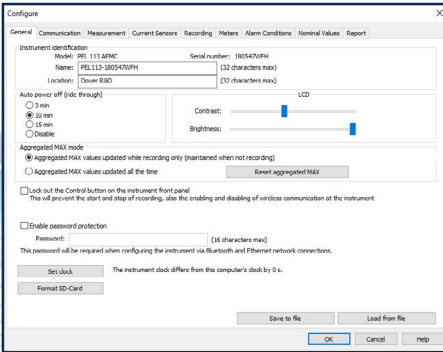

Configure basic information regarding Auto Power OFF, instrument name and location, display contrast and brightness (*Models PEL 113 & PEL 115*), setting of the real-time clock and SD-card formatting is easily accomplished from the General tab.

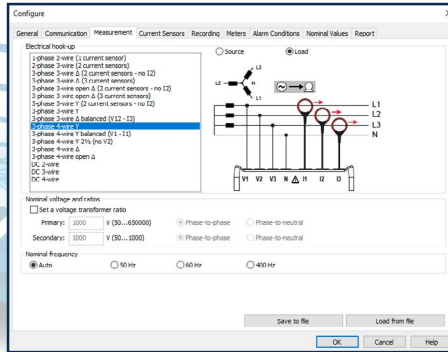

The Measurement tab specifies the electrical distribution system, voltage ratios, and nominal frequency.

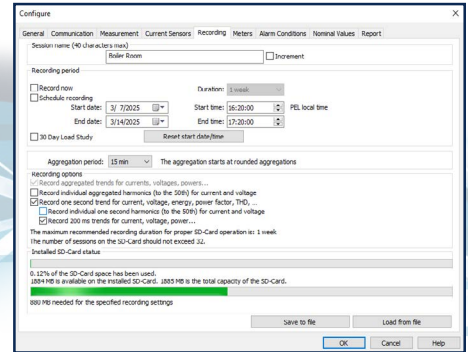


In the Recording tab, configure the instrument to measure (*and record*) over a user selectable recording period. Select demand intervals and view available memory for data storage.

Typical DataView® Functional Digital & Graphical Display

Control Panel Trend View

In the PEL Control Panel you will find all the necessary tools and selection buttons to review recorded data as trend plots or tabular lists.

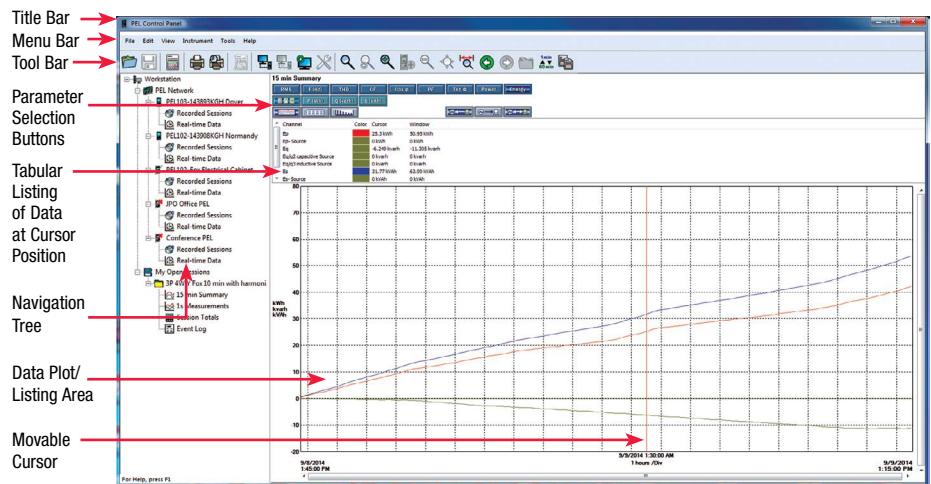

NEW! Effortlessly Perform Load Study Analysis Meeting the NEC 220.87 Requirements with the PEL DataView® Control Panel Feature