



Features:

- Ultra Wide Input 8 : 1 voltage range
- Package type: SIP 8
- Continuous output power: 3W
- Protection: Voltage and current protection
- Operating ambient temperature range: -40 to +105°C
- High efficiency, typically 82%
- I/O isolation test voltage: 3k VDC
- Output voltage: 3.3V to 36V / $\pm 3.3V$
 $\pm 5V, \pm 9V, \pm 12V, \pm 15V, \pm 24V$
- IEC/EN/UL62368-1



Description

VTX-315-003-#### are miniature, isolated 3W DC/DC converters in a SIP8 package. They offer the ideal solution in many space critical applications for board level power distribution. The Internal SMD construction makes it possible to offer a product with high performance at low cost. The series offers smaller size, improved efficiency and 3KVDC isolation, and there is no need for a heat sink.

These products are widely used in applications such as industrial control, instrumentation, test and measurement systems, pure digital circuits, low frequency analog circuits, relay-driven circuits and data switching circuits.

Selection Guide

Part Number	Input Voltage VDC (Range)	Output Voltage (VDC)	Output Current Max (mA)	Full Load Efficiency (%) Typical	Capacitive Load (uF) Max
VTX-315-003-1203	12 (4.5 - 36)	3.3	758	79	1200
VTX-315-003-1205		5	600	81	1000
VTX-315-003-1206		6	500	81	820
VTX-315-003-1209		9	333	82	470
VTX-315-003-1212		12	250	82	330
VTX-315-003-1215		15	200	82	220
VTX-315-003-1218		18	167	82	180
VTX-315-003-1224		24	125	82	180
VTX-315-003-1228		28	107	82	150
VTX-315-003-1203D		± 3.3	± 379	80	560
VTX-315-003-1205D		± 5	± 300	81	470
VTX-315-003-1209D		± 9	± 167	82	330
VTX-3153-003-1212D		± 12	± 125	82	220
VTX-315-003-1215D		± 15	± 100	82	150
VTX-315-003-1224D		± 24	± 63	82	120

Please contact Vigortronix for any enquiries. Products can be altered to suit custom requirements.
The information contained in this document is subject to change without notice.

Vigortronix, 16 De Havilland Way, Witney, Oxfordshire, OX29 0YG, UK
Tel. +44 (0)1993 777570 Web. www.vigortronix.com, E-mail: sales@vigortronix.com
Vigortronix is a trading name of Vigortronix Limited

Vigortronix.com

Input Specification						
Item	Conditions		Min	Typical	Max	Unit
Reflected Ripple Current			-	50	-	mA
Surge Voltage	VDC input (1 sec max)		-0.7	-	50	VDC
Starting Voltage				-	4.5	
Input Under-Voltage Protection			3	3.5	-	
Single Output Input Current	Nominal Input	3.3VDC Output	-	264/5	271/10	mA
		Other Output	-	309/20	316/35	
Dual Output Input Current	Nominal Input	3.3VDC Output	-	261/8	121/40	
		Other Output	-	309/25	316/40	
Ctrl	Turn on module		Ctrl pin open or pulled high (TTL2.7-12VDC)			
	Turn off module		Ctrl pin pulled low to GND (0-1.2VDC)			
Input Filter			Capacitance Filter			

Output Specification						
Item	Conditions		Min	Typical	Max	Unit
Voltage Accuracy Single Output	0% - 100% Load		-	±1.0	±3.0	%
Voltage Accuracy Dual Output	Vo1	0% - 100% Load	-	±1.0	±3.0	
	Vo2	0% - 100% Load	-	±3.0	±5.0	
Line Regulation Single Output	Vin=Min to Max @ Full Load		-	±0.5	±1.0	
Line Regulation Dual Output	Vo1	Vin=Min to Max @ Full Load	-	±0.5	±1.0	
	Vo2	Vin=Min to Max @ Full Load	-	±1.0	±2.0	
Load Regulation	5%-100% Load		-	±1.0	±2.0	
	0%-5% Load		-	±2.0	±4.0	
Ripple / Noise*	20MHz bandwidth		-	60	100	mVp-p
Temp. Coefficient	100% Load		-	±0.03	-	%/°C
Over current Protection	Nominal Input Voltage		110	-	-	%Io
Short Circuit Protection			Continuous, Self-recovery			
Transient Recovery Time	25% Load step change, nominal input voltage		-	300	500	µs
Transient Response Deviation	3.3V/5V/6V		-	±5.0	±8.0	%
	Other Output		-	±3.0	±5.0	
The “parallel cable” method is used for Ripple and Noise test.						

Please contact Vigortronix for any enquiries. Products can be altered to suit custom requirements.
The information contained in this document is subject to change without notice.

General Specification					
Item	Conditions	Min	Typical	Max	Unit
Isolation	Input-output electric strength test for 1 minute with a leakage current of 1mA max	3000	-	-	VDC
Insulation Resistance	Input-output resistance at 500VDC	1000	-	-	MΩ
Isolation Capacitance	Input-output capacitance at 100kHz/0.1V	-	1000	-	pF
Operating Temperature		-40	-	+105	°C
Storage Temperature		-55	-	+125	
Soldering Pin Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds	-	-	+360	
Storage Humidity	Non-condensing	5	-	+95	%RH
Switching Frequency	Full load, nominal input voltage	-	300	-	kHz
Vibration		10-150Hz, 5G, 0.75mm. alongX, YandZ			
MTBF	25°C (MIL-HDBK-217F)	>100,000Hrs			
Dimensions		22.0 x 9.50 x 12.0mm			
Cooling Method		Free Air Convection			
Weight		4.8g (Typ.)			
Case Material	Black plastic; flame-retardant and heat-resistant (UL94 V-0)				

EMC Specification		
Emissions	CE /RE	CISPR32 / EN55032 CLASS B
EMS Immunity	ESD	IEC/EN61000-4-2 Contact ±4kV
	RS	IEC/EN61000-4-3 10V/m
	EFT	IEC/EN61000-4-4 ±2kV
	Surge	IEC/EN61000-4-5 line to line ±2kV
	CS	IEC/EN61000-4-6 3Vr.m.s

Please contact Vigortronix for any enquiries. Products can be altered to suit custom requirements.
The information contained in this document is subject to change without notice.


Vigortronix, 16 De Havilland Way, Witney, Oxfordshire, OX29 0YG, UK
Tel. +44 (0)1993 777570 Web. www.vigortronix.com, E-mail: sales@vigortronix.com
Vigortronix is a trading name of Vigortronix Limited

Vigortronix.com




Performance Graphs


Temperature Derating Graph

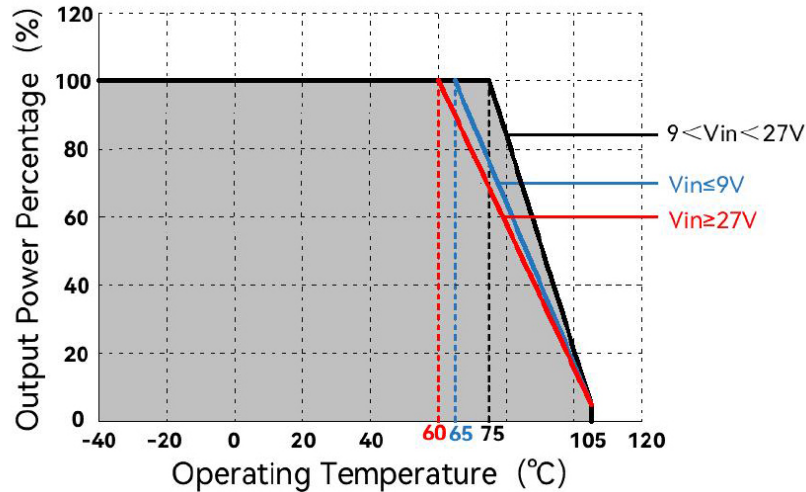

Efficiency Vs Input Voltage Graph

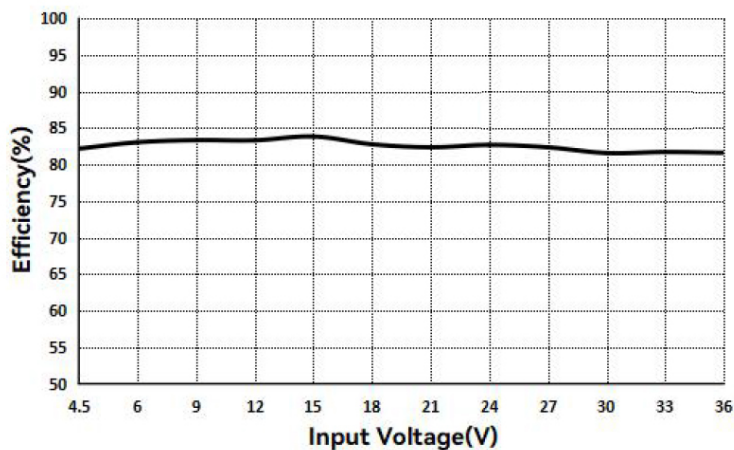


Efficiency Vs Output Load Graph

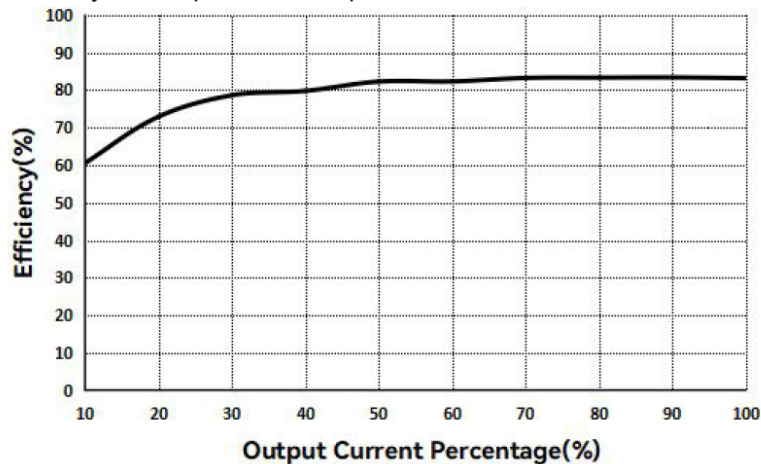

Please contact Vigortronix for any enquiries. Products can be altered to suit custom requirements.
The information contained in this document is subject to change without notice.


Application Schematic for EMC

Typical Application Schematic

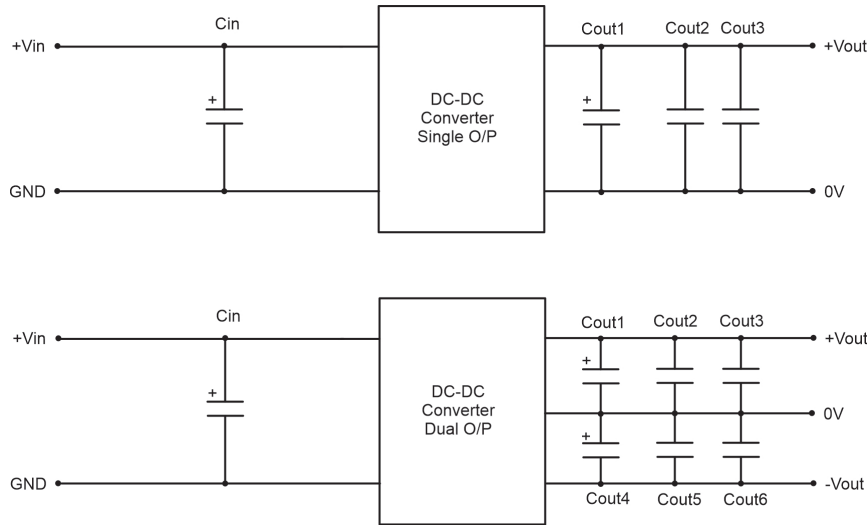

Cin	Single Out	Dual Out	Cout1/Cout4	Cout2/Cout5	Cout3/Cout6
100uF/100V	3.3VDC	±3.3VDC	100uF/16V	10uF/50V	0.1uF/16V
	5VDC	±5VDC	100uF/16V	10uF/50V	0.1uF/16V
	9VDC	±9VDC	100uF/25V	10uF/50V	0.1uF/25V
	12VDC	±12VDC	100uF/25V	10uF/50V	0.1uF/25V
	15VDC	±15VDC	100uF/25V	10uF/50V	0.1uF/25V
	24VDC	±24VDC	100uF/50V	10uF/50V	0.1uF/50V

EMC (CLASS B) Application Schematic


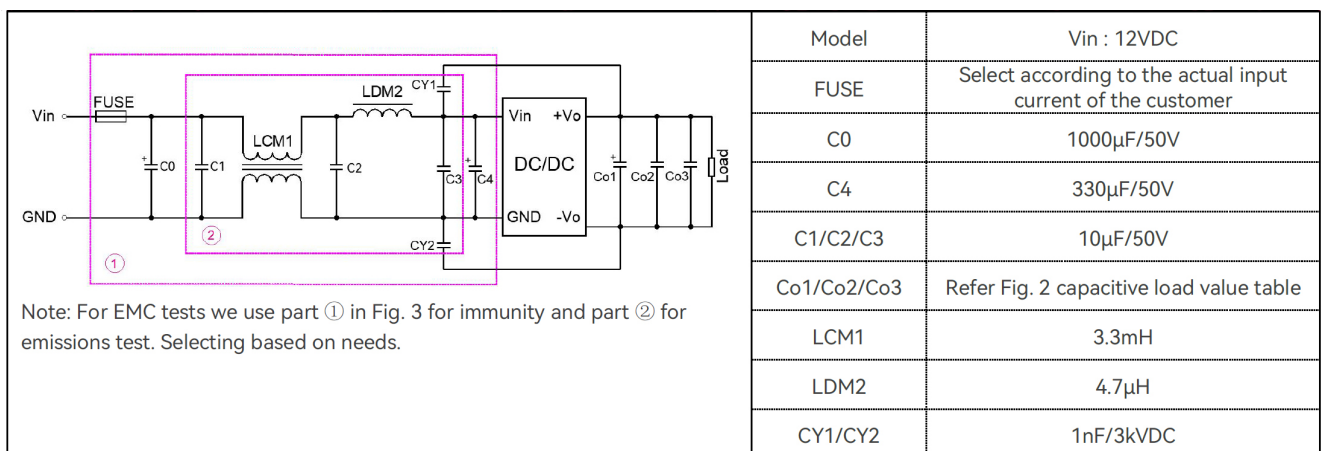


Please contact Vigortronix for any enquiries. Products can be altered to suit custom requirements.
The information contained in this document is subject to change without notice.


Vigortronix, 16 De Havilland Way, Witney, Oxfordshire, OX29 0YG, UK
Tel. +44 (0)1993 777570 Web. www.vigortronix.com, E-mail: sales@vigortronix.com
Vigortronix is a trading name of Vigortronix Limited

Vigortronix.com

Dimensions

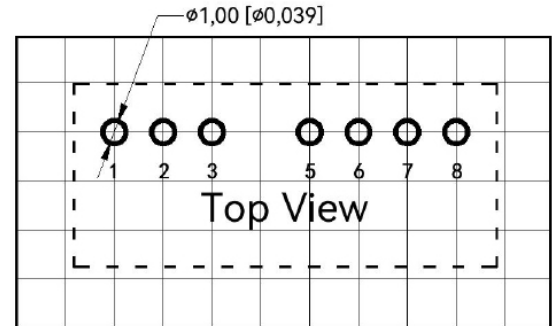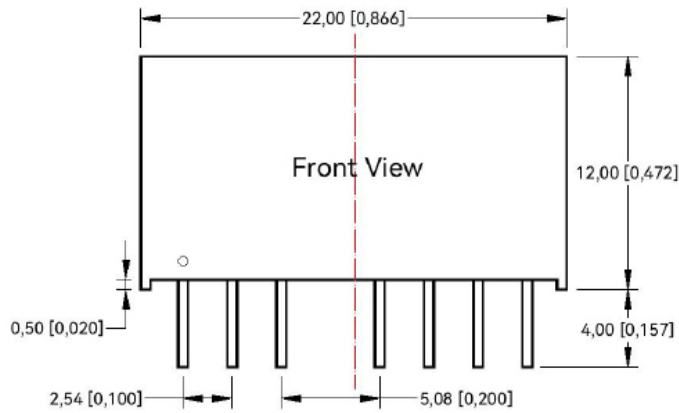

The grid distance is 2.54mm x2.54mm

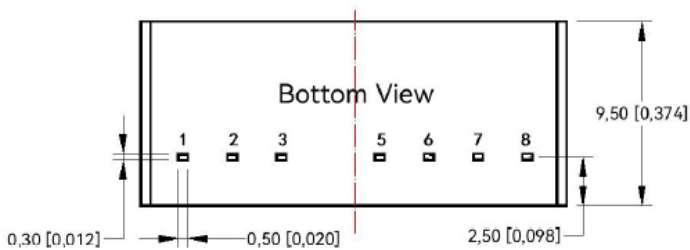

Note:
Unit: mm[inch]

PIN Number	Single	Dual
1	GND	GND
2	Vin	Vin
3	Ctrl	Ctrl
5	NC	NC
6	+Vout	+Vout
7	-Vout	COM
8	NC	-Vout

Note:
Unit: mm [inch]
Pin section tolerances: ± 0.10 [± 0.004]
General tolerances: ± 0.25 [± 0.010]