

ECN/PCN No.: R0524

## For Manufacturer

|                                                      |                                                            |                                                                                                                        |                                                                                   |
|------------------------------------------------------|------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| <b>Product Description:</b><br>2450 MHz Chip Antenna | <b>Abracon Part Number / Part Series:</b><br>ACAG0201-2450 | <input type="checkbox"/> Documentation only<br><input checked="" type="checkbox"/> ECN<br><input type="checkbox"/> EOL | <input type="checkbox"/> Series<br><input type="checkbox"/> Part Number           |
| <b>Affected Revision:</b><br>B                       | <b>New Revision:</b><br>C                                  | <b>Application:</b>                                                                                                    | <input type="checkbox"/> Safety<br><input checked="" type="checkbox"/> Non-Safety |

### Prior to Change:

2450 MHz Chip Antenna

ACAG0201-2450

Request Samples

Check Inventory

2.0 x 1.25 x 0.6 mm  
RoHS/RoHS II Compliant  
MSL Level = 1

Ordering Information

| Part Number       | Description                          |
|-------------------|--------------------------------------|
| ACAG0201-2450     | 2450 MHz Chip Antenna on Cut Tape    |
| ACAG0201-2450-T   | 2450 MHz Chip Antenna on Tape & Reel |
| ACAG0201-2450-EVB | 2450 MHz Chip Antenna Evaluation Kit |

Note: Other options not listed may be available upon request via [Abracon online support](#)


**ABRACON**

12117 Bee Caves Rd, Bldg-3, Suite 200 Bee Cave, TX 78738  
Phone: 512-371-6159 | Fax: 512-351-8858  
For terms and conditions of sales, please visit: [www.abracon.com](http://www.abracon.com)

REVISED: 09-20-25

ABRACON IS  
ISO9001-2015  
CERTIFIED

### After Change:

| 2450 MHz Chip Antenna                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                 |             |             |               |                                   |                 |                                      |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------------|---------------|-----------------------------------|-----------------|--------------------------------------|
| ACAG0201-2450                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | <a href="#">Request Samples</a>  <a href="#">Check Inventory</a>                                                                                                                                                              |             |             |               |                                   |                 |                                      |
| <div> <div>2.0 x 1.25 x 0.6 mm</div> <div>RoHS/RoHS II Compliant</div> <div>MSL Level = 1</div> </div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                 |             |             |               |                                   |                 |                                      |
| <div> <div> <p><b>Description</b></p> <p>This ultra-miniature 2450 MHz chip antenna delivers reliable 2.4 GHz connectivity in a compact 2.0x1.25x0.6 mm SMD package. Featuring 2.1 dBi peak gain with exceptional 68% total efficiency (-1.9 dB) and low return loss (<math>\leq -6</math> dB), it ensures robust wireless performance. Its PCB edge-mount design enables seamless integration into space-constrained devices. This RoHS-compliant, MSL Level 1 antenna is ideal for Bluetooth®, ZigBee, Thread, Matter, and Wi-Fi applications including hearables, wearables, medical telemetry, smart home systems, asset tracking, and intelligent lighting where efficient space utilization is critical.</p> </div> <div>  </div> </div> |                                                                                                                                                                                                                                                                                                                                                                                                 |             |             |               |                                   |                 |                                      |
| <p><b>Features</b></p> <ul style="list-style-type: none"> <li>Miniature Factor: 2.0 x 1.25 x 0.6 mm</li> <li>Low Return Loss of: <math>\leq -6</math> dB</li> <li>Peak Gain: 2.1 dBi</li> <li>Average Total Efficiency: -1.9 dB (68%)</li> <li>Linear Polarization</li> <li>Surface Mount (SMD)</li> <li>Integration: PCB Edge Mounting</li> <li>RoHS Compliant   MSL Level 1</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                        | <p><b>Applications</b></p> <ul style="list-style-type: none"> <li>Bluetooth®/ ZigBee® / Thread/ Matter/Wi-Fi®</li> <li>Bluetooth®/ Wi-Fi® Modules</li> <li>Consumer Hearables &amp; Wearables</li> <li>Medical Wearables &amp; Tele-Medicine</li> <li>Smart Home &amp; Smart Building</li> <li>Asset Tracking &amp; Telematics</li> <li>Smart Metering</li> <li>Intelligent Lighting</li> </ul> |             |             |               |                                   |                 |                                      |
| <p><b>Ordering Information</b></p> <table border="1"> <thead> <tr> <th>Part Number</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>ACAG0201-2450</td> <td>2450 MHz Chip Antenna on Cut Tape</td> </tr> <tr> <td>ACAG0201-2450-T</td> <td>2450 MHz Chip Antenna on Tape &amp; Reel</td> </tr> </tbody> </table> <p>Note: Other options not listed may be available upon request via <a href="#">Abracon online support</a></p>                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                 | Part Number | Description | ACAG0201-2450 | 2450 MHz Chip Antenna on Cut Tape | ACAG0201-2450-T | 2450 MHz Chip Antenna on Tape & Reel |
| Part Number                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Description                                                                                                                                                                                                                                                                                                                                                                                     |             |             |               |                                   |                 |                                      |
| ACAG0201-2450                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 2450 MHz Chip Antenna on Cut Tape                                                                                                                                                                                                                                                                                                                                                               |             |             |               |                                   |                 |                                      |
| ACAG0201-2450-T                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 2450 MHz Chip Antenna on Tape & Reel                                                                                                                                                                                                                                                                                                                                                            |             |             |               |                                   |                 |                                      |
| <div> <div>  <div> 12117 Bee Caves Rd, Bldg-3, Suite 200 Bee<br/> Cave, TX 78739<br/> Phone: 512-371-6159   Fax: 512-351-8858<br/> For terms and conditions of sales, please visit:<br/> <a href="http://www.abracon.com">www.abracon.com</a> </div> </div> <div>REVISED: 08-12-26</div> <div> ABRACON IS<br/> ISO9001:2015<br/> CERTIFIED </div> </div>                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                 |             |             |               |                                   |                 |                                      |

**Cause/Reason for Change:** Updated ordering information

## Change Plan

**Effective Date:**

08/12/2026

**Additional Remarks:**

**Change Declaration:**

**Issued Date:**

08/12/2026

**Issued By:**

Allan

**Issued Department:**

Engineering

**Approval:**

Saravanan Subramanian  
Engineering Director

**Approval:**

Reuben Quintanilla  
Quality Director

**Approval:**

Ying Huang  
Purchasing Director

## For Abracon EOL only

**Last Time Buy (if applicable):**

**Alternate Part Number / Part Series:**

**Additional Approval:**

**Additional Approval:**

**Additional Approval:**

## Customer Approval (If Applicable)

**Qualification Status:**

☐ Approved ☐ Not accepted

Note: It is considered approved if there is no feedback from the customer 1 month after ECN/PCN is released.

|                              |                                |                                  |  |
|------------------------------|--------------------------------|----------------------------------|--|
| <b>Customer Part Number:</b> |                                | <b>Customer Project:</b>         |  |
| <b>Company Name:</b>         | <b>Company Representative:</b> | <b>Representative Signature:</b> |  |
| <b>Customer Remarks:</b>     |                                |                                  |  |

# 2450 MHz Chip Antenna



ACAG0201-2450

Request Samples



Check Inventory



2.0 x 1.25 x 0.6 mm  
RoHS/RoHS II Compliant  
MSL Level = 1

## Description

This ultra-miniature 2450 MHz chip antenna delivers reliable 2.4 GHz connectivity in a compact 2.0×1.25×0.6 mm SMD package. Featuring 2.1 dBi peak gain with exceptional 68% total efficiency (-1.9 dB) and low return loss ( $\leq -6$  dB), it ensures robust wireless performance. Its PCB edge-mount design enables seamless integration into space-constrained devices. This RoHS-compliant, MSL Level 1 antenna is ideal for Bluetooth®, ZigBee, Thread, Matter, and Wi-Fi applications including hearables, wearables, medical telemetry, smart home systems, asset tracking, and intelligent lighting where efficient space utilization is critical.



## Features

- Miniature Factor: 2.0 x 1.25 x 0.6 mm
- Low Return Loss of:  $\leq -6$  dB
- Peak Gain: 2.1 dBi
- Average Total Efficiency: -1.9 dB (68%)
- Linear Polarization
- Surface Mount (SMD)
- Integration: PCB Edge Mounting
- [RoHS Compliant](#) | [MSL Level 1](#)

## Applications

- Bluetooth®/ ZigBee® / Thread/ Matter/Wi-Fi®
- Bluetooth®/ Wi-Fi® Modules
- Consumer Hearables & Wearables
- Medical Wearables & Tele-Medicine
- Smart Home & Smart Building
- Asset Tracking & Telematics
- Smart Metering
- Intelligent Lighting

## Ordering Information

| Part Number     | Description                          |
|-----------------|--------------------------------------|
| ACAG0201-2450   | 2450 MHz Chip Antenna on Cut Tape    |
| ACAG0201-2450-T | 2450 MHz Chip Antenna on Tape & Reel |

Note: Other options not listed may be available upon request via [Abracon online support](#)



12117 Bee Caves Rd, Bldg-3, Suite 200 Bee  
Cave, TX 78738  
Phone: 512-371-6159 | Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISED: 08-12-26

ABRACON IS  
ISO9001-2015  
CERTIFIED

# 2450 MHz Chip Antenna



ACAG0201-2450

Request Samples



Check Inventory



2.0 x 1.25 x 0.6 mm  
RoHS/RoHS II Compliant  
MSL Level = 1

## Electrical Specification

| Parameter                | Specification    | Unit     |
|--------------------------|------------------|----------|
| Operating Frequency      | 2400 - 2500      | MHz      |
| VSWR (Typ.)              | < 3.0            | -        |
| Peak Gain                | 2.1              | dBi      |
| Average Gain             | -1.9             | dBi      |
| Maximum Total Efficiency | 68               | %        |
| Average Total Efficiency | 60.7             | %        |
| Polarization             | Linear           | -        |
| Impedance                | 50               | $\Omega$ |
| Radiation Pattern        | Omni-directional | -        |
| Input Power              | $\leq 2.0$       | W        |

Note: All measurements were conducted on the evaluation board in free space. Performance will vary depending on the ground plane, application, and environment.

## Mechanical Specification

| Parameter                  | Specification       |
|----------------------------|---------------------|
| Antenna Dimension          | 2.0 x 1.25 x 0.6 mm |
| Evaluation Board Dimension | 90 x 50 mm          |
| Mounting Type              | Surface Mount       |
| Mounting Location          | PCB Edge Mounting   |
| Material(s)                | Ceramic             |

## Environmental Specification

| Parameters            | Specifications |
|-----------------------|----------------|
| Operating Temperature | -40°C ~ +85°C  |
| Storage Temperature   | -40°C ~ +85°C  |
| Humidity              | 10% - 70% R.H. |
| MSL level             | 1              |
| RoHS Compliant        | Yes            |



12117 Bee Caves Rd, Bldg-3, Suite 200 Bee  
Cave, TX 78738  
Phone: 512-371-6159 | Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISED: 08-12-26

ABRACON IS  
ISO9001-2015  
CERTIFIED

# 2450 MHz Chip Antenna



ACAG0201-2450

Request Samples




Check Inventory



2.0 x 1.25 x 0.6 mm  
RoHS/RoHS II Compliant  
MSL Level = 1

## Product Dimensions

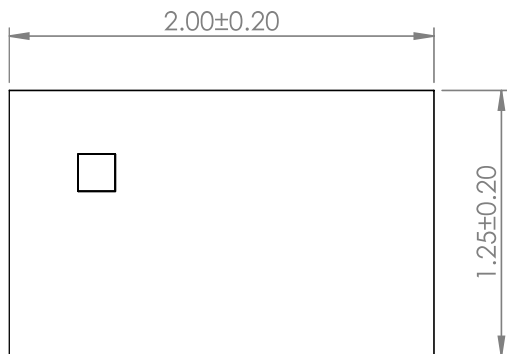


**TOP VIEW**




**SIDE VIEW**

| Pin # | Function |
|-------|----------|
| 1     | INPUT    |
| 2     | GND      |

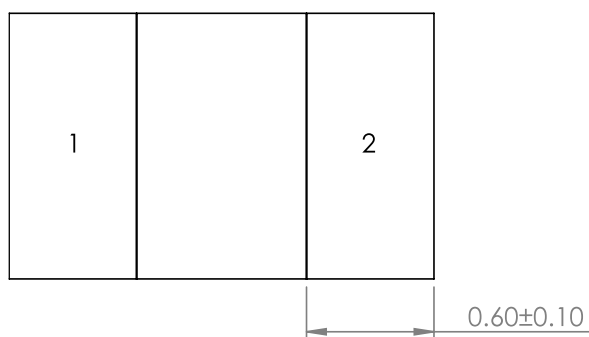

**BOTTOM VIEW**

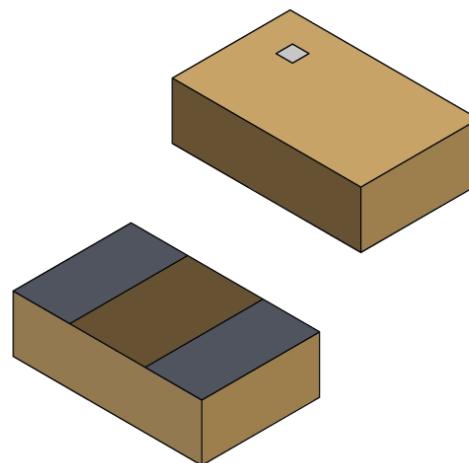

Unit: mm

# 2450 MHz Chip Antenna



ACAG0201-2450

Request Samples




Check Inventory



2.0 x 1.25 x 0.6 mm  
RoHS/RoHS II Compliant  
MSL Level = 1

## Recommended Land Pattern

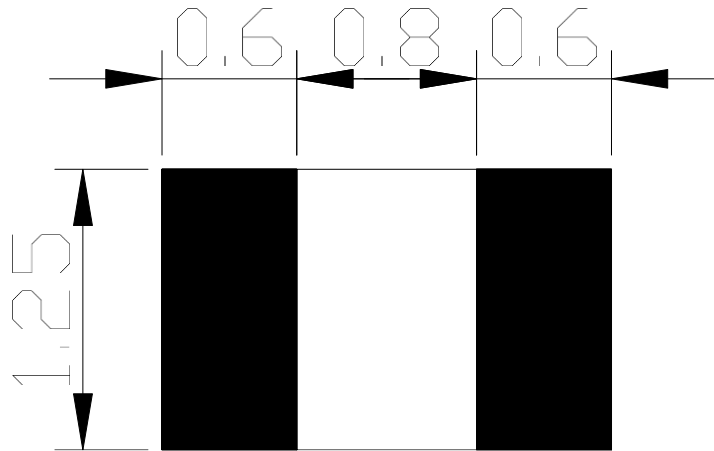

Unit: mm

Please note: The line width should be designed to achieve a 50-ohm characteristic impedance, depending on the PCB material and thickness. For detailed reference layout information, please contact [Abracon online support](#) for assistance.

# 2450 MHz Chip Antenna



ACAG0201-2450

Request Samples




Check Inventory




2.0 x 1.25 x 0.6 mm  
RoHS/RoHS II Compliant  
MSL Level = 1

## Recommended PCB layout

If there are several layers in the PCB, there is an advantage to add vias for smooth interconnection of the ground areas to avoid splits in the ground plane. It is also important that ground clearance is respected through all layers of the PCB. It is recommended to implement a matching network to optimize the antenna impedance in your application.

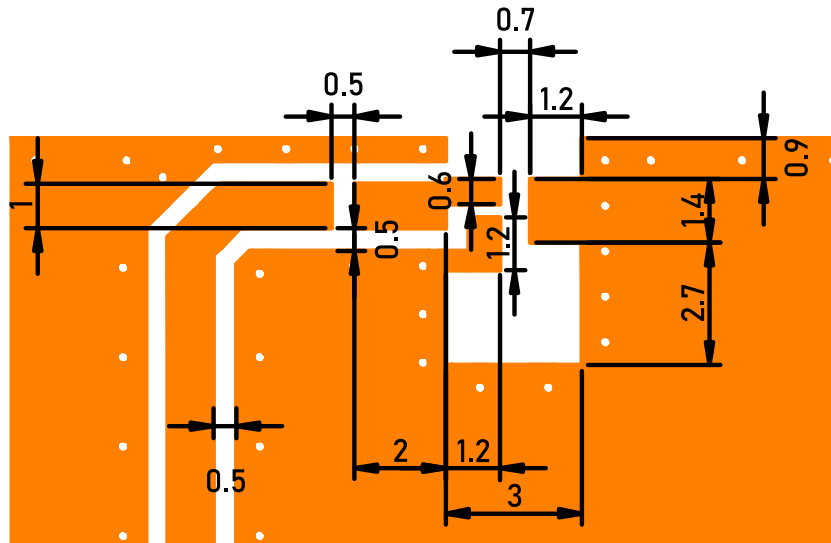

PCB Layout Dimensions

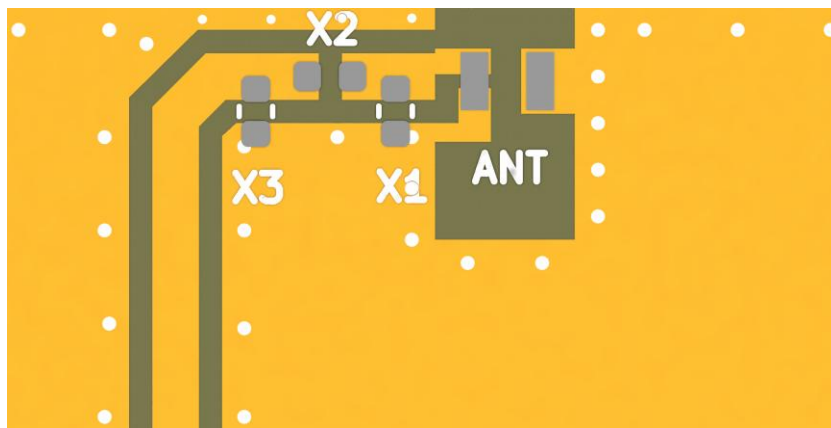

Components Placement

Unit: mm

## Transmission Line

The transmission line should be kept as short as possible and be designed to have a characteristic impedance of 50Ω. Abracon recommends using a Co-Planar Waveguide with Ground (CPWG), which dimensions can be derived by any trusted calculator, using the correct input for PCB materials and layer stack-up.



12117 Bee Caves Rd, Bldg-3, Suite 200 Bee  
Cave, TX 78738  
Phone: 512-371-6159 | Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISED: 08-12-26

ABRACON IS  
ISO9001-2015  
CERTIFIED

# 2450 MHz Chip Antenna



ACAG0201-2450

Request Samples




Check Inventory



2.0 x 1.25 x 0.6 mm  
RoHS/RoHS II Compliant  
MSL Level = 1

## Measurement Setup

The radiation measurements were all done in an anechoic chamber with the antenna implemented on its evaluation board (ACAG0201-2450-EVB) that has a PCB size of 90 x 50 mm:

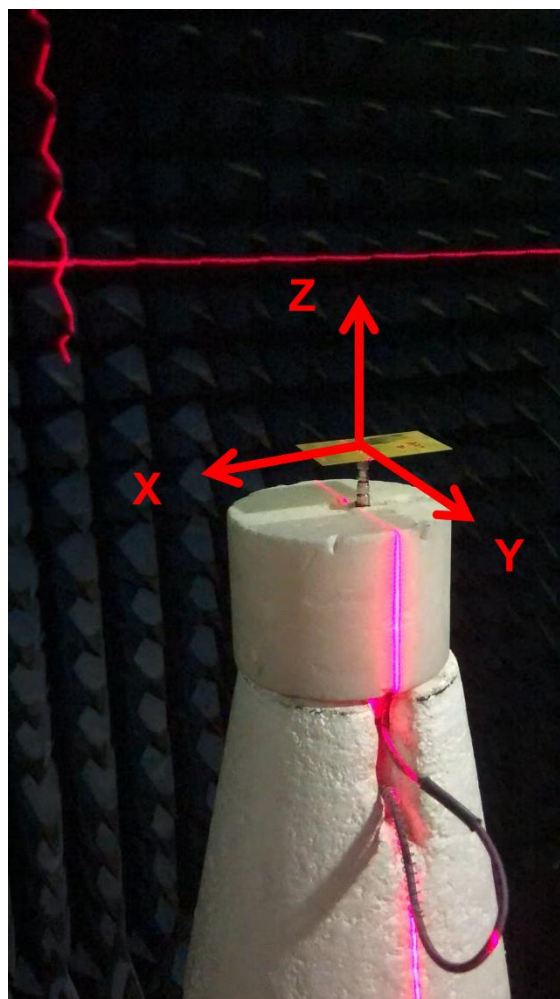

# 2450 MHz Chip Antenna



ACAG0201-2450

Request Samples





Check Inventory



2.0 x 1.25 x 0.6 mm  
RoHS/RoHS II Compliant  
MSL Level = 1

## Reflection Characteristics –Return Loss & VSWR

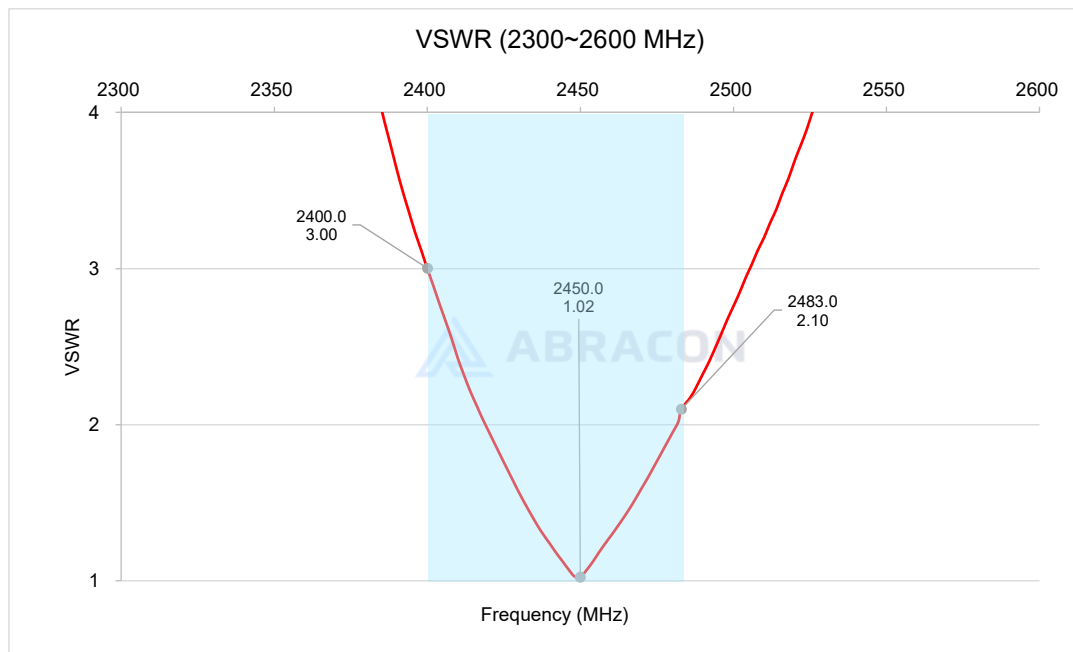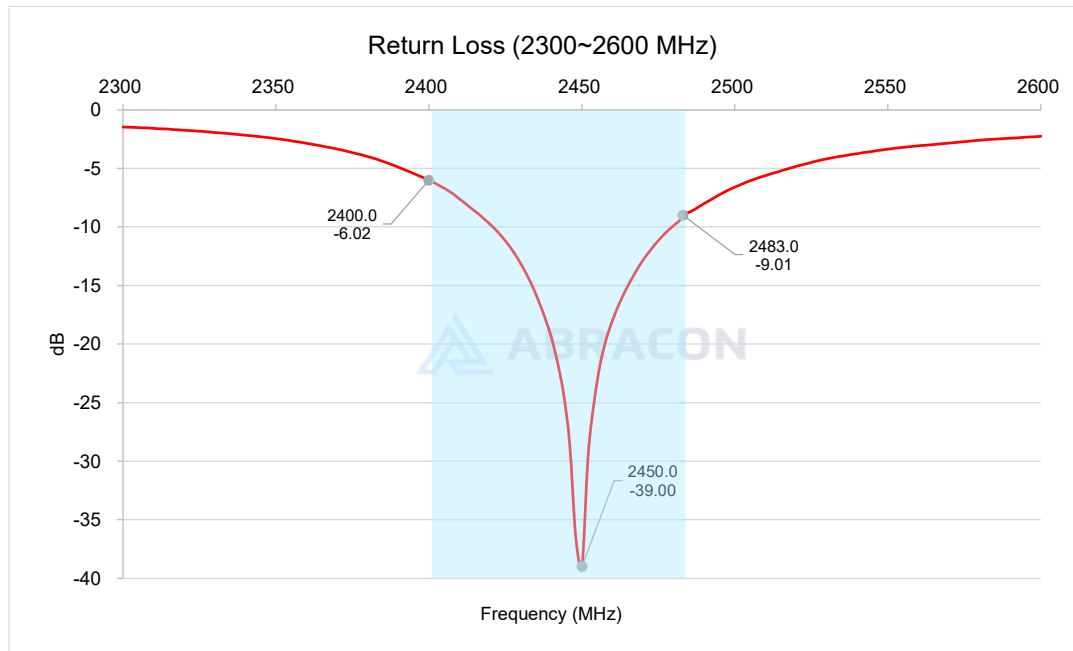

12117 Bee Caves Rd, Bldg-3, Suite 200 Bee  
Cave, TX 78738  
Phone: 512-371-6159 | Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISED: 08-12-26

ABRACON IS  
ISO9001-2015  
CERTIFIED

# 2450 MHz Chip Antenna



ACAG0201-2450

Request Samples





Check Inventory



2.0 x 1.25 x 0.6 mm  
RoHS/RoHS II Compliant  
MSL Level = 1

## Radiation Characteristics –Gain

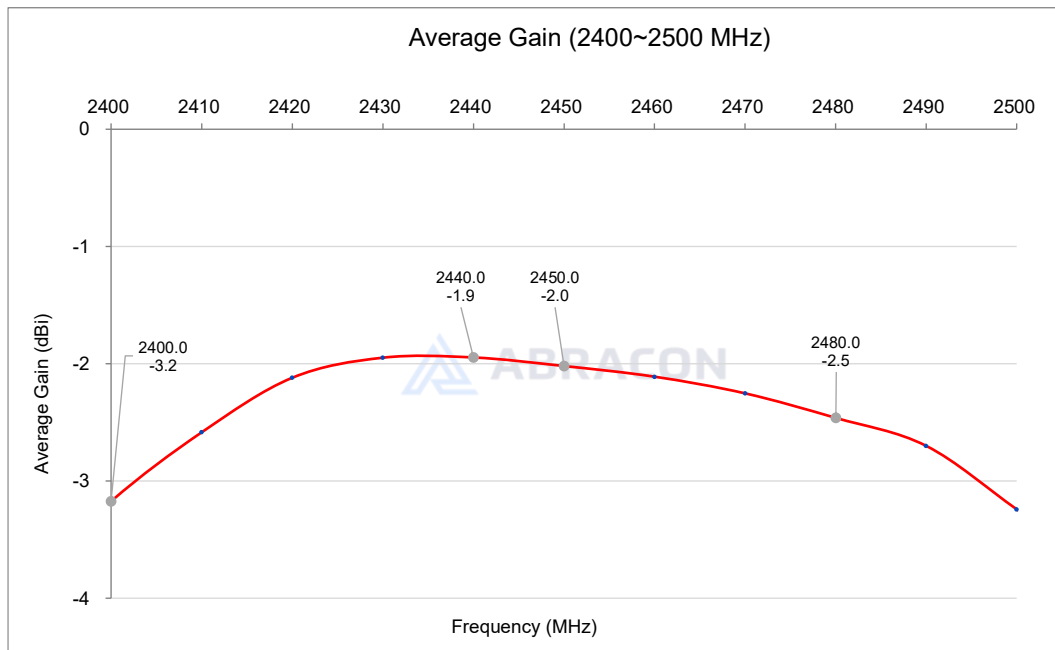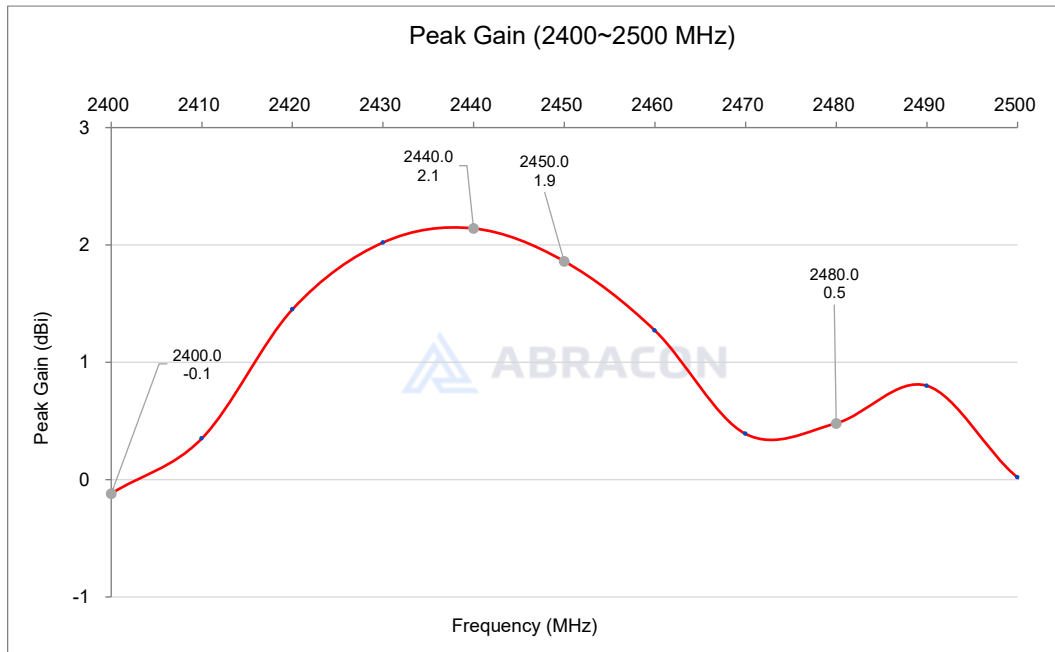

12117 Bee Caves Rd, Bldg-3, Suite 200 Bee  
Cave, TX 78738  
Phone: 512-371-6159 | Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISED: 08-12-26

ABRACON IS  
ISO9001-2015  
CERTIFIED

# 2450 MHz Chip Antenna



ACAG0201-2450

Request Samples




Check Inventory



2.0 x 1.25 x 0.6 mm  
RoHS/RoHS II Compliant  
MSL Level = 1

## Radiation Characteristics – Total Efficiency

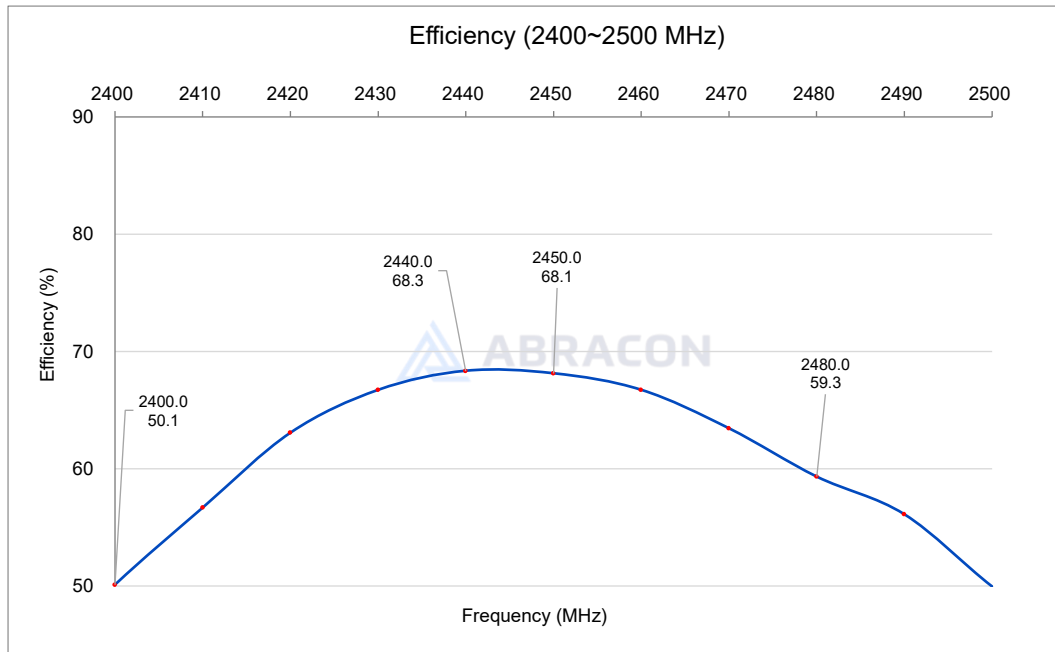

12117 Bee Caves Rd, Bldg-3, Suite 200 Bee  
Cave, TX 78738  
Phone: 512-371-6159 | Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISED: 08-12-26

ABRACON IS  
ISO9001-2015  
CERTIFIED

# 2450 MHz Chip Antenna



ACAG0201-2450

Request Samples






Check Inventory



2.0 x 1.25 x 0.6 mm  
RoHS/RoHS II Compliant  
MSL Level = 1

## Radiation Characteristics – 3D & 2D pattern

2450 MHz

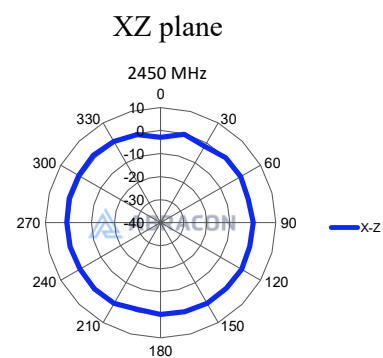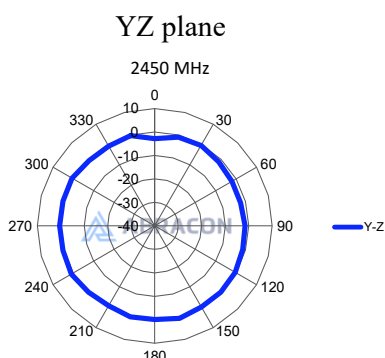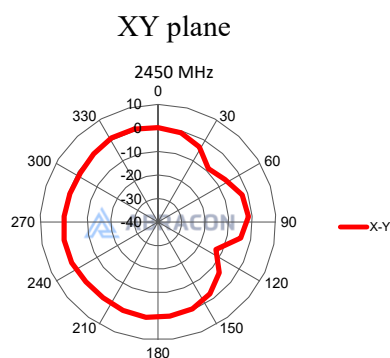

12117 Bee Caves Rd, Bldg-3, Suite 200 Bee  
Cave, TX 78738  
Phone: 512-371-6159 | Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISED: 08-12-26

ABRACON IS  
ISO9001-2015  
CERTIFIED

# 2450 MHz Chip Antenna



ACAG0201-2450

Request Samples




Check Inventory



2.0 x 1.25 x 0.6 mm  
RoHS/RoHS II Compliant  
MSL Level = 1



## Evaluation Board Outline & Matching Circuit

The evaluation board (Abracon ACAG0201-2450-EVB) is developed to simplify antenna testing and evaluation. It has an arbitrary size of 90 x 50 mm and includes an SMA connector. The purpose is to give a reference design for an optimal antenna implementation. The evaluation board can also be used to test other implementations by cutting and soldering the PCB into any device.

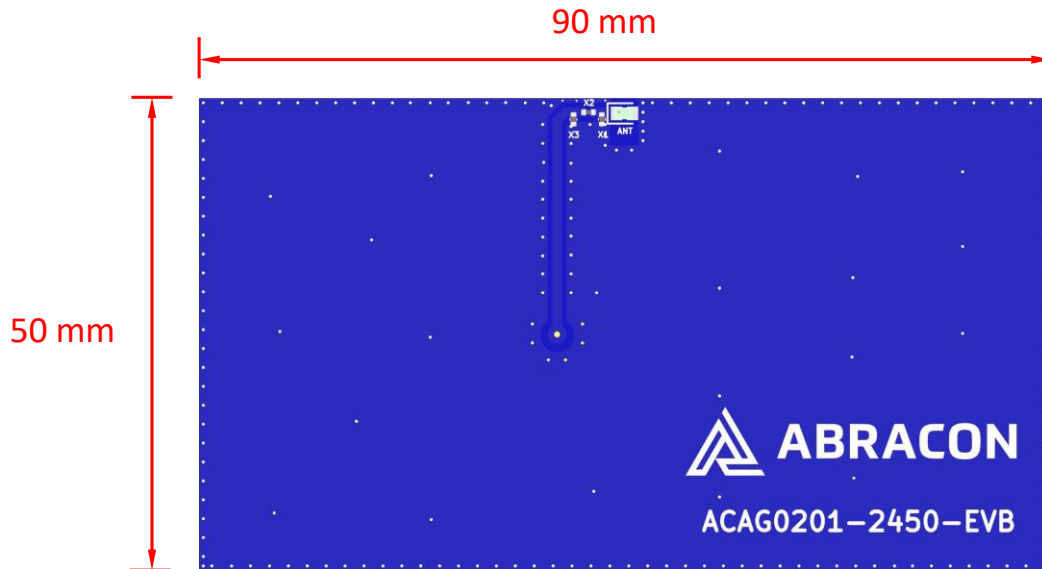

The evaluation board has a matching circuit implemented next to the antenna. This is aimed at enabling optimization possibilities for the user. The component positions are sized for 0402 (1005 metric) SMD components.

The antenna requires a matching circuit to fine-tune the resonant frequency and achieve optimal balance. The evaluation board is pre-tuned for optimal performance in the 2.4–2.5 GHz range using the components listed below (equivalents may be used):

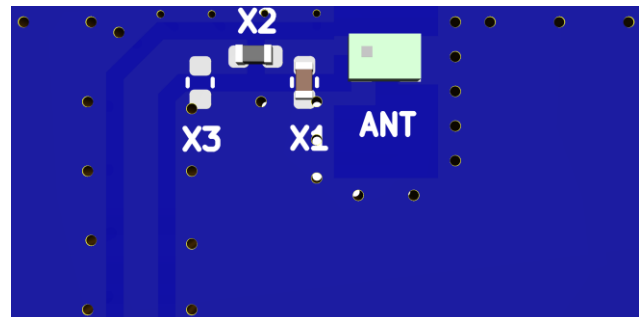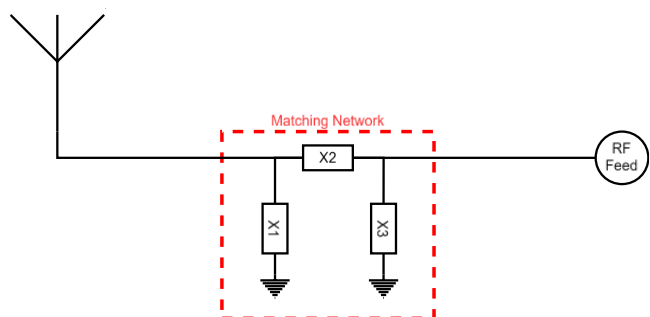

12117 Bee Caves Rd, Bldg-3, Suite 200 Bee  
Cave, TX 78738  
Phone: 512-371-6159 | Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISED: 08-12-26

ABRACON IS  
ISO9001-2015  
CERTIFIED

# 2450 MHz Chip Antenna



ACAG0201-2450

Request Samples



Check Inventory



2.0 x 1.25 x 0.6 mm  
RoHS/RoHS II Compliant  
MSL Level = 1

## Bill of Material

| Component | Description                           | Manufacturer | Manufacturer Part | QTY |
|-----------|---------------------------------------|--------------|-------------------|-----|
| ANT       | 2450 MHz Chip Antenna                 | Abracon      | ACAG0201-2450     | 1   |
| X1        | 0.3 pF Capacitor (0402 / 1005 Metric) | -            | -                 | 1   |
| X2        | 2.4 pF Capacitor (0402 / 1005 Metric) | -            | -                 | 1   |
| X3        | NC                                    | -            | -                 | 0   |

However, it is common that the resonant frequency will shift during implementation in an arbitrary device. Therefore, this matching may be changed with other values/components/brands for compensation of such effects. This is further described in the General Implementation Guidelines section below.



12117 Bee Caves Rd, Bldg-3, Suite 200 Bee  
Cave, TX 78738  
Phone: 512-371-6159 | Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISED: 08-12-26

ABRACON IS  
ISO9001-2015  
CERTIFIED



ACAG0201-2450

Request Samples



Check Inventory




2.0 x 1.25 x 0.6 mm  
RoHS/RoHS II Compliant  
MSL Level = 1

## General Implementation Guidelines

The antenna can be positioned in different ways, although there are some positions which are more beneficial. The illustration below shows a typical PCB with examples on different antenna positions (the GND cutout is not visualized):

- The optimal position is usually option 1. Options 2 and 3 are also possible.
- The antenna must be placed along the PCB edge, i.e., it cannot be placed in the middle (see “N/A”).
- Option 2 or 3 may be the best option for PCB’s much larger than the evaluation board.

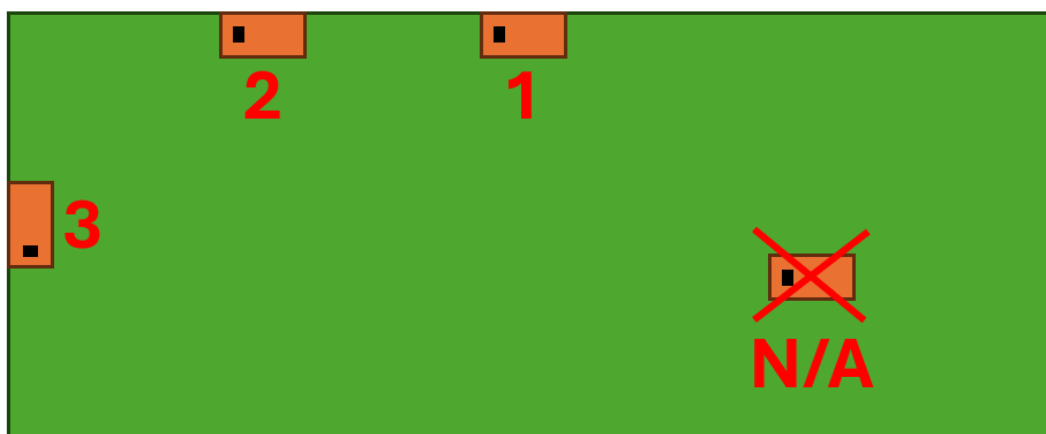

The rectangular copper cutout in the footprint must extend through all layers of the PCB stack-up, ensuring there is **no copper on any layer in this area**. Additionally, a robust via structure around the cutout and along the edge of the ground plane is highly recommended for optimal performance.

It is important to note that plastic and metal parts in close proximity to antennas may significantly affect antenna tuning and performance. For instance, plastic housing above the antenna often causes the resonant frequency to shift downward. Since such effects are challenging to predict without detailed design information, it is recommended to measure the antenna performance in the final device after implementation. To compensate for potential frequency shifts, implementing a matching network on the antenna feed is advisable.

Another general consideration for surface-mounted antennas relates to PCB population. Electrical components placed near the antenna may impact its tuning and radiation performance. To mitigate this, components in the surrounding area should be positioned below a topographical slope. This slope should begin at the PCB level near the antenna's designated keep-out zone and gradually increase in height as distance from the antenna grows.

For technical assistance, please contact [Abracon online support](#) through our online support platform.

# 2450 MHz Chip Antenna



ACAG0201-2450

Request Samples



Check Inventory



2.0 x 1.25 x 0.6 mm  
RoHS/RoHS II Compliant  
MSL Level = 1

## Reflow Profile [JEDEC J-STD-020]

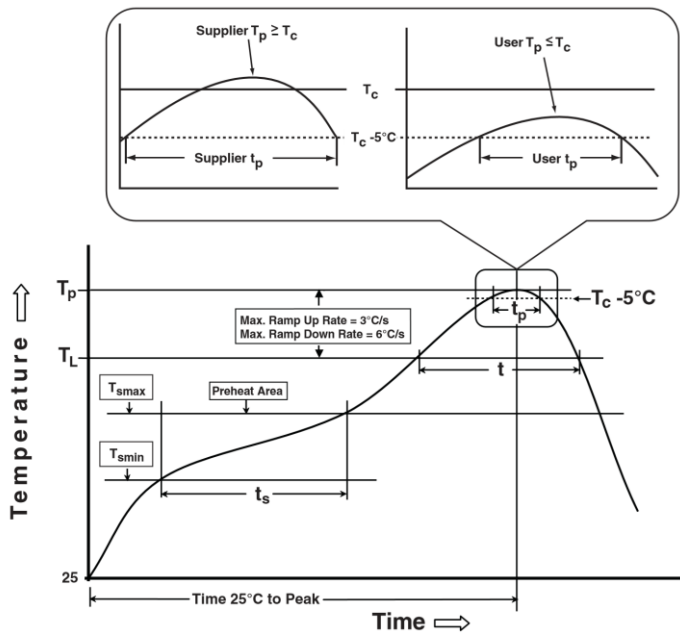


Table 1

| SnPb Eutectic Process<br>Classification Temperatures ( $T_c$ ) |                             |                             |
|----------------------------------------------------------------|-----------------------------|-----------------------------|
| Package Thickness                                              | Volume mm <sup>3</sup> <350 | Volume mm <sup>3</sup> ≥350 |
| <2.5mm                                                         | 235°C                       | 220°C                       |
| ≥2.5mm                                                         | 220°C                       | 220°C                       |

Table 2

| Pb-Free Process<br>Classification Temperatures ( $T_c$ ) |                             |                                 |                              |
|----------------------------------------------------------|-----------------------------|---------------------------------|------------------------------|
| Package Thickness                                        | Volume mm <sup>3</sup> <350 | Volume mm <sup>3</sup> 350-2000 | Volume mm <sup>3</sup> >2000 |
| <1.6mm                                                   | 265°C                       | 265°C                           | 265°C                        |
| 1.6mm - 2.5mm                                            | 260°C                       | 250°C                           | 245°C                        |
| >2.5mm                                                   | 250°C                       | 245°C                           | 245°C                        |

| Profile Feature                                                                   | Sn-Pb Eutectic Assembly | Pb-Free Assembly |
|-----------------------------------------------------------------------------------|-------------------------|------------------|
| Preheat / soak                                                                    |                         |                  |
| Temperature minimum ( $T_{smin}$ )                                                | 100°C                   | 150°C            |
| Temperature maximum ( $T_{smax}$ )                                                | 150°C                   | 180°C            |
| Time ( $T_{smin}$ to $T_{smax}$ ) ( $t_s$ )                                       | 60 – 120 sec.           | 60 – 120 sec.    |
| Average ramp-up rate ( $T_{smax}$ to $T_p$ )                                      | 3°C/sec. max            | 3°C/sec. max     |
| Liquidous temperature ( $T_L$ )                                                   | 183°C                   | 220°C            |
| Time at Liquidous ( $T_L$ )                                                       | 60 – 150 sec.           | 30 – 40 sec.     |
| Peak package body temperature ( $T_p$ )*                                          | See Table 1             | See Table 2      |
| Time ( $T_p$ )** within 5°C of the specified classification temperature ( $T_c$ ) | 20 sec.                 | 5 sec.           |
| Ramp-down rate ( $T_p$ to $T_{smax}$ )                                            | 6°C/sec. max            | 3°C/sec. max     |
| Time 25°C to peak temperature                                                     | 6 min. max              | 8 min. max       |
| Reflow cycles                                                                     | 2 max                   | 2 max            |

\*Tolerance for peak profile temperature ( $T_p$ ) is defined as a supplier minimum and a user maximum.

\*\*Tolerance for time at peak profile temperature ( $t_p$ ) is defined as a supplier minimum and a user maximum.



12117 Bee Caves Rd, Bldg-3, Suite 200 Bee  
Cave, TX 78738  
Phone: 512-371-6159 | Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
www.abracon.com

REVISED: 08-12-26

ABRACON IS  
ISO9001-2015  
CERTIFIED

# 2450 MHz Chip Antenna



ACAG0201-2450

Request Samples




Check Inventory



2.0 x 1.25 x 0.6 mm  
RoHS/RoHS II Compliant  
MSL Level = 1

## Packaging

### Tape & Reel Dimension

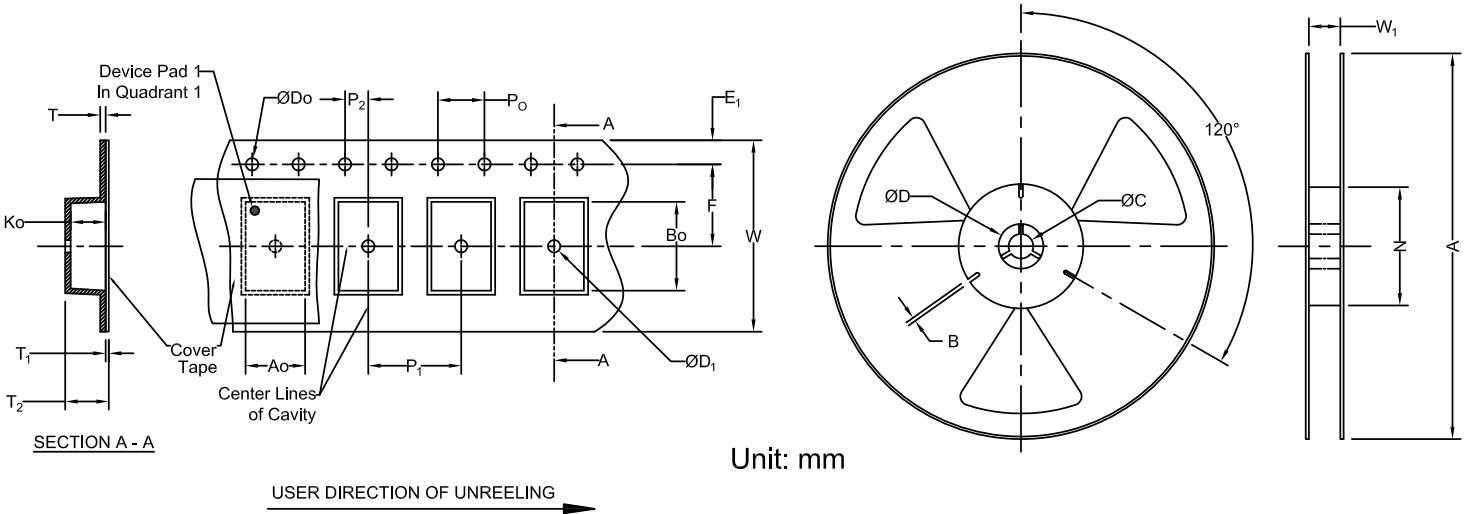

Carrier Tape Specifications (mm)

| Do         | K <sub>0</sub> | E <sub>1</sub> | P <sub>0</sub> | P <sub>2</sub> | T           | F          | P <sub>1</sub> | W          | A <sub>0</sub> | B <sub>0</sub> | Reel Qty |
|------------|----------------|----------------|----------------|----------------|-------------|------------|----------------|------------|----------------|----------------|----------|
| 1.50 ± 0.1 | 1.25 ± 0.1     | 1.75 ± 0.1     | 4.0 ± 0.1      | 2.0 ± 0.10     | 0.22 ± 0.05 | 3.5 ± 0.10 | 4.0 ± 0.1      | 8.0 ± 0.10 | 1.6 ± 0.1      | 2.3 ± 0.1      | 4,000    |

Reel Specifications (mm)

| A         | W <sub>1</sub> | N  | C        |
|-----------|----------------|----|----------|
| 178 ± 2.0 | 8.5 ± 1.0      | 60 | 13 ± 0.5 |

**ATTENTION:** Abracon LLC's products are Commercial-Off-The-Shelf ('COTS'), which are designed, intended, and validated for use in commercial, industrial, and automotive applications. The customer is responsible for testing and verifying the performance of an Abracon solution to meet their system-level requirements.



12117 Bee Caves Rd, Bldg-3, Suite 200 Bee  
Cave, TX 78738  
Phone: 512-371-6159 | Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISED: 08-12-26

ABRACON IS  
ISO9001-2015  
CERTIFIED

| Brand   | Affected PN     | Discontinued/EOL PN | Added PN | Series        | ECO#  | Datasheet Link                                                                                                  | ECN Notification Link                                                                                                                                                                     |
|---------|-----------------|---------------------|----------|---------------|-------|-----------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Abracon | ACAG0201-2450   |                     |          | ACAG0201-2450 | R0524 | <a href="https://abracon.com/datasheets/ACAG0201-2450.pdf">https://abracon.com/datasheets/ACAG0201-2450.pdf</a> | <a href="https://abracon.com/downloads/ECN-PCN/ECN-PCN-Notification_ECOR0524_ACAG0201-2450.pdf">https://abracon.com/downloads/ECN-PCN/ECN-PCN-Notification_ECOR0524_ACAG0201-2450.pdf</a> |
| Abracon | ACAG0201-2450-T |                     |          | ACAG0201-2450 | R0524 | <a href="https://abracon.com/datasheets/ACAG0201-2450.pdf">https://abracon.com/datasheets/ACAG0201-2450.pdf</a> | <a href="https://abracon.com/downloads/ECN-PCN/ECN-PCN-Notification_ECOR0524_ACAG0201-2450.pdf">https://abracon.com/downloads/ECN-PCN/ECN-PCN-Notification_ECOR0524_ACAG0201-2450.pdf</a> |