

quantumdata™ M21 HDMI/DisplayPort Analyzer with HDMI® Video Generator supporting 48Gb/s HDMI and 54Gb/s DisplayPort



Key Features

- **HDMI TMDS, FRL Video Generator** for testing Ultra High Definition TVs supporting 8K resolutions at 48Gb/s link rates with Display Stream Compression (DSC)
- **HDMI TMDS and FRL Video Analyzer** operating up to 48Gb/s (12Gb/s / Lane) with support for Display Stream Compression (DSC)
- **DisplayPort HBR and UHBR Video Analyzer** for testing source devices operating up to 54Gb/s (13.5Gb/s lane rates) with support for Display Stream Compression (DSC)
- **Video analysis** enables viewing the incoming video frames with a status bar showing video timing parameters and essential video parameter values
- **Protocol metadata viewer** to verify main link metadata packets
- **Aux Channel Analyzer (ACA) utility** enables real time monitoring of HDMI DDC and DisplayPort Aux Channel for EDID exchanges, FRL and DisplayPort link training, HDCP authentication (including HDCP 2.3), HDMI SCDC register reads and writes and DisplayPort DPCD register reads and writes
- **Aux Channel Analyzer (ACA) passive protocol feature** enables passive monitoring of the HDMI DDC or DisplayPort Aux Channel between a source and sink device
- **Enhanced Audio Return Channel (eARC)** enables basic testing of eARC Tx and Rx devices
- **Video pattern and Format Library** with test patterns for High Dynamic Range
- **Battery powered** up to one (1) hour with six (6) hour charge
- **Command line interface** for automated testing

The Teledyne LeCroy quantumdata M21 Video Analyzer for HDMI and DisplayPort testing offers a rich set of features and benefits to design engineers in R&D as well as professional A/V installers for testing HDMI and DisplayPort source devices. The M21 instrument is also equipped with an HDMI 48Gb/s Video Generator function enabling test engineers and pro A/V integrators to run a variety of video, audio and protocol tests on digital video, displays and distribution equipment up to 8K resolutions.

The portable size, battery operation and large user-friendly touch screen provides convenience to complement the rich feature set. The user interface design and test functions greatly reduce time-to-insight whether running tests on distinct devices or entire digital video distribution networks.

Diagnose and Troubleshoot


The M21 provides an at-a-glance status bar on the top of the touch screen. The status bar provides basic information about what the instrument is transmitting to a display and what it is receiving from a source. The instrument can run quick video audio and protocol tests on individual sources, displays, repeaters, distribution gear as well as cables. Protocol tests include tests for EDID, HDCP authentication—1.4 & 2.3—infoframes and timing data. You can place the M21 at any point in a video distribution network and run tests upstream toward the source while emulating a display (or sink). Or you can run tests downstream as a video generator while emulating an HDMI FRL source.

Ease of Use

The M21's large 10" diagonal color touch screen provides ease of use and quick status information. The rich set of routine tests and diagnostic tests are accessible with just a few touch clicks. You can quickly configure settings on the output. A rich command set, available either through the Ethernet port or RS-232 serial ports, supports automated testing.



Video Analysis and Diagnostic Test Features

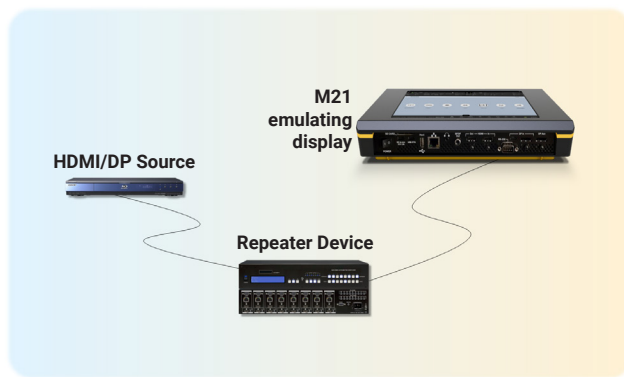

Example Source Test Setup

View Incoming Video and Data

The M21 Video Display panel provides quick *time-to-insight* when conducting routine tests or diagnosing interoperability problems. The embedded display shows the incoming video frames and includes a status bar which provides essential information about the incoming HDMI® or DisplayPort video.

Test Response to EDIDs

The M21 enables you to emulate any HDMI or DisplayPort EDID to test a source's response. You can use commercial EDIDs or test EDIDs with specific video and audio support. You can test with EDIDs that have known


anomalies or read an EDID from a UHD TV or repeater device and save for future testing.

Verify Cable/Network


Because the M21 has both an HDMI output and an HDMI input port, you can use the instrument to test HDMI distribution equipment to verify integrity of extenders, repeaters, matrix switches and distribution amps. You can test individual devices or entire networks including digital video cables.

View Aux Channel Transactions

Complex interoperability problems require visibility into the auxiliary channel. You can monitor HDMI Display Data Channel (DDC) data to view FRL link training, EDID exchange, HDCP authentication and SCDC reads and writes.

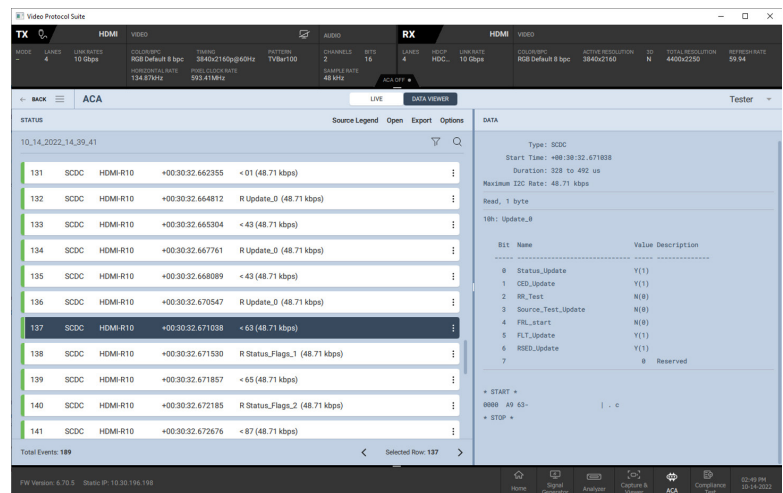

Aux Channel Analyzer Showing HDMI (or DP) Link Training Transactions

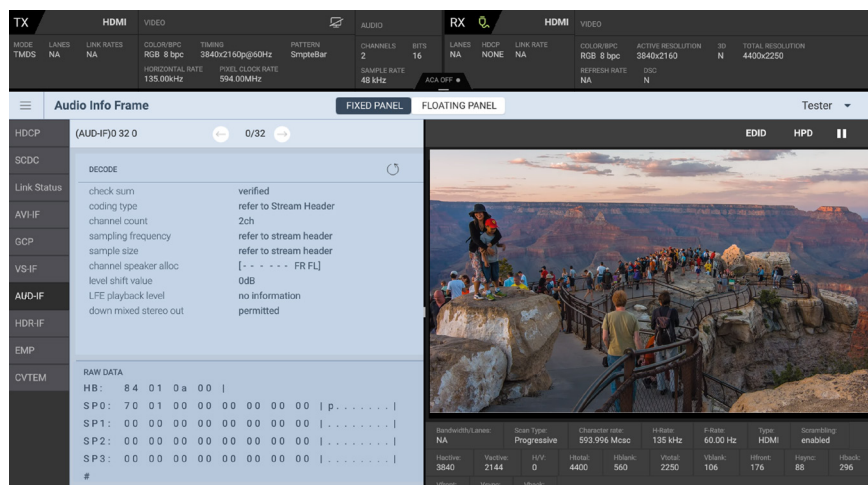

Analyzer "Real Time" Showing Incoming Video, Colorimetry, Timing and Metadata

For DisplayPort, the M21 can monitor Power Delivery (PD) negotiations into DP Alt mode as well as Aux Channel transactions such as EDID exchange, link training transactions and HDCP authentication. You can check the details of each transaction and distribute captured test logs to colleagues and subject matter experts.


Verify HDMI eARC Audio

The M21 enables you to transmit eARC audio to an eARC Rx device such as a sound bar or A/V receiver.

Video Generator Features (HDMI-only)

Verify Video on an HDMI TV



The M21 Video Generator enables you to select from CTA and VESA formats or create custom formats including 8K resolutions for UHD testing and set bit depth, pixel encoding, colorimetry and sampling parameters. You can use the test pattern library to verify specific video display elements and special test patterns for testing High Dynamic Range (HDR). Scroll bitmaps to test motion artifacts. You can also transmit test streams that have been compressed with HDMI® Display Stream Compression (DSC).

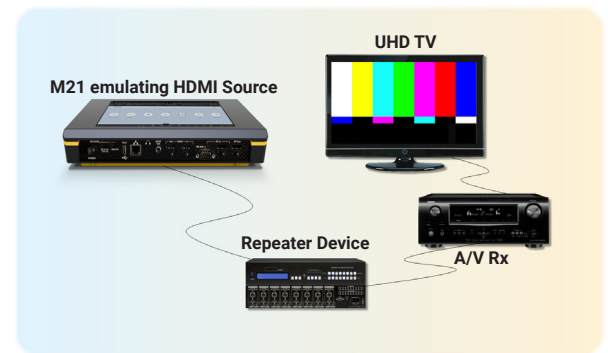


Sink (Display) Test Setup

Verify HDMI EDID Content

The M21 enables you to view EDID contents of a connected display to verify audio and video capabilities (including HDR elements). And you can verify the structure of an EDID and check for errors.

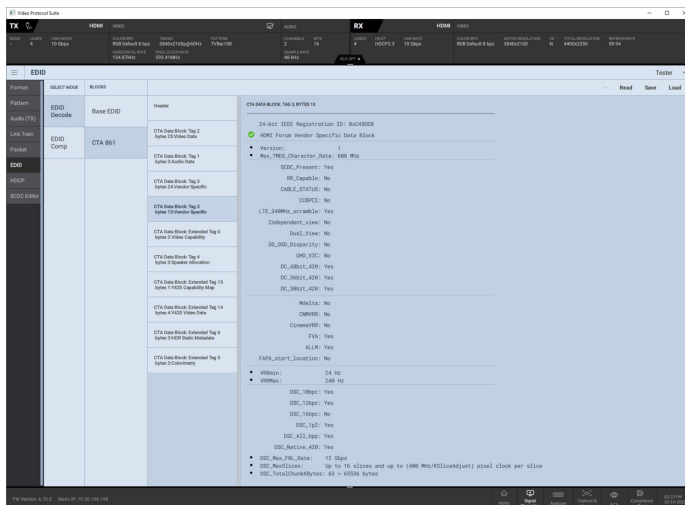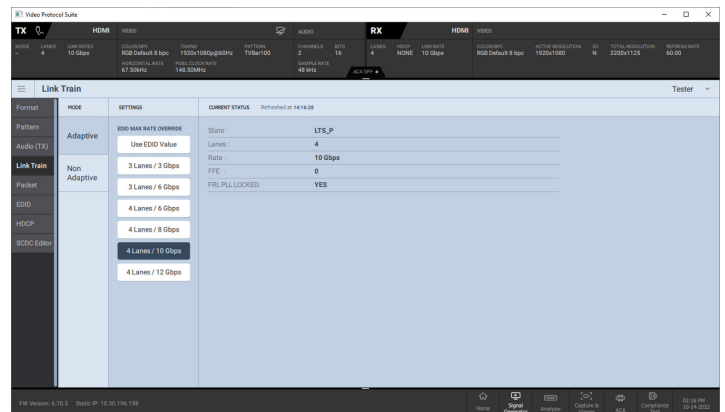

Configuring HDMI FRL Link Training

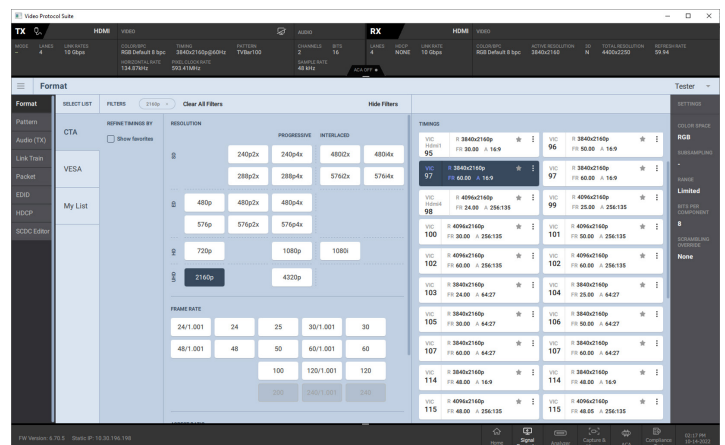

Select the Video Format

Verify HDMI Audio on an HDMI TV or Audio System

You can verify audio on displays or audio systems using programmable LPCM test tones. You can set sampling rate, bit depth, amplitude and number of channels. Alternatively, you can select Dolby and DTS compressed audio clips including Dolby TrueHD and DTS Master Audio.

Verify HDMI eARC Audio

You can verify the eARC audio from an eARC Tx port on an HDMI TV and listen to the audio and view the audio metadata.

Verify HDCP Authentication

The M21 can monitor the HDCP authentication transactions using the instrument's Aux Channel Analyzer (ACA) utility to verify proper operation for HDCP 1.4 and 2.3. Enabling and disabling HDCP can quickly reveal the nature of an interoperability problem.



Specifications

HDMI	
Standard Formats	VESA, CTA
HDMI® Connectors	HDMI: (1) Type A Tx; (1) Type A Rx.
Protocols (HDMI)	HDMI (Tx & Rx) TMDS, FRL, DSC, FEC, eARC, HDCP
Video Colorimetry	ITU-R BT.601-5, ITU-R BT.709-5, BT.2020 (YCbCr)
Lane Rates	12 Gb/s / Lane; 48Gb/s aggregate data rate
Max Pixel Rate/Character Rate	1200MHz
Color Depths	8, 10, 12, 16 bits per component
Video Encoding / Sampling	RGB, YCbCr; 4:4:4, 4:2:2, 4:2:0
HDCP	Versions 1.4 and 2.3
Audio Formats	LPCM, Dolby (DD, DD+, TrueHD), DTS (ES, HD, Master Audio)
Audio LPCM Settings	Sampling rates (32 – 192 kHz); Bits per sample (16, 20, 24)

DisplayPort	
Standard Formats	VESA (DMT, CVT-R, CVT), CTA
Protocols (DisplayPort)	HBR, UHBR, DSC, FEC, HDCP
DisplayPort Connectors	One (1) Rx USB-C One (1) Rx Full-Sized DisplayPort One (1) DP for passive Aux monitor
Link rates / Lanes	DisplayPort Rx Connector: RBR/HBR: 1.62, 2.70, 5.40, 8.1 Gb/s Link Rates UHBR 10.0 Gb/s Link Rates Supported on 1, 2, 4 Lanes USB-C Rx Connector: RBR/HBR: 1.62, 2.70, 5.40, 8.1 Gb/s Link Rates; UHBR: 10.0 & 13.5Gb/s Supported on 1, 2, 4 Lanes
Color Depths	6, 8, 10, 12, 16 bits
Pin Assignments	C and E

Physical/Electrical	
AC Adapter from USB-C port	100-240 VAC, 47-63Hz on USB-C port with wall adapter (provided)
Battery	Nickel metal hydride batteries for short term use- up to one hour on an six (6) hour charge
Dimensions	Height: 1.25 in. (3.175 cm) Width: 12.1 in. (30.734 cm) Depth: 8.2 in. (20.828 cm)
Weight	4.40 lbs; 2.00 Kg
Environmental	Operating Temp: 32 to 104 (F); 0 to 40 (C)

Administration and Connectors	
Embedded Display	10 inch diagonal screen with 1280 x 800 resolution with 24 bit color
Ethernet	For command line control and software upgrades
RS-232	For command line control
USB-C DC In	For powering/charging the M21
USB-C OTG	USB On-the-Go for connection to external devices
USB Host	For connection to external devices
Stereo Speakers	For monitoring incoming LPCM audio
Headphone Jack	For monitoring incoming LPCM audio
SPDIF Out	For monitoring incoming LPCM audio

Ordering Information

Product Description

quantumdata M21 Base Unit (requires either QD-95-00260 or QD-95-00265)

Product Code

QD-00-00262

Software Options (HDMI)

TMDS Tx and Rx - Video analysis and video generation for TMDS up to 18Gb/s data rates (requires QD-00-00262)

QD-95-00260

FRL Tx and Rx functionality - Video generation and video analysis for FRL up to 48Gb/s data rates (requires QD-95-00260)

QD-95-00261

HDMI ACA Monitoring - Monitor HDMI DDC channel emulating a source or sink or passively between a source and sink (requires QD-95-00260)

QD-95-00262

Functional Cable test - Run functional cable test in loopback mode (requires QD-95-00260)

QD-95-00263

eARC Tx & Rx - Basic test of eARC Tx and Rx functionality (requires QD-95-00261)

QD-95-00264

Software Options (DisplayPort)

HBR Rx functionality - Video analysis for HBR3 up to 8.1Gb/s (requires QD-00-00262)

QD-95-00265

UHBR Rx functionality - Video analysis for HBR3 & UHBR up to 13.5Gb/s data rates (requires QD-95-00265)

QD-95-00266

ACA Monitoring - Monitor DP Aux channel transactions thru Rx emulation/passive (requires QD-95-00265)

QD-95-00267



Local sales offices are located throughout the world.
Visit our website to find the most convenient location.

1-800-5-LeCroy • teledynelecroy.com

 **TELEDYNE**
LECROY