


Product Images

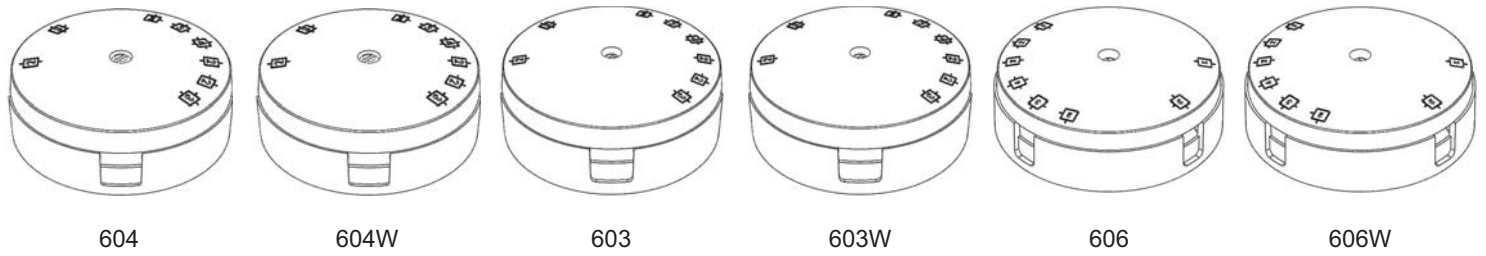

Brief Description of Products

Junction box with cable entries in the side wall that are selectable by alignment of symbols and text on the cover.

Features

- Captive cover fixing screw
- Slotted terminals allowing for unbroken ring wiring
- 4 Selective entries in side wall with knockouts allowing for apertures to be enlarged
- 4 knockouts in base
- Available in white and brown urea

Technical Specifications (604, 604W products)

Standard(s)	BS EN 60670
Rating	30 Amp 250V~
Terminal Capacity - L & N	4 x 1.5mm ²
No. of cable entries per terminal	1
No. of terminals	4
Covered by RoHS directive	No
Covered by WEEE directive	No
Size	80mm dia x 31mm
Fixing Centres	50.8mm

Technical Specifications (603, 603W products)

Standard(s)	BS EN 60670
Rating	20 Amp 250V~
Terminal Capacity - L & N	4 x 4.0mm ²
No. of cable entries per terminal	1
No. of terminals	3
Covered by RoHS directive	No
Covered by WEEE directive	No
Size	89.5mm dia x 36mm
Fixing Centres	50.8mm

Technical Specifications (606, 606W products)

Standard(s)	BS EN 60670
Rating	20 Amp 250V~
Terminal Capacity - L & N	3 x 1.5mm ²
No. of cable entries per terminal	1
No. of terminals	6
Covered by RoHS directive	No
Covered by WEEE directive	No
Size	88mm dia x 30mm
Fixing Centres	50.8mm

Line Diagrams

604

604W

Packaging Information

Cat.No	Description	Packaging Type			Pack Quantity			Barcode		
		Product	Inner Box	Outer Box	Each	Inner Box	Outer Box	Individual	Inner Box	Outer Box
604	20A, 4 TERMINAL	New BG Packing	New BG Packing		10	100		5021166 603299	5021166 603282	
604W	20A, 4 TERMINAL	New BG Packing	New BG Packing		10	100		5021166 603190	5021166 603183	
603	30A, 3 TERMINAL	New BG Packing	New BG Packing		10	100		5021166 604296	5021166 604289	
603W	30A, 3 TERMINAL	New BG Packing	New BG Packing		10	100		5021166 604197	5021166 604180	
606	20 AMP, 6 TERMINAL	Clameshell			1	10	100	5021166606283	5021166606290	
604W	20 AMP, 6 TERMINAL	Clameshell			1	10	100	5021166606191	5021166606184	

Weights and Dimensions

Cat.No	Description	Dimension (W x L X H) unit : cm			Weight (g)			CBM (m ³)		
		Product	Inner Box	Outer Box	Each	Inner Box	Outer Box	Individual	Inner Box	Outer Box
604	20A, 4 TERMINAL									
604W	20A, 4 TERMINAL									
603	30A, 3 TERMINAL									
603W	30A, 3 TERMINAL									
606	20 AMP, 6 TERMINAL	8.75 x 8.75 x 3.2	16.2 x 18.2 x 9.5	33.5x49.5x19.5	148	96	760			
604W	20 AMP, 6 TERMINAL	8.75 x 8.75 x 3.2	16.2 x 18.2 x 9.5	33.5x49.5x19.5	148	96	760			

WIRING INSTRUCTIONS

JUNCTION BOXES

TECHNICAL HELPLINE: 0800 169 5560

SAFETY WARNING

Before use please read carefully and use in accordance with these safety wiring instructions.

Before commencing any electrical work ensure the supply is switched off at the mains, either by switching off the consumer unit or by removing the appropriate fuse.

Wiring should be in accordance with the latest edition of the IEE regulations (BS 7671).

If in doubt consult a competent electrician.

JUNCTION BOX – GENERAL ADVICE

The terminals of Junction Boxes can be used for any polarity.

Remove the central screw and remove cover to expose terminals. In multi-terminal junction boxes, take care to use only one polarity in any one group of terminals.

Position the way the cable lies, so as to pass through one of the apertures in the side of the base.

For Selective Entry boxes selecting the apertures to be used by rotating the guide marked on the lid.

When cable installations are complete, position the cover so as to block off the cable entry apertures not used in the base and tighten the screw.

Alternatively for non-selective junction boxes the required apertures can be easily broken away using a pair of pliers and with minimal force. Clean edges to remove any sharp edges.

Wire Identification – Twin & Earth Cable

Note - As from 1st April 2004 new colour codes for hard wire installations was introduced.

EARTH = GREEN/YELLOW Sleaving
BLACK (pre Apr 04) / BLUE (after Apr 04) = NEUTRAL
RED (pre Apr 04) / BROWN (after Apr 04) = LIVE

The ends of the individual conductors should have the insulation removed by approx. 10mm. Any bare earth conductors should be sleeved to within 10mm of the ends. (These details are for general information only and conductor lengths may need to be trimmed in certain installations).


For lighting circuits, use sleeving of the appropriate 'live' colour to ensure clear identification of live connections.

See diagram for typical lighting circuit wiring using 4-way junction box.

To prevent fire hazard always use cable of the correct rating and type.

1.

4-WAY JUNCTION BOX – FOR LIGHTING CIRCUIT

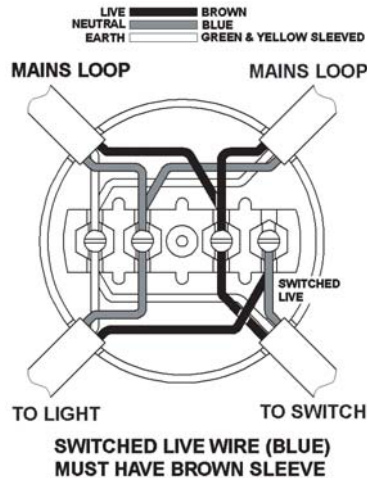

2.

3.