

Control and signalling units Ø 22

Harmony® style 5
Pushbuttons, switches and pilot lights, with double insulated bezel


Description

The Ø 22, style 5 range of control and signalling units comprises:

Sub-assemblies for user assembly ZB5-A




Pushbuttons and switches:
Head and body
sub-assemblies



Pilot lights:
Head and body
sub-assemblies




2

Component parts and accessories ZB



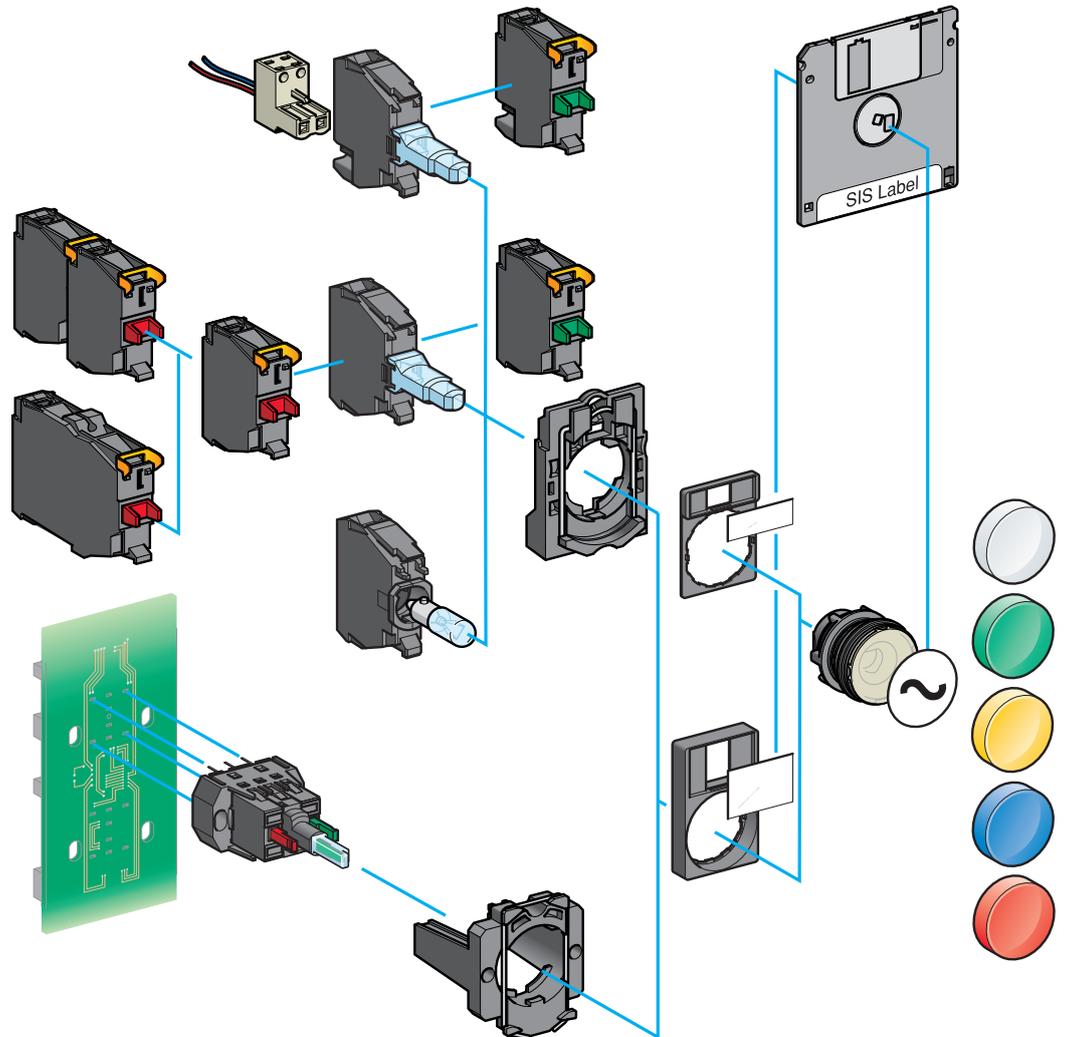


Schematic library

Pushbuttons and Emergency stop pushbuttons

			
Pushbutton N/O contact	Pushbutton N/C contact	Mushroom head, spring return N/O contact	Emergency stop latching mushroom head. Push-pull N/C contact
			
Emergency stop trigger action mushroom head Push-pull N/O + N/C contact	Emergency stop trigger action mushroom head Turn to release - N/C contact	Emergency stop trigger action mushroom head Key release - N/C contact	Emergency stop trigger action mushroom head Turn to release N/O + N/C contact
			
Emergency stop trigger action mushroom head Key release N/O + N/C contact	Double-headed pushbutton N/O + N/C contact		



Selector switches

			
Selector switch - 2 position, stay put N/O contact	Selector switch - 3 position, stay put N/O + N/O contact	Selector switch - 3 position, 2 spring return to centre N/O + N/O contact	Selector switch - 2 position, stay put, key withdrawal LH position - N/O contact
			
Selector switch - 2 position, spring return from right to left, key withdrawal LH position N/O contact			



Pilot lights

		
Pilot light with BA 9s incandescent bulb	LED pilot light	Pilot light with integral transformer, 230 V ~ primary, 6 V secondary. BA 9s incandescent bulb or LED

Illuminated pushbuttons and selector switches

			
Illuminated pushbutton BA 9s incandescent bulb N/O + N/C contact	Illuminated pushbutton with LED N/O + N/C contact	Illuminated pushbutton with integral transformer, 230 V ~ 50/60 Hz primary, 6 V secondary. BA 9s incandescent bulb or LED N/O + N/C contact	Double-headed pushbutton with LED pilot light N/O + N/C contact
			
Illuminated selector switch with LED - 2 position stay put N/O + N/C contact			

Joystick controllers

2 direction		4 direction	
			
Without spring return	With spring return	Without spring return	With spring return

Control and signalling units Ø 22

Harmony® style 5

Pushbuttons, switches and pilot lights, with double insulated bezel
Sub-assemblies, ZB5-A


2

Non illuminated units for user assembly

Pushbuttons, spring return, without marking

Contact functions

Body sub-assemblies



Screw clamp terminals
ZB5-AZ10/AZ141
see page 2/10



Plug-in connector
ZB5-AZ10p4/AZ1414
see page 2/10

Head sub-assemblies



Flush push

ZB5-AA0/AA9
see page 2/11

ZB5-AA
see page 2/11

Flush push for insertion of legend

ZB5-AA8
see page 2/11

Flush push

ZB5-CA
see page 2/11



Projecting push

ZB5-AL
see page 2/11

Recessed push

ZB5-AA4
see page 2/11

Booted flush push

ZB5-AP/AP8
see page 2/11

Projecting push

ZB5-CL
see page 2/11

Pushbuttons, spring return, with marking



Flush push

ZB5-AA3/AA4
see page 2/12



Projecting push

ZB5-AL
see page 2/12



Flush push

ZB5-CA3/CA9
see page 2/12


"Push-turn" pushbuttons



Lockable
ZB5-AFD
see page 2/12



Knurled knob (1)
ZB5-AF
see page 2/12



Double-headed pushbuttons, spring return



Flush pushes (IP 40/IP 66)
Without/with markings
ZB5-AA81/AA82
see page 2/13



ZB5-AA91/AA92
see page 2/13



Flush push + Projecting push (IP 40/IP 66)
Without/with markings
ZB5-AL83/AL84
see page 2/13



ZB5-AL93/AL94
see page 2/13

"Push-push to release" pushbuttons



Flush push
ZB5-AH0/CH0
see page 2/13



Projecting push
ZB5-AH
see page 2/13



Flush push
ZB5-CH0
see page 2/13

Control and signalling units Ø 22

Harmony® style 5

Pushbuttons, switches and pilot lights, with double insulated bezel
Sub-assemblies, ZB5-A

Non illuminated units for user assembly (continued)

Mushroom head pushbuttons, spring return


Contact functions (continued)

Body sub-assemblies



Screw clamp terminals
ZB5-AZ10/AZ141
see page 2/10

Mushroom head pushbuttons, latching




Plug-in connector
ZB5-AZ10/AZ1414
see page 2/10

Selector switches and key switches

Toggle switches

Head sub-assemblies



Ø 30
Ø 40
Ø 60

Spring return
ZB5-AC/AR
see page 2/14




Ø 30
Ø 40
Ø 60

Push-pull
ZB5-AT84/AT/AX
see page 2/15



Ø 30
Ø 40
Ø 60

Turn to release
ZB5-AS8/A4/AS4/AS5/AS6
see page 2/15



Ø 30
Ø 40
Ø 60

Key release
ZB5-AS9/A4/AS7/AS1/AS2
see page 2/15



Standard handle (1)
ZB5-AD
see page 2/16

Long blk.handle (1)
ZB5-AJ
see page 2/17



Knurled blk. knob (1)
ZB5-AD9
see page 2/18



Key switches (2)
ZB5-AG/AG0
see page 2/19



2 positions
ZB5-AD8
see page 2/19

(1) Switch handle and knob	(2) Key withdrawal positions for key switches	
	Key withdrawal positions	Key withdrawal positions
∨	∨	∨
∧	∧	∧
∩	∩	∩
∪	∪	∪
∩	∩	∩
∪	∪	∪
∩	∩	∩
∪	∪	∪

Control and signalling units Ø 22

Harmony® style 5


Pushbuttons, switches and pilot lights, with double insulated bezel

Sub-assemblies, ZB5-A


Pilot lights for user assembly

Signalling functions

Body sub-assemblies Integral LED

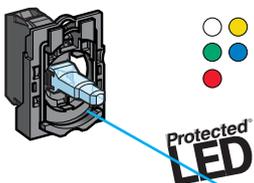

Screw clamp terminals
ZB5-AVB/AVG/AVM
see page 2/20

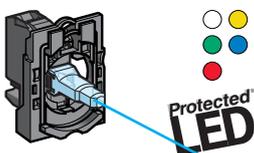

Plug-in connector
ZB5-AVB•4/AVG•4/AVM•4
see page 2/20

Head sub-assemblies




With lens mounted
ZB5-AV0•3
see page 2/21



ZB5-CV0•3
see page 2/21



With 5 separate lenses
ZB5-AV003
see page 2/21




ZB5-CV003
see page 2/21

Body sub-assemblies for BA 9s bulb



Direct supply
Screw clamp terminals
ZB5-AV6
see page 2/21

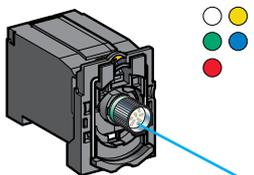

Via integral transformer
Screw clamp terminals
ZB5-AV•/AV3D•(1)/AV5D•(1)
see page 2/21

Head sub-assemblies



With lens mounted
ZB5-AV0•
see page 2/21

Control and signalling units Ø 22

Harmony® style 5

Pushbuttons, switches and pilot lights, with double insulated bezel
Sub-assemblies, ZB5-A

Illuminated pushbuttons and selector switches for user assembly

Illuminated pushbuttons, spring return


Double headed pushbuttons, spring return, with pilot light

Illuminated "push-push to release" pushbuttons and illuminated selector switches with standard handle


Illuminated pushbuttons, spring return

Combined contact and signalling functions

Body sub-assemblies Integral LED



Screw clamp terminals
ZB5-AW08/AW0G/
AW0M
see page 2/24




Plug-in connector
ZB5-AW0B●●4/
AW0G●●4/AW0M●●4
see page 2/26

Body sub-assemblies For BA 9s bulb



Direct supply
Screw clamp terminals
ZB5-AW06●
see page 2/28



Via integral transformer
Screw clamp terminals
ZB5-AW03/4/5/3D/5D
see page 2/28

Head sub-assemblies



Flush push with cap
mounted or not

ZB5-AW3●3/AW9●3
see page 2/29



Flush push for
insertion of legend

ZB5-AA●8
see page 2/29



Booted Flush push

ZB5-AW5●3
see page 2/29



Projecting push

ZB5-AW1●3/AL●8
see page 2/29



Flush or projecting push

ZB5-CW3●3/CW1●3
see page 2/29



Flush pushes
Without/with markings

ZB5-AW81●●●3,
see page 2/30

ZB5-AW82●●●3
see page 2/30



Flush push + projecting push
Without/with markings

ZB5-AW83●●●3,
see page 2/30

ZB5-AW84●●●3
see page 2/30




Flush or projecting
"push-push to release"

ZB5-AH0i3/AH●3
see page 2/30



Selector switches with
standard handle

ZB5-AK1●i3
see page 2/31



2

Environment			
Protective treatment standard version			"TH"
Ambient air temperature around the device	Storage	°C	- 40...+ 70
	Operation	°C	- 25...+ 70 unless otherwise stated
Electric shock protection	Conforming to IEC 536		Class II
Degree of protection	Conforming to IEC 529		IP 65, unless otherwise stated IP 66, for booted pushbutton heads
	Conforming to NEMA		NEMA type 4X and 13, unless otherwise stated
High pressure cleaning resistance		Pa	70 x 10 ⁵ (70 bar); distance: 0.1 m Temperature: 55°C
Mechanical shock protection	Conforming to EN 50102		Non illuminated heads: IK 03
			Illuminated heads: IK 05
Conforming to standards			IEC/EN 60947-1, IEC/EN 60947-5-1, IEC/EN 60947-5-4, JIS C 4520, UL 508, CSA C22-2 n° 14
Product certifications	UL Listed, CSA		Standard single contacts with screw clamp terminals: A600; Q600 Double contacts with screw clamp terminals: A600; Q600 Light blocks with screw clamp terminals Joystick controllers XD5-PA/ZD5-PA: A600; R300
	UL Recognized, CSA		Standard single contacts for plug-in connector: A300; R300 Standard single contacts for printed circuit board: B300; R300
	BV, RINA, LROS, DNV, GL (pending)		Standard single contacts and double contacts with screw clamp terminals
Terminal identification	Conforming to EN 50005 & EN 50013		

Characteristics of contact blocks

Mechanical characteristics			
Contact operation	N/C or N/O		Slow break
Positive operation	Conforming to IEC/EN 60947-5-1 Appendix K		All functions incorporating a N/C contact are positive opening operation
Operating travel (to change electrical state)	Pushbutton	mm	Changing N/C state: 1.5 Changing N/O state: 2.6 Total travel: 4.3
		mm	
Operating force	Pushbutton	N	Changing N/C state: 3.5 Changing N/O state: 3.8
		N	
	Additional contact (extra to change state)	N	Single N/C contact: 2 Single N/O contact: 2.3
		N	
Emergency stop with N/C + N/O	N	Standard push-pull: 45 Trigger action push-pull: 50	
	N		
		N	Standard turn to release and key release: 40 Trigger action turn to release and key release: 44
		N	

Characteristics of contact blocks (continued)

Mechanical characteristics (continued)

Operating torque (to change electrical state)	Selector switches	N.m	N/O contact: 0.14
	Additional contact (extra)	N.m	N/O contact: 0.05
Mechanical durability (in millions of operating cycles)	Pushbuttons	Spring return	5
		Double-headed	1
		Push-push to release	0.5
	Selector switches	Non illuminated	3
		Illuminated	1
	Toggle switches		0.5
	Emergency stop pushbuttons		0.3
	Joystick controllers		1
	Standard contact blocks		5
Low power switching contact blocks		0.5	
Vibration resistance	Conforming to IEC 68-2-6	gn	Frequency: 2 to 500 Hz: 5
Shock resistance	Conforming to IEC 68-2-27	gn	All functions except mushroom head pushbuttons
		gn	half sine wave acceleration 11 ms: 50
		gn	half sine wave acceleration 18 ms: 30
		gn	Mushroom head pushbuttons (half sine wave acceleration 11 ms: 10

Electrical characteristics

Cabling capacity	Conforming to IEC/EN 60947-1	mm² mm²	Screw clamp terminals Min.: 1 x 0.22 without cable end Max.: 2 x 1.5 with cable end Cross headed screw (Pozidrive or Phillips type 1), slotted for flat 4 and 5.5 mm screwdriver. Tightening torque: 0.8 N.m (max. 1.2 N.m)
Contact material	Silver alloy (Ag / Ni)		Standard single and double blocks with screw clamp terminals Blocks for plug-in connector Standard blocks for printed circuit board connection
	Gold flashed (Ag / Ni / Au)		Low power switching contact blocks with screw clamp terminals Low power switching contact blocks for printed circuit board connection
Short-circuit protection	Conforming to IEC/EN 60947-5-1	A A A	Standard single and double blocks with screw clamp terminals: 10 (gG cartridge fuse conforming to IEC 269-1) Blocks for plug-in connector: 4 (gG cartridge fuse conforming to IEC 269-1) Standard blocks for printed circuit board connection: 4 (gG cartridge fuse conforming to IEC 269-1)
Nominal thermal current	Conforming to IEC/EN 60947-5-1	A A A	Standard single and double blocks with screw clamp terminals: 10 Blocks for plug-in connector: 10 Standard blocks for printed circuit board connection: 6
Rated insulation voltage	Conforming to IEC/EN 60947-1	V V V	Standard single and double blocks with screw clamp terminals: Ui = 600 degree of pollution 3 Blocks for plug-in connector or Faston connectors: Ui = 250 degree of pollution 3 Standard blocks for printed circuit board connection: Ui = 250 degree of pollution 3
Rated impulse withstand voltage	Conforming to IEC/EN 60947-1	kV kV kV	Standard single and double blocks with screw clamp terminals: Uimp = 6 Blocks for plug-in connector: Uimp = 4 Standard blocks for printed circuit board connection: Uimp = 4

Characteristics of contact blocks (continued)

Electrical characteristics (continued)

Rated operational characteristics
Conforming to IEC/EN 60947-5-1

a.c. supply:
utilisation category AC-15

Standard single and double blocks with screw clamp terminals:
A600: Ue = 600 V and Ie = 1.2 A or Ue = 240 V and Ie = 3 A
or Ue = 120 V and Ie = 6 A

Blocks for plug-in connector:
A300: Ue = 120 V and Ie = 6 A or Ue = 240 V and Ie = 3 A

Standard blocks for printed circuit board connection:
B300: Ue = 120 V and Ie = 3 A or Ue = 240 V and Ie = 1.5 A

d.c. supply:
utilisation category DC-13

Standard single and double blocks with screw clamp terminals:
Q600: Ue = 600 V and Ie = 0.1 A or Ue = 250 V et Ie = 0.27 A
or Ue = 125 V and Ie = 0.55 A

Joystick controllers XD5-PA/ZD5-PA:
R300: Ue = 125 V and Ie = 0.22 A or Ue = 250 V and Ie = 0.1 A

Blocks for plug-in connector:
R300: Ue = 125 V and Ie = 0.22 A or Ue = 250 V and Ie = 0.1 A

Standard blocks for printed circuit board connection:
R300: Ue = 125 V and Ie = 0.22 A or Ue = 250 V and Ie = 0.1 A

Characteristics of special contact blocks for low power switching

VA
A
V

P max.: 12
I max.: 0.1
U max.: 24

Electrical durability
Conforming to IEC/EN 60947-5-1
Appendix C
Operating rate 3600 operating cycles/hour. Load factor: 0.5

a.c. supply for 1 million operating cycles, utilisation category AC-15

V
A

Standard single blocks with screw clamp terminals:

24	120	230
4	3	2

Standard double blocks with screw clamp terminals and blocks for plug-in connector:

V
A

24	120	230
3	1.5	1

d.c. supply for 1 million operating cycles, utilisation category DC-13

V
A

Standard single blocks with screw clamp terminals:

24	110
0.5	0.2

Standard double blocks with screw clamp terminals and blocks for plug-in connector:

V
A

24	110
0.4	0.15

Electrical reliability

Failure rate
According to IEC/EN 60947-5-4

- In clean environment

Standard blocks:
- at 17 V and 5 mA, $\lambda < 10^{-8}$
- at 5 V and 1 mA, $\lambda < 10^{-6}$

Special blocks with gold flashed contacts, for low power switching:
- at 5 V and 1 mA, $\lambda < 10^{-8}$

- In dusty environment

Special blocks with gold flashed contacts and dust protection, for low power switching:
- at 5 V and 1 mA, $\lambda < 10^{-8}$

Characteristics of illuminated units (pilot lights, illuminated pushbuttons and illuminated switches)

Mechanical characteristics

Vibration resistance	Conforming to IEC 68-2-6	gn	Frequency: 12 to 500 Hz: 5
Shock resistance	Conforming to IEC 68-2-27	gn gn	Half sine wave acceleration 11 ms: 50 Half sine wave acceleration 18 ms: 30

Electrical characteristics

Cabling capacity	Conforming to IEC/EN 60947-1	mm ² mm ²	Screw clamp terminals Min.: 1 x 0.22 without cable end (1 x 0.34 for linking) Max.: 2 x 1.5 with cable end
Rated insulation voltage	Conforming to IEC/EN 60947-1	V V V	Direct supply pilot light blocks (BA 9s bulb): U _i = 250 degree of pollution 3 Pilot light blocks with integral LED: U _i = 250 degree of pollution 3 Pilot light blocks with transformer: U _i = 600 degree of pollution 3
Rated impulse withstand voltage	Conforming to IEC/EN 60947-1	kV kV kV	Direct supply pilot light blocks (BA 9s bulb): U _{imp} = 4 Pilot light blocks with integral LED: U _{imp} = 4 Pilot light blocks with transformer: U _{imp} = 6

Specific characteristics of light modules only, with integral LED

Voltage limits	Nominal voltage	V	12 V: 10 to 15 $\overline{\text{---}}$; 10.2 to 13.8 \sim 24 V: 19.2 to 30 $\overline{\text{---}}$; 21.6 to 26.4 \sim 24 to 120 V: 20 to 132 $\overline{\text{---}}$ 48 to 120 V: 40 to 132 \sim 240 V: 195 to 264 \sim
Current consumption	Applicable to all colours	mA mA mA mA	$\overline{\text{---}}$ 12 V supply blocks: 18 $\overline{\text{---}}$ 24 V supply blocks: 18 \sim 120 V supply blocks: 14 \sim 240 V supply blocks: 14
Service life	At nominal voltage and at an ambient temperature of 25 °C	H	100,000
Surge withstand	Conforming to IEC 61000-4-5	kV	1
Resistance to fast transients	Conforming to IEC 61000-4-4	kV	2
Resistance to electromagnetic fields	Conforming to IEC 61000-4-3	V/m	10
Resistance to electrostatic discharges	Conforming to IEC 61000-4-2	kV	8/6
Direct parallel connection across inductive load E.g.: contactor coil or solenoid	Maximum power of load	VA	For applications involving high powers (\geq 30 VA), a ZBZ-V LED suppressor must be connected across the light block terminals (see page 2/33)
Electromagnetic emission	Conforming to EN 55011		Class B

Specific characteristics

Body/fixing collar

Tightening torque of fixing screw		N.m	0.8 (1.2 max.)
-----------------------------------	--	-----	----------------

Hour counters and annunciators

Voltage limits	Hour counter and annunciator	V	\pm 10% of the nominal voltage
Current consumption	Hour counter	mA	XB5-DSB ($\overline{\text{---}}$ 12 to 24 V): 7 to 15 XB5-DSG (\sim 120 V): 8 XB5-DSM (\sim 230 to 240 V): 8
	Annunciator	mA	5

