
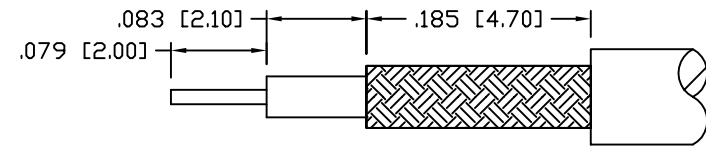
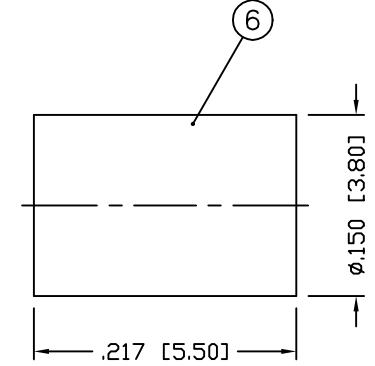
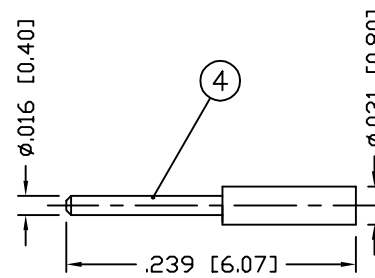


REVISIONS

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
809	A	RELEASED	JWM	9/12/02	HO	9/12/02	DJC	9/12/02

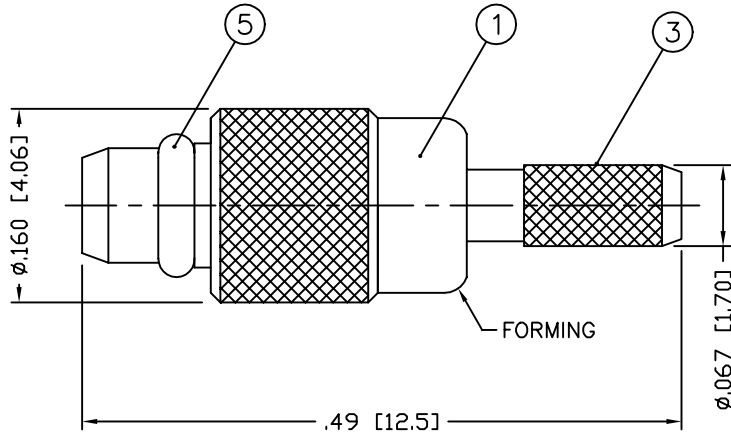

RECOMMENDED
CABLE STRIPPING DIM'S

#	DESCRIPTION	QTY	MATRL	FINISH
1	BODY	1	BRASS	GOLD, 3 MICRO
2	INSULATOR	1	PTFE	---
3	FERRULE STUD	1	BRASS	GOLD, 3 MICRO
4	CONTACT	1	BRASS	GOLD, 3 MICRO
5	RETAINING RING	1	Be. Cu.	GOLD, 3 MICRO
6	FERRULE	1	COPPER	GOLD, 100 MICRO

SPECIFICATIONS:

IMPEDANCE: 50 OHMS
FOR RG-178, 178A, 178B, 196, 196A/U

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
Jeff McVicker	9/12/02
CHECKED BY:	DATE:
Hisham Odish	9/12/02
APPROVED BY:	DATE:
Daniel Carey	9/12/02

DRAWING TITLE: MMCX Crimp Plug			
SIZE A	DWG. NO. SPC10011	ELECTRONIC FILE 18C1884.dwg	REV A
SCALE: NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1	