300 Series
Kulka® 672 GP Series

600 Volts

CE

Top Mounted Hardware is .250" Wide

MM = Dim x 25.4

Hardware Options: (Hardware options may affect ratings - consult factor
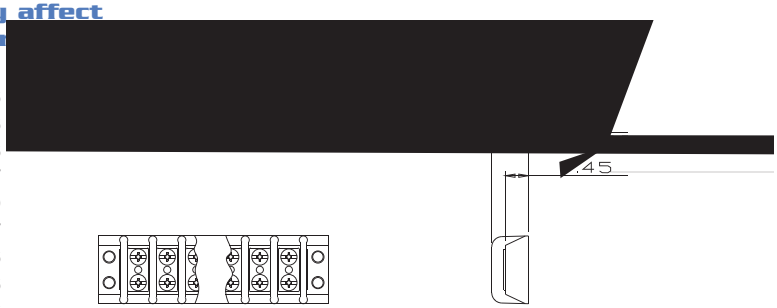
MSP	KULKA			
(F1)	KT55	=	Full Quick Connect (0° Flat)	See Page 96
(F2)	KT56	=	Full Quick Connect (45° Bend)	See Page 96
(F3)	KT57	=	Full Quick Connect (90° Bend)	See Page 96
(S)	ST	=	Full Solder	See Page 97
(LL 300)	J 602	=	Line to Line Jumper	See Page 99
(HS)	3/4 ST	=	Half Solder	See Page 97
(HF1)	KT61	=	Half Quick Connect (0° Flat)	See Page 96
(HF2)	KT62	=	Half Quick Connect (45° Bend)	See Page 96
(HF3)	KT63	=	Half Quick Connect (90° Bend)	See Page 96
(SP)	3786	=	Sems Pressure Saddle Screw	See Page 99
(SPSE)		=	Sems Pressure Saddle Screw with External Tooth Lock Washer	
	LWW	=	Feed Thru Wire Wrap (1.00)	
(L)	Y	=	Feed Thru Solder (.437)	
	YSY	=	Feed Thru Solder (.625)	
	PSB	=	Phil-Slot Brass Screw