


US~WA~PublicationDescription




FGL 118

US~WA~ConnexionVoltageLabel	230 V/ 50 Hz
US~WA~ArmamentLabel	1 x compact fluorescent lamp TC-L 18 W neutral white
US~WA~OperationToolLabel	conventional ballast
US~WA~MainCircuitConnectionLabel	approx. 3 m; shock-proof plug
US~WA~LightCaseLabel	
US~WA~LightCaseMaterialLabel	plastic
US~WA~LightArmLabel	
US~WA~LightArmMaterialLabel	steel tube
US~WA~LightArmSurfaceLabel	painted
US~WA~LightArmShapeLabel	I
US~WA~LightFootLabel	
US~WA~LightFootShapeLabel	I
US~WA~WeightLabel	US~WA~approx 4,1 kg
US~WA~fasteningLabel	table clamp (accessory)-wall bracket (accessory)
US~WA~illuminanzLabel	switchable
US~WA~switchLabel	US~WA~switch
US~WA~LightCoverLabel	US~WA~LightCover
US~WA~ProtectionClassLabel	US~WA~ProtectionClass
US~WA~LightCaseColorLabel	light grey
US~WA~LightArmColorLabel	US~WA~LightArmColor
US~WA~MagnifierMeasurementLabel	US~WA~MagnifierMeasurement
US~WA~DioptrienLabel	3
US~WA~MagnifierAddLensLabel	US~WA~MagnifierAddLens
US~WA~SpecialityLabel	US~WA~Speciality, US~WA~Speciality
US~WA~ArticleNoLabel	111711008

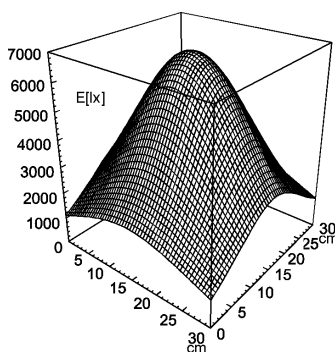

Emin: 1031 lx
Em: 3436 lx
Emax: 6824 lx

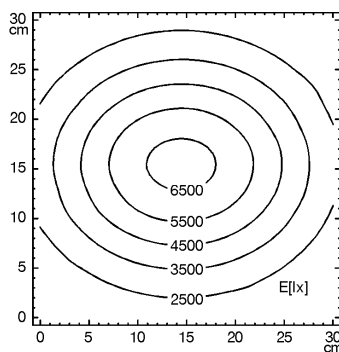

US~WA~MDistanceLabel: d=15cm

