

Customer Information Sheet

DRAWING No.: M80-5000000MI-XX-XXX-00-000

SHEET 3 OF 4

IF IN DOUBT - ASK

(C)

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

SPECIFICATIONS:

MATERIAL:

MOULDING: GLASS FILLED PPS, UL94V-0, BLACK
COAX & POWER CONTACT:
BODY, SLEEVE, INNER CONTACT, END PLUG = COPPER ALLOY
LATCHING COLLAR = BERYLLIUM COPPER
INSULATOR = PTFE
JACKSCREW: STAINLESS STEEL

FINISH:

COAX & POWER CONTACT:
BODY, SLEEVE, INNER CONTACT, END PLUG = GOLD
LATCHING COLLAR = NICKEL

ELECTRICAL:

WORKING VOLTAGE = 120V AC/DC
VOLTAGE PROOF = 360V AC/DC
INSULATION RESISTANCE = 100M Ω MIN

POWER CONTACT:

CONTACT RESISTANCE 6m Ω MAX
CURRENT RATING = M80-335 = 20A MAX WITH 12AWG
M80-336 = 15A MAX WITH 14AWG
M80-337 = 10A MAX WITH 16AWG
M80-338 = 8A MAX WITH 18AWG
M80-339 = 5A MAX WITH 20AWG
CONTACT AS SPECIFIED

COAX CONTACT:

FREQUENCY RANGE = 6GHz
IMPEDANCE = 50 Ω
V.S.W.R = 1.05 + (0.04 x FREQUENCY) GHz MAX
CONTACT RESISTANCE 6 m Ω MAX
INSULATION RESISTANCE = 10⁶M Ω @250V AC
OPERATING VOLTAGE = 180V AC @ 500mA
MAXIMUM VOLTAGE = 1000V AC

MECHANICAL:

DURABILITY = 500 OPERATIONS
COAX & POWER CONTACT:
INSERTION FORCE = 5N MAX
WITHDRAWAL FORCE = 0.5N MIN

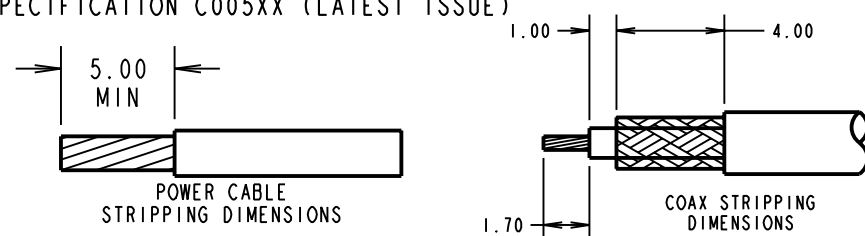
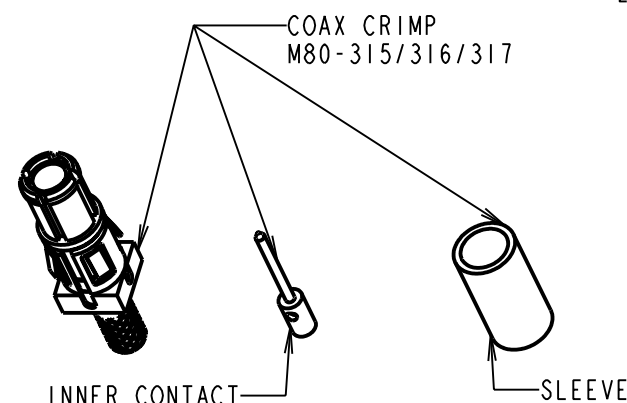
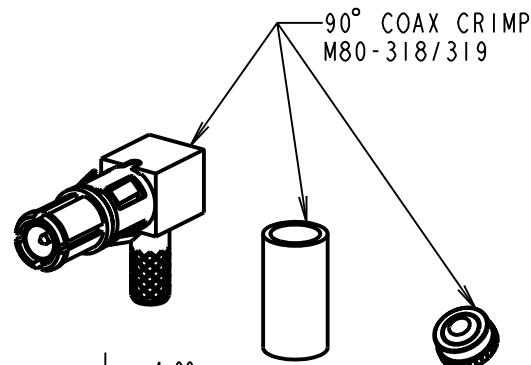
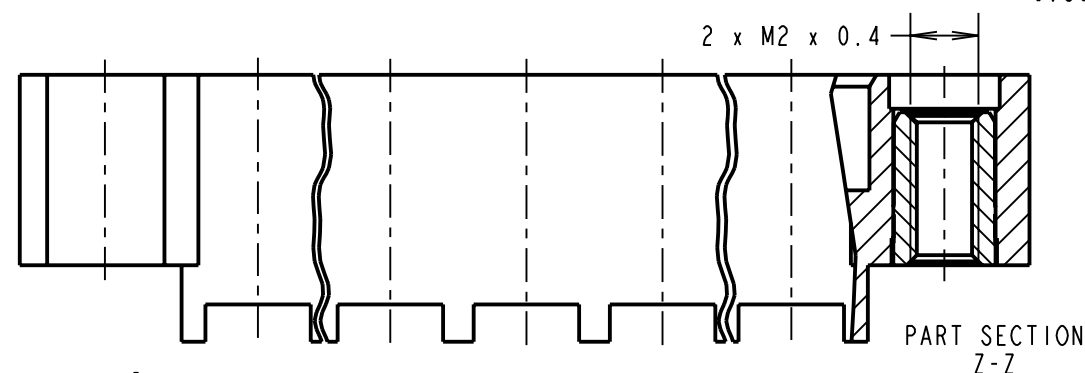
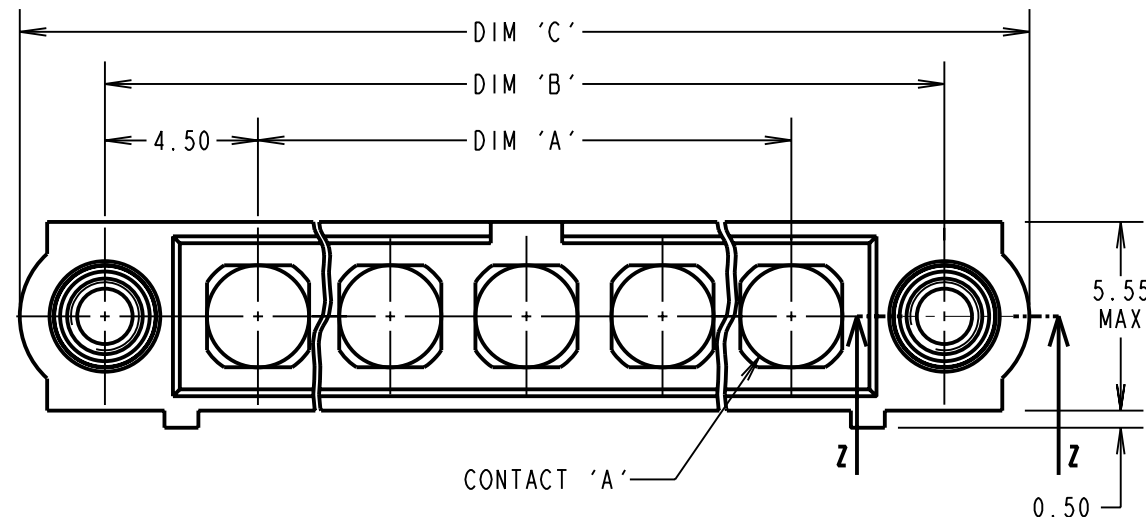
ENVIRONMENTAL:

TEMPERATURE RANGE = -55°C TO +125°C

PACKING:

BAG

FOR COMPLETE SPECIFICATION SEE COMPONENT
SPECIFICATION C005XX (LATEST ISSUE)



DIMENSION	CALCULATION
DIM 'A'	4 x No. OF CONTACTS - 4.00
DIM 'B'	4 x No. OF CONTACTS + 5.00
DIM 'C'	4 x No. OF CONTACTS + 10.00

EXAMPLE 1: CONNECTOR WITH 08 COAX CONTACTS,
M80-5000000MI-08-315-00-000
DIM 'A' = 28.00mm, DIM 'B' = 37.00mm, DIM 'C' = 42.00mm
DIM 'D' = 3.0mm

EXAMPLE 2: CONNECTOR WITH 10 POWER CONTACTS,
M80-5000000MI-10-335-00-000
DIM 'A' = 36.00mm, DIM 'B' = 45.00mm, DIM 'C' = 50.00mm
DIM 'E' = 3.5mm

ORDER CODE: (CRIMP/SOLDER CONTACTS)
M80-5000000MI-XX-XXX-00-000

TOTAL No. OF CONTACTS
02 TO 12

SPECIAL CONTACTS (CRIMP)

315 = COAX CONTACT 2.0mm CRIMP M80-315
316 = COAX CONTACT 2.4mm CRIMP M80-316
317 = COAX CONTACT 2.7mm CRIMP M80-317
318 = COAX CONTACT 2.0mm HORZ' CRIMP M80-318
319 = COAX CONTACT 2.7mm HORZ' CRIMP M80-319
335 = POWER CONTACT 12AWG SOLDER M80-335
336 = POWER CONTACT 14AWG SOLDER M80-336
337 = POWER CONTACT 16AWG SOLDER M80-337
338 = POWER CONTACT 18AWG SOLDER/CRIMP M80-338
339 = POWER CONTACT 20AWG SOLDER/CRIMP M80-339

NOTES:

- CONNECTORS ARE SUPPLIED WITH CONTACTS LOOSE.
- COAX CONTACT IS SUPPLIED AS A KIT OF PARTS: BODY, MAIN INSULATOR, INNER CONTACT AND LATCHING COLLAR ARE PRE-ASSEMBLED AND SLEEVE AND INSULATED END PLUG ASSEMBLY ARE SEPARATE.
- FOR EXTRA COAX CONTACTS, USE PART NUMBERS M80-315/316/317/318/319.
- FOR EXTRA POWER CONTACTS USE PART NUMBERS M80-335/336/337/338/339
- COAX & POWER CONTACT EXTRACTION TOOL = Z80-290
- RECOMMENDED HAND CRIMP TOOL FOR CONTACTS 338/339 = Z80-294 AND POSITIONER Z80-295.
- RECOMMENDED HAND CRIMP TOOL FOR INNER COAX CONTACT = Z80-292 WITH POSITIONER Z80-291. RECOMMENDED HAND CRIMP TOOL AND DIE SET FOR SLEEVE = Z80-293.
- INSTRUCTION SHEETS ARE AVAILABLE.

HARWIN

HARWIN USA
TEL: 603 893 5376
FAX: 603 893 5396
mis@harwin.com

HARWIN Europe (UK)
TEL: 023 9231 4545
FAX: 023 9231 4590
mis@harwin.co.uk

HARWIN Asia
TEL: +65 6 779 4909
FAX: +65 6 779 3868
mis@harwin.com.sg

THIS DRAWING AND ANY
INFORMATION OR DESCRIPTIVE
MATTER SET OUT HEREON ARE
CONFIDENTIAL AND COPYRIGHT
PROPERTY OF THE HARWIN
GROUP AND MUST NOT BE
DISCLOSED, LOANED, COPIED
OR USED FOR MANUFACTURING,
TENDERING OR FOR ANY
OTHER PURPOSE WITHOUT
THEIR WRITTEN PERMISSION.

TOLERANCES
X. = ± 1 mm
X.X = ± 0.25 mm
X.XX = ± 0.10 mm
X.XXX = ± 0.01 mm
ANGLES = $\pm 5^\circ$
UNLESS STATED

MATERIAL:

SEE ABOVE

FINISH: SEE ABOVE

S/AREA: mm²

TITLE:

DATAMATE MIX-TEK
MALE ASSEMBLY
WITH JACKSCREW

DRAWING NUMBER:

M80-5000000MI-XX-XXX-00-000

SHT
3 OF 4

SB	3	13.05.11	11275
NAME	ISS.	DATE	C/NOTE
APPROVED:	S.BENNETT		
CHECKED:	MARK.G.PLESTED		
DRAWN:	R.ADDE		
CUSTOMER REF.:			
ASSEMBLY DRG:			

Customer Information Sheet

DRAWING No.: M80-5000000MI-XX-XXX-00-000

SHEET 4 OF 4

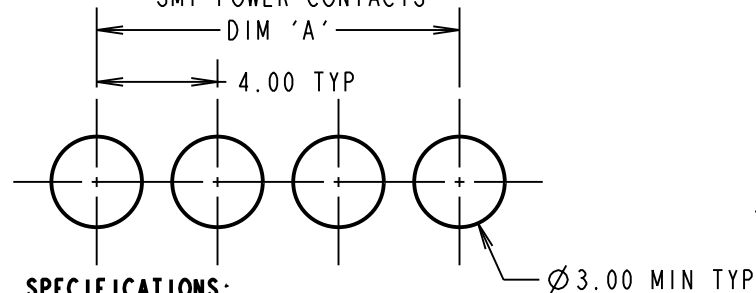
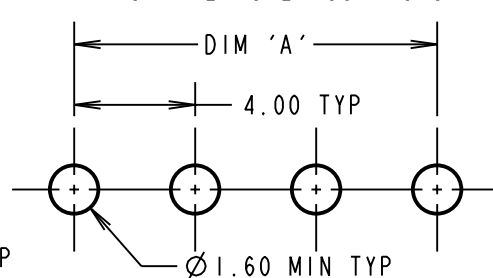
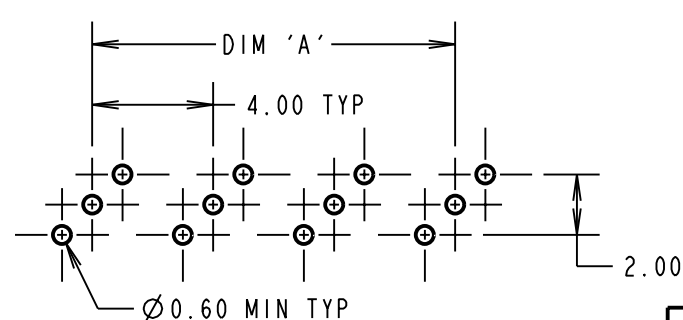
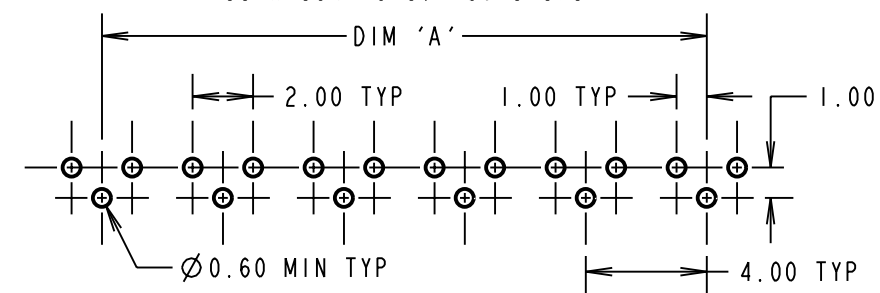
IF IN DOUBT - ASK

(C)

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

RECOMMENDED PCB LAYOUT FOR ALL
SMT POWER CONTACTSRECOMMENDED PCB LAYOUT FOR ALL
PC TAIL POWER CONTACTSRECOMMENDED PCB LAYOUTS FOR
COAX CONTACTS: M80-311/312RECOMMENDED PCB LAYOUTS FOR
COAX CONTACTS: M80-313/314**SPECIFICATIONS:****MATERIAL:**

MOULDING: GLASS FILLED PPS, UL94V-0, BLACK

COAX & POWER CONTACT:

BODY, INNER CONTACT, = COPPER ALLOY

INSULATOR = PTFE

JACKSCREW: STAINLESS STEEL

FINISH:

COAX & POWER CONTACT:

BODY, INNER CONTACT, = GOLD

ELECTRICAL:

WORKING VOLTAGE = 120V AC/DC

VOLTAGE PROOF = 360V AC/DC

INSULATION RESISTANCE = 100MΩ MIN

POWER CONTACT:

CONTACT RESISTANCE 6mΩ MAX

CURRENT RATING = 20A MAX

COAX CONTACT:

FREQUENCY RANGE = 6GHz

IMPEDANCE = 50 Ω

V.S.W.R = 1.05 + (0.04 x FREQUENCY) GHz MAX

CONTACT RESISTANCE 6 mΩ MAX

INSULATION RESISTANCE = 10⁶MΩ @250V AC

OPERATING VOLTAGE = 180V AC @ 500mA

MAXIMUM VOLTAGE = 1000V AC

MECHANICAL:

DURABILITY = 500 OPERATIONS

COAX & POWER CONTACT:

INSERTION FORCE = 5N MAX

WITHDRAWAL FORCE = 0.5N MIN

ENVIRONMENTAL:

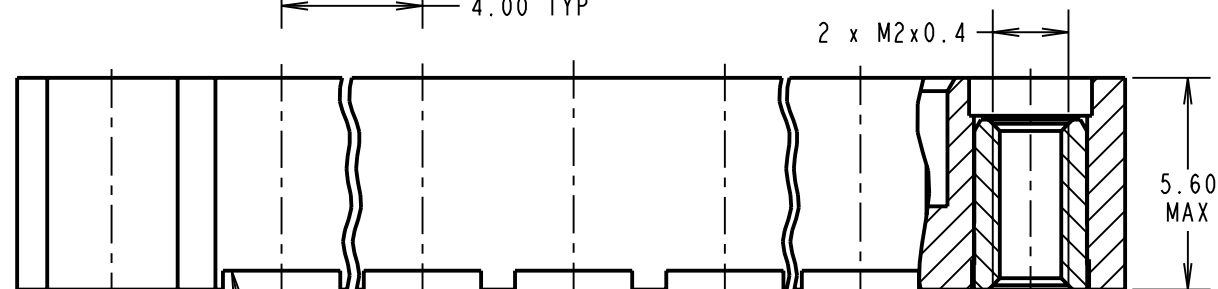
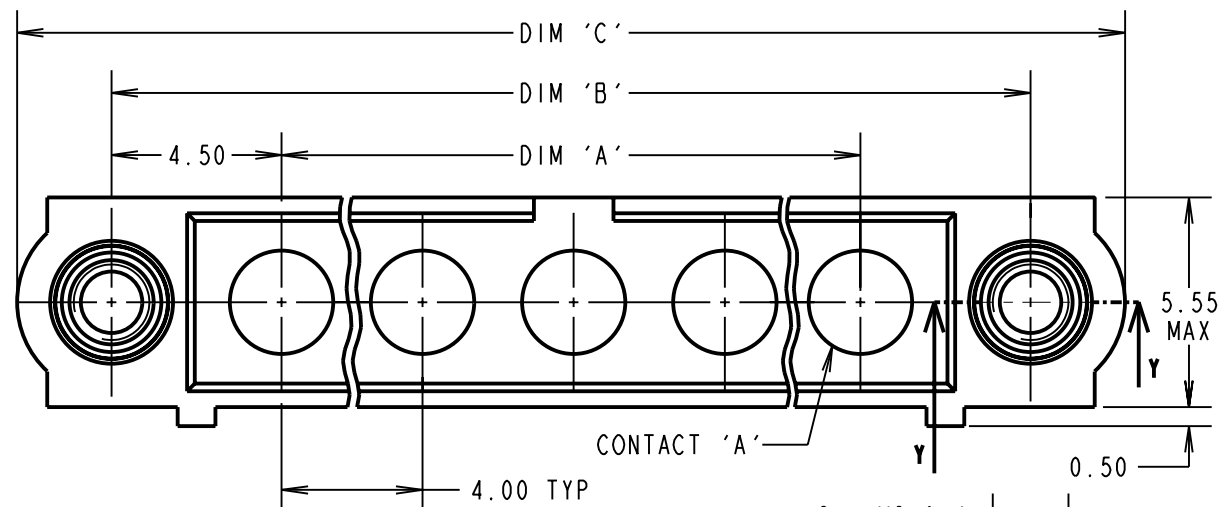
TEMPERATURE RANGE = -55°C TO +125°C

PACKING:

TUBE

FOR COMPLETE SPECIFICATION SEE COMPONENT

SPECIFICATION C005XX (LATEST ISSUE)

PART SECTION
Y-YVIEW OF
COAX CONTACT

INSULATOR

BODY

PIN

ORDER CODE: (PC TAIL CONTACTS ONLY)

M80-5000000MI-XX-XXX-00-000TOTAL No. OF CONTACTS
02 TO 12**SPECIAL CONTACTS (PC TAIL)**

311 = COAX CONTACT 3.0mm PC TAIL M80-311

312 = COAX CONTACT 4.5mm PC TAIL M80-312

313 = COAX CONTACT 3.0mm HORZ' PC TAIL M80-313

314 = COAX CONTACT 4.5mm HORZ' PC TAIL M80-314

331 = POWER CONTACT 3.5mm VERT' PC TAIL M80-331

332 = POWER CONTACT 5.0mm VERT' PC TAIL M80-332

333 = POWER CONTACT 3.0mm HORZ' PC TAIL M80-333

33A = POWER CONTACT HORZ' SMT M80-33A

334 = POWER CONTACT 4.5mm HORZ' PC TAIL M80-334

HARWINHARWIN USA
TEL: 603 893 5376
FAX: 603 893 5396
mis@harwin.comHARWIN Europe (UK)
TEL: 023 9231 4545
FAX: 023 9231 4590
mis@harwin.co.ukHARWIN Asia
TEL: +65 6 779 4909
FAX: +65 6 779 3868
mis@harwin.com.sgTHIS DRAWING AND ANY
INFORMATION OR DESCRIPTIVE
MATTER SET OUT HEREON ARE
CONFIDENTIAL AND COPYRIGHT
PROPERTY OF THE HARWIN
GROUP AND MUST NOT BE
DISCLOSED, LOANED, COPIED
OR USED FOR MANUFACTURING,
TENDERING OR FOR ANY
OTHER PURPOSE WITHOUT
THEIR WRITTEN PERMISSION.**TOLERANCES**

X. = ±1mm

X.X = ±0.25mm

X.XX = ±0.10mm

X.XXX = ±0.01mm

ANGLES = ±5°

UNLESS STATED

MATERIAL:

SEE ABOVE

FINISH:

SEE ABOVE

S/AREA:mm²**TITLE:**DATAMATE MIX-TEK
MALE ASSEMBLY
WITH JACKSCREW**DRAWING NUMBER:****M80-5000000MI-XX-XXX-00-000**SHT
4 OF 4**DIMENSION** **CALCULATION**

DIM 'A' 4 x No. OF CONTACTS - 4.00

DIM 'B' 4 x No. OF CONTACTS + 5.00

DIM 'C' 4 x No. OF CONTACTS + 10.00

DIM 'D' M80-311 = 3.0mm, M80-312 = 4.5mm

DIM 'E' M80-313 = 3.0mm, M80-314 = 4.5mm

DIM 'F' M80-331 = 3.5mm, M80-332 = 5.0mm

DIM 'G' M80-333 = 3.0mm, M80-334 = 4.5mm

EXAMPLE 1: CONNECTOR WITH 08 COAX CONTACTS,

M80-5000000MI-08-313-00-000

DIM 'A' = 28.00mm, DIM 'B' = 37.00mm, DIM 'C' = 42.00mm

DIM 'D' = 3.0mm

EXAMPLE 2: CONNECTOR WITH 10 POWER CONTACTS,

M80-5000000MI-10-334-00-000

DIM 'A' = 36.00mm, DIM 'B' = 45.00mm, DIM 'C' = 50.00mm

DIM 'E' = 3.5mm

SB 3 13.05.11 11275

NAME ISS. DATE C/NOTE

APPROVED: S.BENNETT

CHECKED: MARK.G.PLESTED

DRAWN: R.ADDE

CUSTOMER REF.:

ASSEMBLY DRG: