### SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN HET:

UL RECOGNIZED: UL 1283

CSA CERTIFIED: CSA C22.2 No. 8 PENDING VDE APPROVED: EN 60939-2 PENDING

### OPERATING SPECIFICATIONS

LINE CURRENT/VOLTAGE: 20 AMP, 120/250 VAC,

20 AMP/40°C, 250 VAC

LINE FREQUENCY:

50-60Hz

MAXIMUM LEAKAGE CURRENT.

EACH LINE TO GROUND:

2μ AMP @ 120V 60Hz 5д АМР @ 250V 50Hz

OPERATING AMBIENT TEMP. RANGE: -10°C TO +40°C @ RATED CURRENT, In.

IN AN AMBIENT, Tq. HIGHER THAN 40°C, THE MAXIMUM OPERATING CURRENT, Iq. IS AS FOLLOWS: I  $_{\rm I}$  = I  $_{\rm I}$   $_{\rm I}$   $_{\rm I}$   $_{\rm I}$ 

<u>85 - Ta</u>  $I_0 = I_r$ 

# RELIABILITY SPECIFICATIONS:

STORACE TEMPERATURE: -40°C TO +85°C HUMIDITY: 21 DAYS @ 40°C 95% RH. CURRENT OVERLOAD TEST: 6 TIMES In FOR 8 SECONDS

#### CUSTOMER DRAWING CATALOG # 20EH1 ECN# APPRVD DATE 13-007605 TAM 06MAY13

# TEST SPECIFICATIONS:

INDUCTANCE: .44 mH NOMINAL

CAPACITANCE: (MEASURED @ 1KHz. 0.250VAC MAX., 25°C±1°C)

NA μF±20% .009 μF±20% LINE TO GROUND: LINE TO LINE:

DISCHARGE RESISTOR: 1.5 HA

L/G AND L/L 1.R.

NO DISCHARGE RESISTOR: 6000MA (MIN.) @ 100VDC,


20°C AND 50% RH

### RECOMMENDED RECEIVING INSPECTION HIPOT:

LINE TO GROUND: 1500 VAC FOR 1 MINUTE LINE TO LINE: 1450 VDC FOR 1 MINUTE

# FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

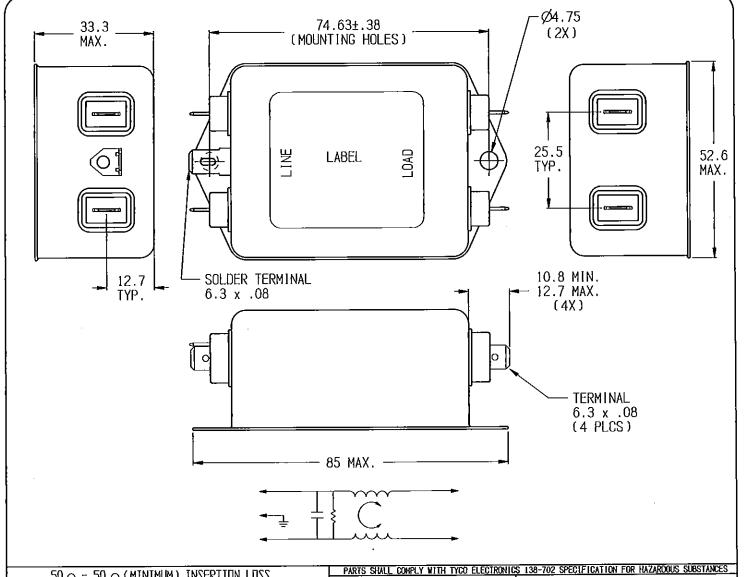

50 ~ - 50 ~ (MINIMUM) INSERTION LOSS PREGLENCY .15 .5 1.0 5.0 10 30 COMMON 10 20 21 15 15 15 ďθ DIFF. 30 l ďΒ THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TWO BESTONIOS CORPORATION AND ITS WORDWIDE SUSSIDIARIES AND AFFILIATES. IT WAY NOT SEE DISCUSSED TO ANYONE OTHER THAN TWO BESTRONICS PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM TYPO BESTRONICS CORPORATION. SHET ST (0 20EHJ-A. ekd

UNLESS OTHERWISE SPECIFIED
TOLERANCE TO BE ±0.64
MATERIAL & FINISH: AS SUPPLIED
DIMENSIONS IN MILLIMETERS NOTES:

TE TE Connectivity

POWER LINE FILTER

TE PART ND.: 3-1609037-8 1:1 26APR13

DRIE: LJO

20EH1

A