

MICRO SWITCH

FREEPORT, ILLINOIS U S A
A DIVISION OF HONEYWELL

FED. MFG CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
BZE6-RQ2X2

M

BZE6-RQ2X2

M

DRAWING
NUMBER

ISSUE
11

REPLACES

29AUG07

PSR

CHECK

77

31 AUG 77

ROB

CHECK

77

14 SEP 92

E

31 AUG 93

F

5 MAR 97


G

10 NOV 05

H

29AUG07

RASTER
DRAWN

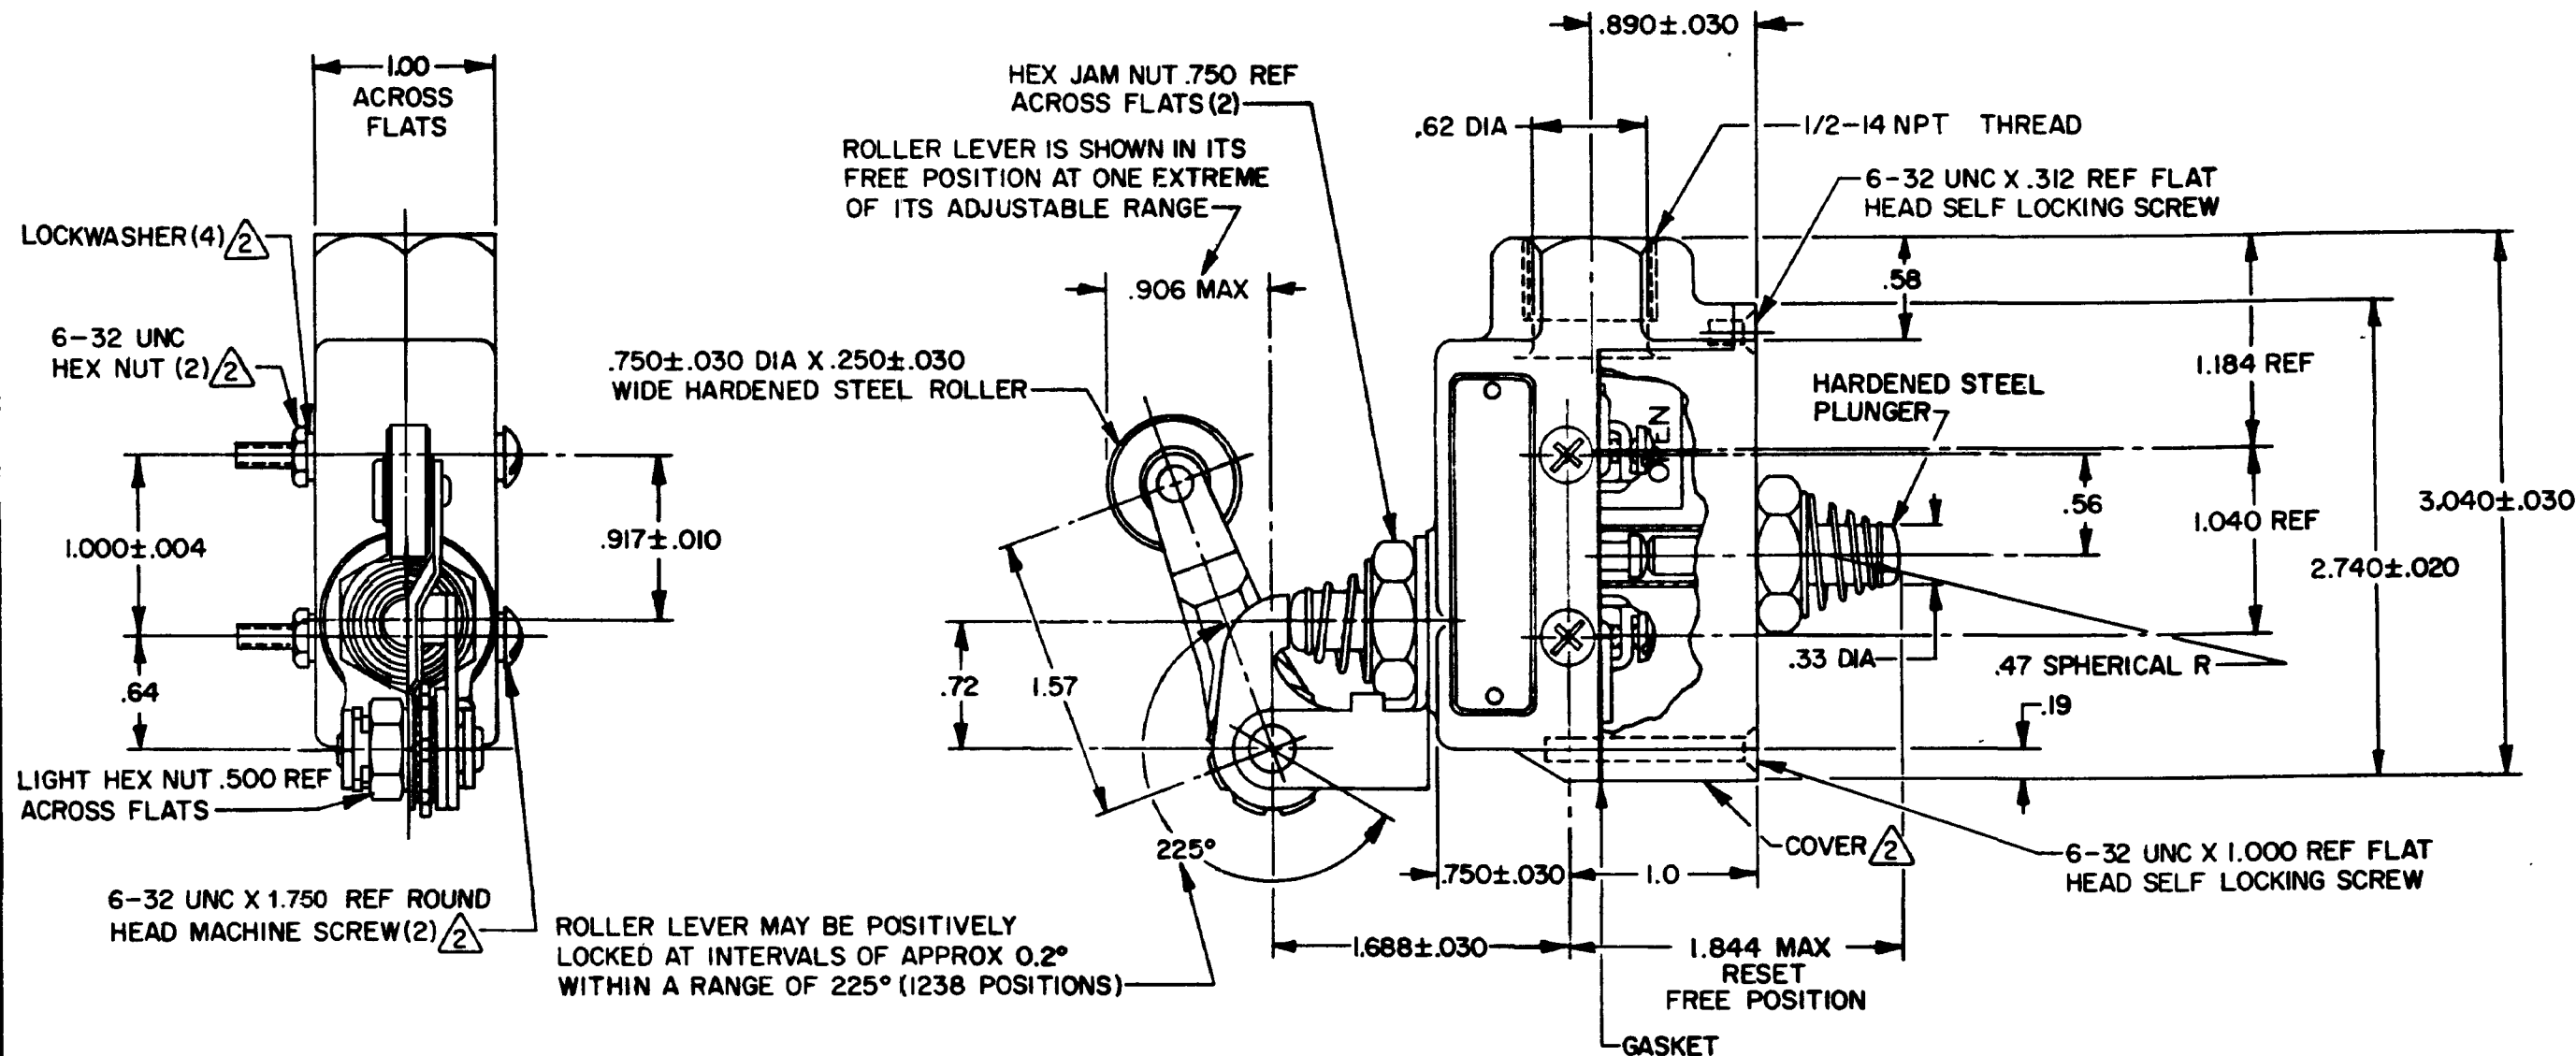

NOTES-

- 1 - 6-32 UNC X .218 REF BINDING HEAD TERMINAL SCREW (3)
- 2 - FURNISHED UNASSEMBLED
- 3 - ROLLER LEVER BRACKET MAY BE SET AT ANY ONE OF EIGHT POSITIONS SPACED 45° APART
- 4 - SEAL RATING: NEMA 1 IP40

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		
CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE — 3/4 LB APPROX	CONTACT ARRANGEMENT	DO NOT SCALE PRINT
OVERTRAVEL — .219 MIN	S P D T MAINTAINED CONTACT	UNLESS OTHERWISE NOTED
PRETRAVEL — .188 MAX	15A-125, 250 OR 480 VAC	DIMENSIONS ARE IN INCHES
RESET CHARACTERISTICS	1/4 HP-125 VAC; 1/2 HP-250 VAC	TOLERANCES ARE:
OPERATING FORCE — 8 OZ MIN	1/2A-125 VDC; 1/4A-250 VDC	ONE PLACE (0) ±.030
BASIC SWITCH REPLACEMENT — BZ-RQX68	CODE L67	TWO PLACE (.00) ±.015
	CE 1.5A, 240 Vac	THREE PLACE (.000) ±.005
		ANGLES ±
		WEIGHT .77 LB