


**Notes:**

1. Only RoHS Compliant Processes and Materials used for this assembly.
2. Marking includes "ConductRF", Part No. "TESTeCON", & Serial No., Black Text.
3. Mark Shrink Tube on both connectors ends with "DC-18GHz" & Range
4. Single Centered Marker up to 15'(4.5M), Two Markers 12"(30cm) from ends for lengths over 15'(4.5M)
5. Serial No. to be Marked as Cxxxxx, where xxxxx = sequential no. from log.
5. 100% Tested DC to 18GHz, Plotted Data supplied with assembly.
6. Cables to be Coiled and Placed in Plain Bag with ConductRF Label. (See Separate Label Instructions)


## TESTeCON Phase Stable RF Test Cable

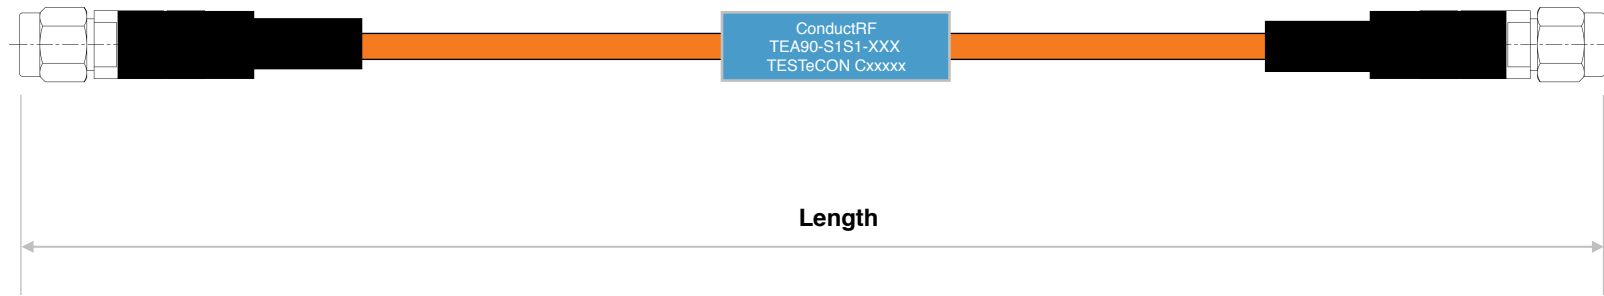

XXX	Length	Max Insertion Loss(dB)
		DC to 18GHz
F02	2ft	2.199
F03	3ft	3.135
S42	42inches	3.603
F04	4ft	4.071
F05	5ft	4.780
F06	6ft	5.943
1M0	1 Meter	3.243
VSWR(max)		1.35:1

Part No. Configurator - XXX

FXX = Length in Feet (eg F03=3ft)  
 SXX = Length in Inches (eg S18=18")  
 XMx = Length in Meters (eg 2M5=2.5m)  
 CXX = Length in CM (eg C50=50cm)

					Customer DWG	Title: TESTeCON 18GHz Cable SMA Male to SMA Male - Serialized				
					Remarks:	Originated: 02/24/15	Conduct RF sales@ConductRF.com Tel: +1 978 374 6840	Range: TEA	Sheet 1 of 1	
								Dwg Ref: TEA90-S1S1		
1	Pre-Release		DG	10/19/16	Tolerances: Length +/-2%	Checked: JW	Approved: PL	Rev: 1	Part No: <b>TEA90-S1S1-XXX</b>	
REV.	DESCRIPTION	ECN	DRAWN	DATE						
REVISION HISTORY										