


Notes:

1. Only RoHS Compliant Processes and Materials used for this assembly.
2. Marking to Contain "ConductRF", Part No. & Date Code, BLACK text on WHITE Shrink Tube
3. Mark ORANGE Shrink Tube on both connectors ends with "DC-18GHz" & Connector Series
4. Sweep Tested for DC to 18GHz, Store Hi-Point Data.
5. Caps to be Fitted Prior to Packaging
6. Cables to be Coiled and Placed in Anti-Static Bag with ConductRF Label.

TESTeCON Los Loss RF Test Cable

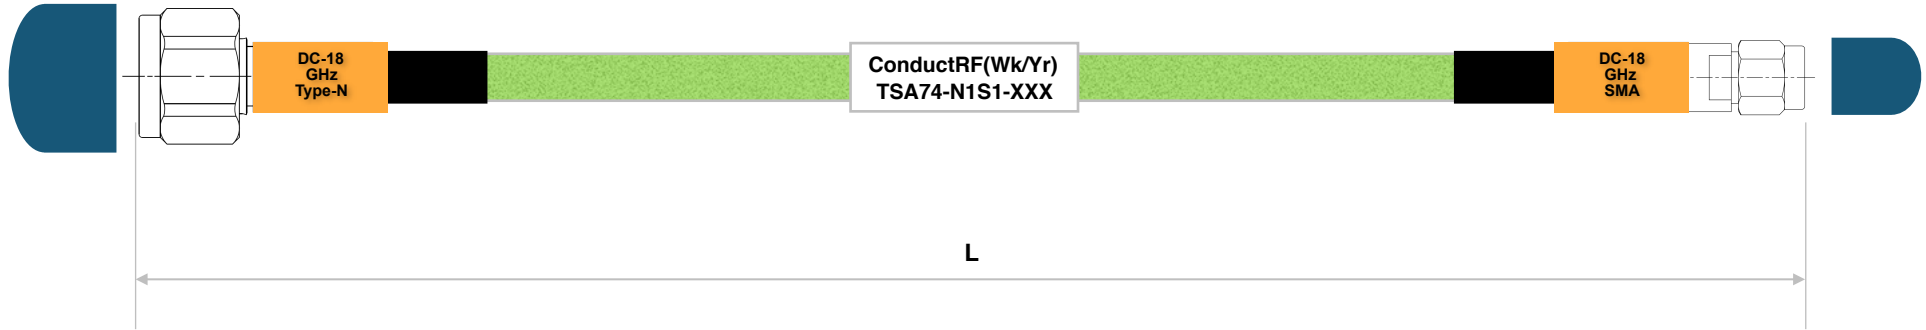

		Max Insertion Loss(dB)		
L	XXX	6GHz	12GHz	18GHz
2ft	F02	0.548	0.787	0.976
4ft	F04	0.920	1.327	1.649
5ft	F05	1.107	1.597	1.986
6ft	F06	1.293	1.867	2.322
10ft	F10	2.038	2.946	3.669
12ft	F12	2.411	3.486	4.342
20ft	F20	3.901	5.645	7.034
1M	1M0	0.786	1.133	1.407
VSWR(max)		1.35:1		

ConductRF(Wk/Yr)
TSA74-N1S1-XXX

Marker Example

Part No. Configurator - XXX

FXX = Length in Feet (eg F03=3ft)
 SXX = Length in Inches (eg S18=18")
 XMX = Length in Meters (eg 2M5=2.5m)
 CXX = Length in CM (eg C50=50cm)

					Customer DWG	Title: SMA Male to N Male, 18GHz Low Loss Flexible Test Cable				
					Remarks:	Originated: 03/03/14	Conduct RF sales@ConductRF.com Tel: +1 978 374 6840	Range: TSA74		Sheet 1 of 1
								Dwg Ref: TSA74-N1S1		
1	Pre-Release		DG	04/01/16						
REV.	DESCRIPTION	ECN	DRAWN	DATE	Tolerances: Length +/-2%	Checked: JW	Approved: PL	Rev: 1	Part No: TSA74-N1S1-XXX	
REVISION HISTORY										