


Notes:

1. Only RoHS Compliant Processes and Materials used for this assembly.
2. Marking includes "ConductRF", Part No. & Serial No., Black Text.
3. Mark Shrink Tube on both connectors ends with "DC-9GHz"
4. Single Centered Marker up to 15'(4.5M), Two Markers 12"(30cm) from ends for lengths over 15'(4.5M)
5. Serial No. to be Marked as Cxxxxx, where xxxxx = sequential no. from log.
5. 100% Tested DC to 9GHz, Plotted Data supplied with assembly.
7. Caps to be Fitted Prior to Packaging
8. Cables to be Coiled and Placed in Anti-Static Bag with ConductRF Label.(See Separate Label Instruction)


Site-Flex Phase Stable Rugged RF Test Cable

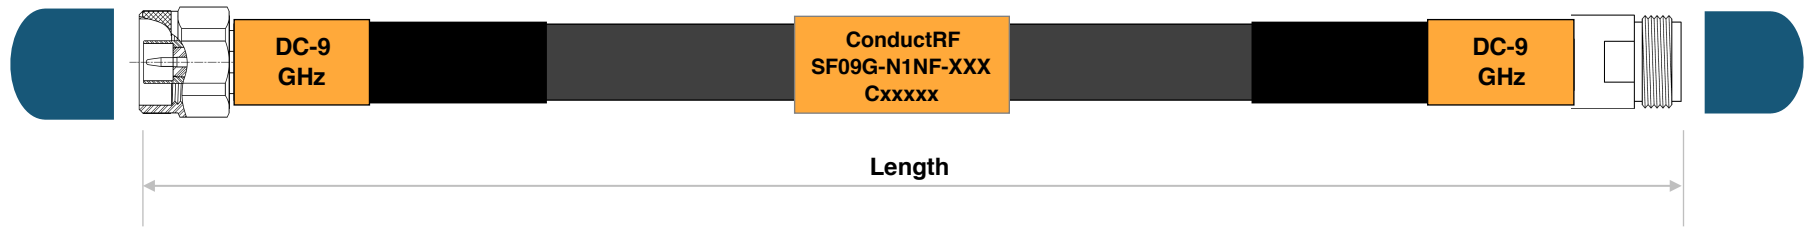

XXX	Length	Max Insertion Loss(dB)		
		3GHz	6GHz	9GHz
1M0	1M	0.908	1.356	1.729
F03	3ft	0.841	1.256	1.601
F05	5ft	1.317	1.973	2.521
F08	8ft	2.031	3.049	3.901
F10	10ft	2.507	3.766	4.821
F12	12ft	3.696	5.560	7.121
VSWR(max)		1.20:1		

Part No. Configurator - XXX

FXX = Length in Feet (eg F03=3ft)
 SXX = Length in Inches (eg S18=18")
 XMX = Length in Meters (eg 2M5=2.5m)
 CXX = Length in CM (eg C50=50cm)

					Customer DWG	Title: Site-Flex - Type-N Male to Type-N Female - DC-9GHz				
					Remarks:	Originated: 02/19/16	Conduct RF sales@ConductRF.com Tel: +1 978 374 6840	Range: SF	Sheet 1 of 1	
								Dwg Ref: SF09G-N1NF		
1	Pre-Release		DG	10/18/16	Tolerances: Length +/-2%	Checked: JW	Approved: PL	Rev: 1	Part No: SF09G-N1NF-XXX	
REV.	DESCRIPTION	ECN	DRAWN	DATE	REVISION HISTORY					