


Notes:

1. Only RoHS Compliant Processes and Materials used for this assembly.
2. Marking includes "ConductRF", Part No. & Serial No., Black Text.
3. Mark Shrink Tube on both connectors ends with "DC-27GHz"
4. Single Centered Marker up to 15'(4.5M), Two Markers 12"(30cm) from ends for lengths over 15'(4.5M)
5. Serial No. to be Marked as Cxxxxx, where xxxxx = sequential no. from log.
5. 100% Tested DC to 27GHz, Plotted Data supplied with assembly.
7. Caps to be Fitted Prior to Packaging
8. Cables to be Coiled and Placed in Bag with ConductRF Label.(See Separate Label Instruction)


Site-Flex Phase Stable Rugged RF Test Cable

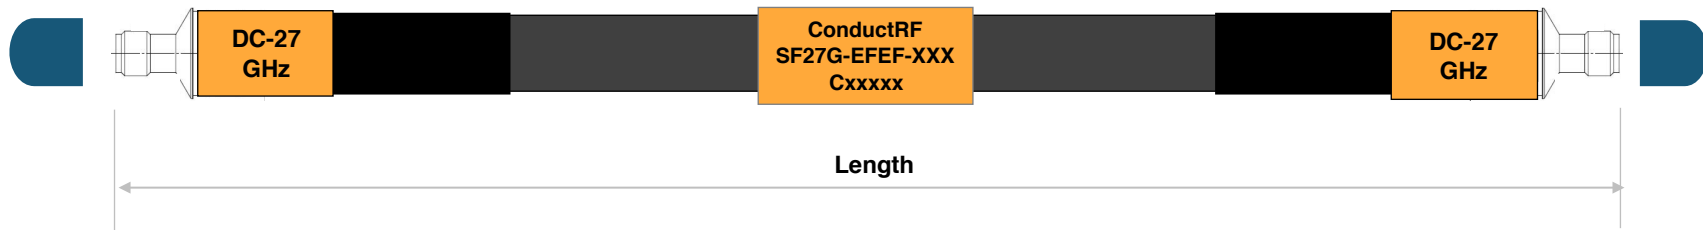

XXX	Length	Max Insertion Loss(dB)		
		12GHz	18GHz	27GHz
1M0	1M	2.063	2.664	3.467
F03	3ft	1.909	2.463	3.204
F05	5ft	3.012	3.897	5.085
F08	8ft	4.666	6.048	7.907
F10	10ft	5.769	7.482	9.788
F12	12ft	6.872	8.916	11.669
VSWR(max)		1.30:1		

Part No. Configurator - XXX

FXX = Length in Feet (eg F03=3ft)
 SXX = Length in Inches (eg S18=18")
 MXM = Length in Meters (eg 2M5=2.5m)
 CXX = Length in CM (eg C50=50cm)

					Customer DWG	Title: Site-Flex - 3.5mm Female to 3.5mm Female - DC-27GHz			
					Remarks:	Originated: 02/19/16	Conduct RF sales@ConductRF.com Tel: +1 978 374 6840	Range: SF	
1	Pre-Release		DG	10/18/16				Dwg Ref: SF27G-EFEF	
REV.	DESCRIPTION	ECN	DRAWN	DATE	Tolerances: Length +/-2%	Checked: JW	Approved: PL	Rev: 1	Part No: SF27G-EFEF-XXX
REVISION HISTORY									