


Notes:

1. Only RoHS Compliant Processes and Materials used for this assembly.
2. Marking to Contain "ConductRF", Part No. & Serial No.,
3. Marker to be Black Text on White Label.
4. Sweep Tested for DC to 70GHz, Plot Data and Store.
5. Serial No. to be Marked as Cxxxxx, where xxxxx = sequential no. from log.
6. Caps to be Fitted Prior to Packaging
7. Cables to be Coiled and Placed in Anti-Static Bag with ConductRF Plotted Data & Label.

ConductRF
PFW81-BNFB1-XXX
S/N - Cxxxxx

Marker Example

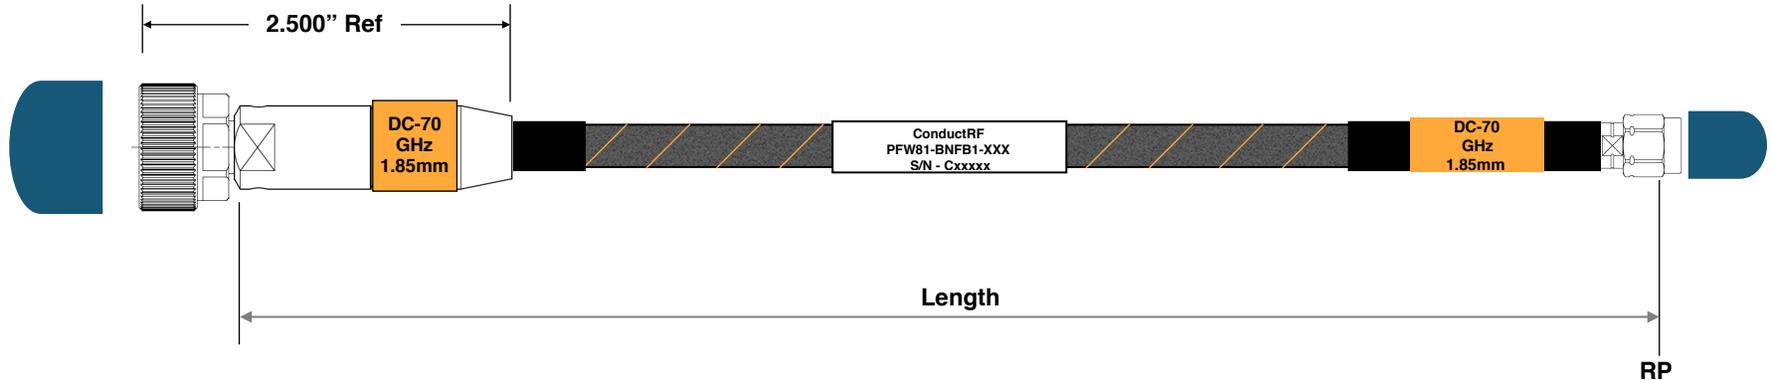

L	XXX	Max Insertion Loss(dB)		
		40GHz	50GHz	70GHz
2ft	F02	3.556	4.020	4.847
4ft	F04	6.531	7.391	8.927
L	XXX	40GHz	50GHz	70GHz
0.5M	0M5	3.020	3.413	4.113
1M	1M0	5.460	6.177	7.458
VSWR (Max)		1.40:1		

Part No. Configurator - XXX

FXX = Length in Feet (eg F03=3ft)
 SXX = Length in Inches (eg S18=18")
 XMX = Length in Meters (eg 2M5=2.5m)
 CXX = Length in CM (eg C50=50cm)

REV.	DESCRIPTION	ECN	DRAWN	DATE	Tolerances: Length +/-2%	Checked: JW	Approved: PL	Rev: 2	Part No: PFW81-BNFB1-XXX	
REVISION HISTORY					Customer DWG		Title: Hi-Flex VNA Cable 70GHz - 1.85mm NMD Female to 1.85mm Male			
2	Updated NMD Head Graphic		DG	02/10/17	Remarks:	Originated: 01/05/16	Conduct RF sales@ConductRF.com Tel: +1 978 374 6840	Range: HFVNA		Sheet 1 of 1
1	Pre-Release		DG	10/20/16		Dwg Ref: PFW81-BNFB1				