


**Notes:**

1. Only RoHS Compliant Processes and Materials used for this assembly.
2. Marking includes "ConductRF", Part No. & Serial No., Black Text.
3. Mark Shrink Tube on both connectors ends with "DC-7GHz"
4. Single Centered Marker up to 15'(4.5M), Two Markers 12"(30cm) from ends for lengths over 15'(4.5M)
5. Serial No. to be Marked as Cxxxxx, where xxxxx = sequential no. from log.
5. 100% Tested DC to 7GHz, Plotted Data supplied with assembly.
7. Caps to be Fitted Prior to Packaging
8. Cables to be Coiled and Placed in Bag with ConductRF Label.(See Separate Label Instruction)


## Site-Flex Phase Stable Rugged RF Test Cable

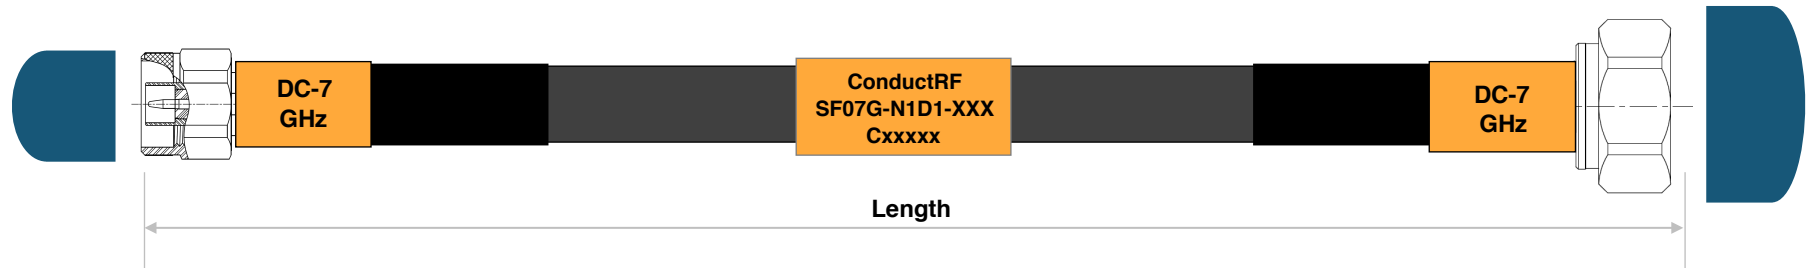

XXX	Length	Max Insertion Loss(dB)		
		1GHz	3GHz	7GHz
1M0	1M	0.494	0.908	1.487
F03	3ft	0.458	0.841	1.376
F05	5ft	0.714	1.317	2.164
F08	8ft	1.099	2.031	3.346
F10	10ft	1.355	2.507	4.134
F12	12ft	1.611	2.983	4.921
VSWR(max)		1.20:1		

Part No. Configurator - XXX

FXX = Length in Feet (eg F03=3ft)  
 SXX = Length in Inches (eg S18=18")  
 XMX = Length in Meters (eg 2M5=2.5m)  
 CXX = Length in CM (eg C50=50cm)

					Customer DWG	Title: <b>Site-Flex - Type-N Male to DIN 7/16 Male - DC-7GHz</b>					
					Remarks:	Originated:	Conduct RF sales@ConductRF.com Tel: +1 978 374 6840	Range: SF	Sheet 1 of 1		
						Dwg Ref: SF07G-N1D1					
2	Corrected Loss No's			DG	03/03/17	Tolerances: Length +/-2%		Checked: JW	Approved: PL	Rev: 2	Part No: <b>SF07G-N1D1-XXX</b>
1	Pre-Release			DG	10/18/16						
REV.	DESCRIPTION	ECN	DRAWN	DATE							
REVISION HISTORY											