


PUSH-WIRE CONNECTOR FOR JUNCTION BOXES 3-CONDUCTOR TERMINAL BLOCKS PUSH-WIRE® CONNECTION


PDF DATASHEET

© 1992 - 2011 CADENAS GmbH







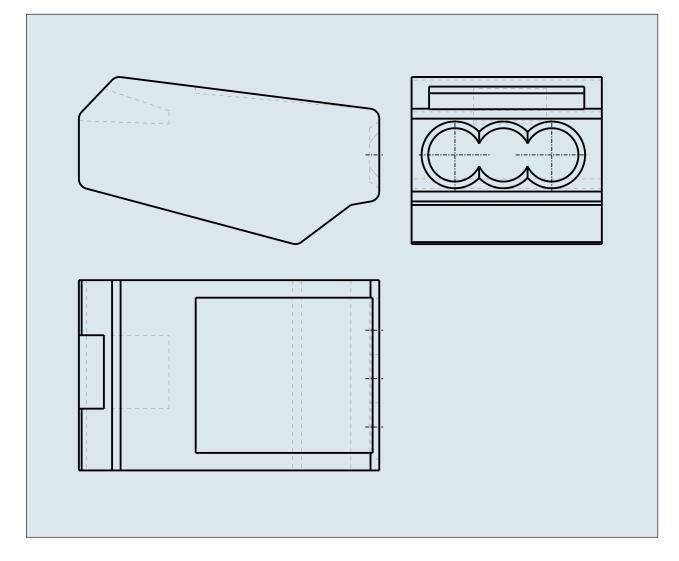



273-100

PUSH-WIRE CONNECTOR FOR JUNCTION BOXES 3-CONDUCTOR TERMINAL BLOCKS PUSH-WIRE® CONNECTION

PDF DATASHEET

© 1992 - 2011 CADENAS GmbH

ITEM-NO. (ITEM-NO.)	273-100
Cross section1 (Cross section / mm²)	3 x 0.75 - 1.5
Cross section2 (Cross section / AWG)	3 x 18 - 16
Strip length (Strip length / mm)	10 - 13
Measured voltage (Measured voltage / V)	400
Measured shock voltage (Measured shock voltage / kV)	4
Pollution degree (Pollution degree)	2
Current intensity (Current intensity / A)	18
P (NO. OF POLES)	3
Height (Height / mm)	8.6
Width (Width / mm)	11.5
Depth (Depth / mm)	18
No. of connection Points (No. of connection Points)	3
No. of potentials (No. of potentials)	1
COLOR (COLOR)	grau
WEIGHT (WEIGHT / g)	1.9