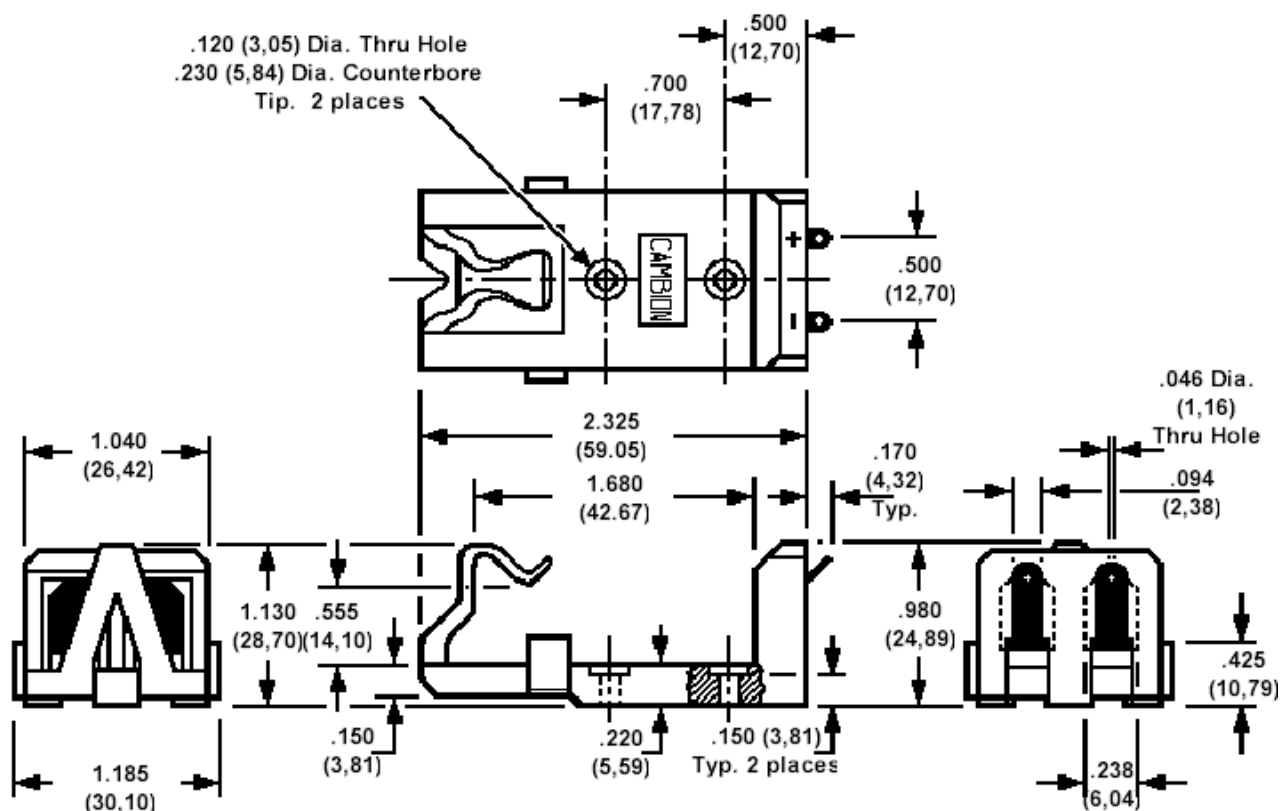


**400-1800, "PP3" size Battery Holder - Solder tag connection**

Rec. Mounting Holes - .062 (1,57) Dia., on pitch of 0.500 (12,70) centres, plus bolt down holes per drawing  
Suited for use on boards up to .125 (3,18) thick

**How to order code****400-1800-01-00-20****Basic Part No****FEATURES**

Single Piece Construction

Requires No Snap on Battery Connection

Shockproof Battery Retention

**BATTERY INSERTION/REMOVAL PROCEDURE**

|                  |  |
|------------------|--|
| <b>Insertion</b> | Pull back moulded clip part of holder, and slide flat end of battery down into the holder. Drop contact end of battery into position, and release clip |
| <b>Removal</b>   | Pull back moulded clip part of holder, and lift battery out of holder, contact end first.  |

| Component              | Material        | Finish           |
|------------------------|-----------------|------------------|
| Body                   | PBT             | Colour - Natural |
| Spring and Solder Tail | Phosphor Bronze | Electro Tin      |

Mechanical tolerance unless otherwise stated  $\pm 0.010(0,25)$