




HAMMOND  
MANUFACTURING®

www.hammondmfg.com

# 266L12B

## Power Transformer - Low Voltage/Filament Dual Primary & Secondary - Open Style Chassis Mount

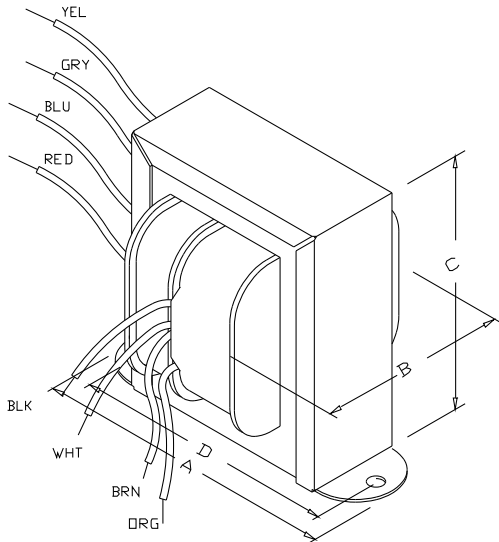


### Features

- Primary 117/234 VAC, 50/60 Hz.
- All units have dual secondaries except 266LA25 (C.T. secondary only). If you only require a single primary & secondary check out our more economical 166 Series.
- Secondaries can be used as; a center tapped secondary, parallel connected or used individually (except 266LA25).
- Units are designed for use with all windings engaged.
- Open style.
- Minimum 6" long leads.
- Dual bobbin design - no electrostatic shield required.
- We use Class B insulation (130 degrees, C) for extra protection - UL listed as a Class A (105 degree, C) design
- Hi-Pot test of 2,000V RMS.
- UL listed (# E207860) Type 3AH
- CSA certified (209651)

| Overall Dimensions (in / mm)  |                        |
|-------------------------------|------------------------|
| A                             | 3.13 / 80              |
| B                             | 1.97 / 50              |
| C                             | 2.75 / 70              |
| D                             | 2.81 / 71              |
| E                             | 2.81 / -               |
| Weight                        | 1.6 lbs / 0.73 kg      |
| Mounting Hole Sizes (in / mm) |                        |
| Width-wise                    | 0.187 / 5              |
| Depth-wise                    | /                      |
| Electrical                    |                        |
| Size (VA)                     | 25.2                   |
| Primary                       | 117/234 VAC, 50/60 Hz. |
| Secondary Series (C.T.)       | 12.6V @ 2A             |
| Secondary Parallel            | 6.3V @ 4A              |

### Connection Information 266 Series Power Transformers

#### Primary Connections - 266 Series Transformers

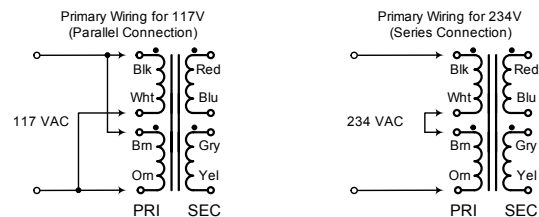

#### Secondary Connections - 266 Series Transformers

