




ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG


REVISIONS

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
615	A	RELEASED	JWM	6/7/01	HO	8/2/02	DJC	8/2/02

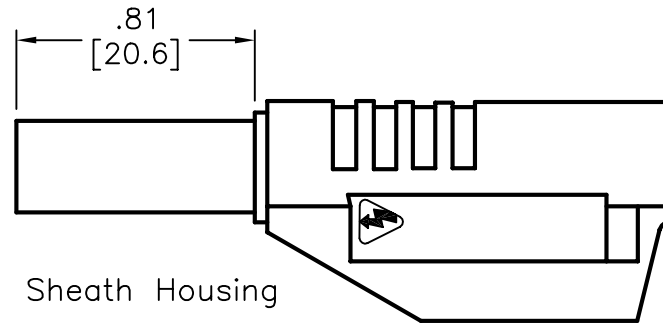

Sheath Housing

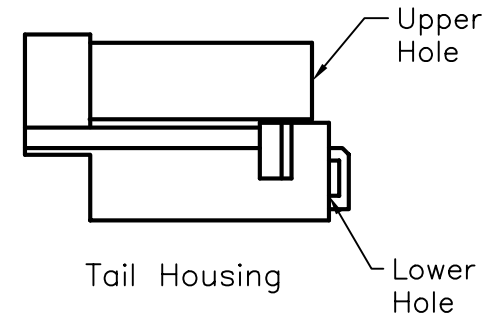


Tail Housing



Plug Assembly

Set Screw

- SPECIFICATIONS:**
INSULATOR BODY: POLYACETAL
PLUG BODY: BRASS, NICKEL PLATED
CONTACT SPRING: BECU, NICKEL PLATED
- RATING:**
VOLTAGE: 1000V CATIII P2 IEC61010-2-031
REINFORCED INSULATION, CE MARK
CURRENT: 36A MAX.
INTERNAL RESISTANCE: <20milliohms
TEMPERATURE: -20°C TO +80°C.
- MAXIMUM WIRE SIZES:**
CONDUCTOR: Ø.090 (12AWG)
INSULATION: Ø.156 (3.9)
STRIP LENGTH: .25 (6.4)

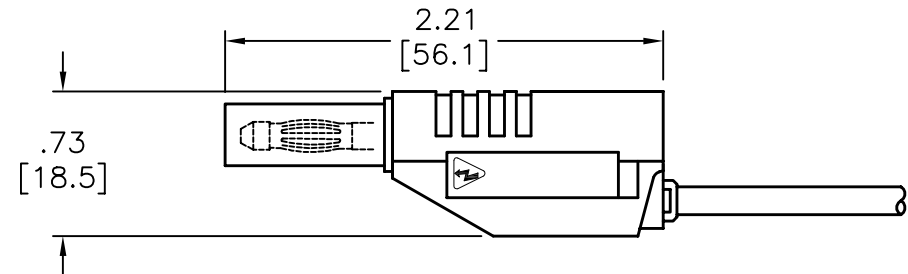

Assembly Instructions:

- Slide wire through lower hole in Tail Housing.
- Strip wire .25" (6.4mm).
- Insert stripped wire into Plug Assembly side hole and tighten Set-Screw. Set-Screw requires 1.5mm Allen Wrench
- Push Plug Assembly into Tail Housing upper hole and take slack out of wire.
- Snap Tail Housing assembly into Sheath Housing.

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:
Tolerances Unless
Otherwise Specified
.XX ±.02
.XXX ±0.005

DRAWN BY:	DATE:
Jeff McVicker	6/6/01
CHECKED BY:	DATE:
Hisham Odish	8/2/02
APPROVED BY:	DATE:
Daniel Carey	8/2/02

DRAWING TITLE: Do-It-Yourself, 4mm, Sheathed, Stacking, Banana Plug, Black			
SIZE A	DWG. NO. 76-007	ELECTRONIC FILE 16F7679.dwg	REV A
SCALE: NTS		U.O.M.: INCHES [mm]	SHEET: 1 OF 1