

Datasheet - AZM

170SK-11/11ZRK-2197 24 VAC/DC

Solenoid interlock / AZM 170



- thermoplastic enclosure
- Double-insulated 
- Compact design
- 90 mm x 84 mm x 30 mm
- 1 Cable entry M 20 x 1.5
- Interlock with protection against incorrect locking.
- Long life
- High holding force
- Manual release from side
- Cut clamp termination

(Minor differences between the printed image and the original product may exist!)

Ordering details

Product type description	AZM 170SK-11/11ZRK-2197 24 VAC/DC
Article number	1179710
EAN code	4030661312798

Classification

Standards	EN ISO 13849-1
B _{10d} Opener (NC)	2.000.000
Mission time	20 Years
notice	$MTTF_d = \frac{B_{10d}}{0,1 \times n_{op}}$ $n_{op} = \frac{d_{op} \times h_{op} \times 3600 \text{ s/h}}{t_{zyklus}}$

Global Properties

Product name	AZM 170
Standards	EN 60947-5-1, BG-GS-ET-19
Compliance with the Directives (Y/N) 	Yes
Number of actuating directions	2 piece
Active principle	electromechanical
Duty cycle	Magnet 100 %
Materials	
- Material of the housings	Plastic, glass-fibre reinforced thermoplastic, self-extinguishing

- Material of the contacts	Silver
Housing coating	None
Weight	315 g

Mechanical data

Design of electrical connection	Screw terminals
Cable section	
- Min. Cable section	1 x 0,75 mm ²
- Max. Cable section	1 x 1.5 mm ² , flexible
Mechanical life	> 1.000.000 operations
Emergency unlocking device (Y/N)	No
Manual release (Y/N)	Yes
- right	
Emergency release (Y/N)	No
Latching force	30 N
Positive break force	8.5 N
positive break travel	11 mm
Clamping force F _{max}	1000 N
Max. Actuating speed	2 m/s

Ambient conditions

Ambient temperature	
- Min. environmental temperature	- 25°C
- Max. environmental temperature	+ 60°C
Protection class	IP67 to IEC/EN 60529

Electrical data


Design of control element	Normally open contact (NO), Opener (NC)
Switching principle	Creep circuit element
Number of auxiliary contacts	2 piece
Number of safety contacts	2 piece
Power to unlock	Yes
Power to lock	No
Rated control voltage U _s	24 VAC/DC
Power consumption	max. 10 W
Rated impulse withstand voltage U _{imp}	4 kV
Rated insulation voltage U _i	250 V
Thermal test current I _{the}	10 A
Utilisation category	AC-15: 230 V / 4 A DC-13: 24 V / 4 A
Max. fuse rating	6 A gG D-fuse

ATEX

Explosion protection categories for gases	None
Explosion protected category for dusts	None

Miscellaneous data

Applications	 sliding safety guard,
--------------	---



removable guard,
hinged safety guard

Dimensions

Dimensions of the sensor

- Width of sensor	108 mm
- Height of sensor	100.5 mm
- Length of sensor	30 mm


notice

Individual coding available on request

Manual release from side

- For manual release using M5 triangular key, available as accessory
- Additional manual release on side

Diagram

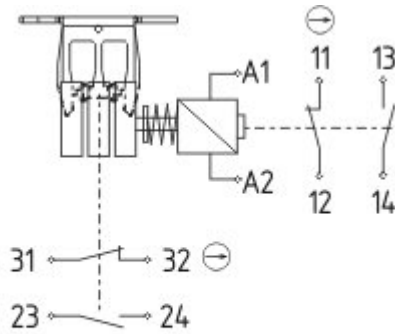

11	12	13	14		23	24	31	32		A1	A2
----	----	----	----	--	----	----	----	----	--	----	----

Note Diagram



positive break NC contact



active



no active



Normally-open contact



Normally-closed contact

Ordering suffix

The applicable ordering suffix is added at the end of the part number of the safety switch.

Order example: AZM 170SK-11/11ZRK-2197 24 VAC/DC-**1637**

...**1637**

0,3 µm gold-plated contacts

...**ST-2431**

connector M12 , Individual solenoid monitoring

Ordering code

AZM 170(1)-(2)Z(3)K(4)-(5)-(6)-(7)

(1)

without IDC method of termination

SK Screw connection

(2)

11 1 Normally open contact (NO) / 1 Opener (NC)

02 2 Opener (NC)

12/0.0 1 Normally open contact (NO), 2 Opener (NC) / -

(3)

without Latching force 5 N

R Latching force 30 N

I Individual coding

(4)

without Power to unlock

A Power to lock

(5)

without cable gland

ST Connector M12 x 1

ST-2431 Connector M12 x 1, Individual solenoid monitoring

(6)

24VAC/DC U_s 24 VAC/DC

110VAC U_s 110 VAC

230VAC U_s 230 VAC

(7)

without Manual release

2197 Manual release from side (Power to unlock)

1637 gold-plated contacts

AZM 170ST and AZM 170SK

AZM 170ST-(1)Z(2)K(3)-(4)-(5)-024

AZM 170SK-(1)Z(2)K(3)-(4)-(5)-024

(1)

11/11 1 Normally open contact (NO), 1 Opener (NC) / 1 Normally open contact (NO), 1 Opener (NC)

11/02 1 Normally open contact (NO), 1 Opener (NC) / 2 Opener (NC)

12/00 1 Normally open contact (NO), 2 Opener (NC) / -

12/11 1 Normally open contact (NO), 2 Opener (NC) / 1 Normally open contact (NO), 1 Opener (NC)

12/02 1 Normally open contact (NO), 2 Opener (NC) / 2 Opener (NC)

02/01 2 Opener (NC), - / 1 Opener (NC), -

02/10 2 Opener (NC), - / 1 Normally open contact (NO), -

(2)

without Latching force 5 N

R Latching force 30 N

(3)

without Power to unlock

A Power to lock

(4)

1637 gold-plated contacts

(5)

2197 Manual release for Power to unlock

http://127.0.0.1/Bilddata/Azm/Pdf/Azm170/bedien/azm170-xx-xx/de/mrl_azm170-xx-xx_de.pdf

http://127.0.0.1/Bilddata/Azm/Pdf/Azm170/bedien/azm170-xx-xx/fr/mrl_azm170-xx-xx_fr.pdf

http://127.0.0.1/Bilddata/Azm/Pdf/Azm170/bedien/azm170-xx-xx/es/mrl_azm170-xx-xx_es.pdf

http://127.0.0.1/Bilddata/Azm/Pdf/Azm170/bedien/azm170-xx-xx/en/mrl_azm170-xx-xx_en.pdf

http://127.0.0.1/Bilddata/Azm/Pdf/Azm170/bedien/azm170-xx-xx/nl/mrl_azm170-xx-xx_nl.pdf

http://127.0.0.1/Bilddata/Azm/Pdf/Azm170/bedien/azm170-xx-xx/jp/mrl_azm170-xx-xx_jp.pdf

http://127.0.0.1/Bilddata/Azm/Pdf/Azm170/bedien/azm170-xx-xx/it/mrl_azm170-xx-xx_it.pdf

http://127.0.0.1/Bilddata/Azm/Pdf/Azm170/baumuste/z_m17p02.pdf


http://127.0.0.1/Bilddata/Azm/Pdf/Azm170/baumuste/z_m17p01.pdf

http://127.0.0.1/Bilddata/Azm/Pdf/Azm161/zertifikat/q_371p02.pdf

http://127.0.0.1/Bilddata/Azm/Pdf/Azm161/zertifikat/q_371p03.pdf

[illegible]

Dimensional drawing (basic component)

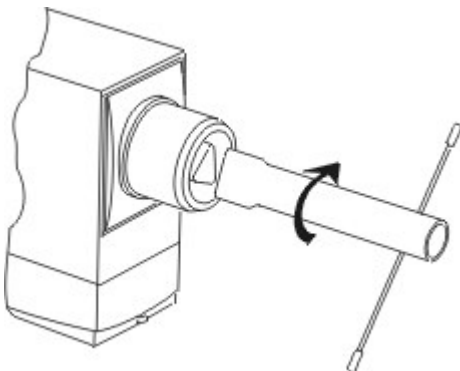

System components

Actuator



1122893 - AZ 17/170-B1

- Particularly suitable for sliding doors



1137406 - AZ 17/170-B1-2245

- Damps vibration on guard device



1122895 - AZ 17/170-B5

- Particularly suitable for hinged guards (front mounting)



1139788 - AZ 17/170-B11

- Particularly suitable for sliding doors



1139789 - AZ 17/170-B15

- Particularly suitable for hinged guards (front mounting)




1123391 - AZM 170-B6

- For very small actuating radii
- The direction of actuation can be selected by applicable insertion of the insert

Accessories

1208493 - AZM 170-B CENTERING GUIDE

- for AZ 17 and AZM 170



1100887 - TRIANGULAR KEY M5



- For manual release using M5 triangular key, available as accessory
- For maintenance, installation, etc.

K.A. Schmersal GmbH, Möddinghofe 30, D-42279 Wuppertal

The data and values have been checked thoroughly. Technical modifications and errors excepted.

Generiert am 21.04.2011 - 10:34:41h Kasbase 1.4.7 DBI