
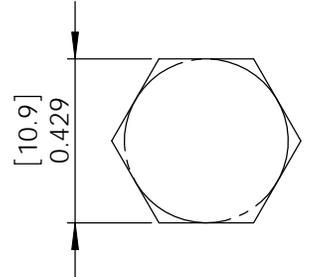




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	Initial Release	07/08/06	K.Burgner
B	Updated format and Connector info ECN#4368	11/11/09	B.Puchaski
C	Removed Insulator Pad, Update Body ECN#4692	04/16/10	B.Puchaski


DESCRIPTION	MATERIAL	FINISH
CENTER CONTACTS	BRASS	GOLD
OUTER CONTACT	BRASS	NICKEL
BODY	BRASS	NICKEL
CRIMP FERRULE	COPPER	NICKEL
GASKET	RUBBER	---
INSULATOR	TEFLON	---
RETAINING RING	Phosphor Bronze	---

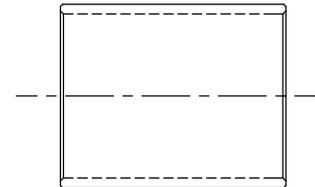

RECOMMENDED FERRULE CRIMP SIZE



RECOMMENDED PIN CRIMP SIZE

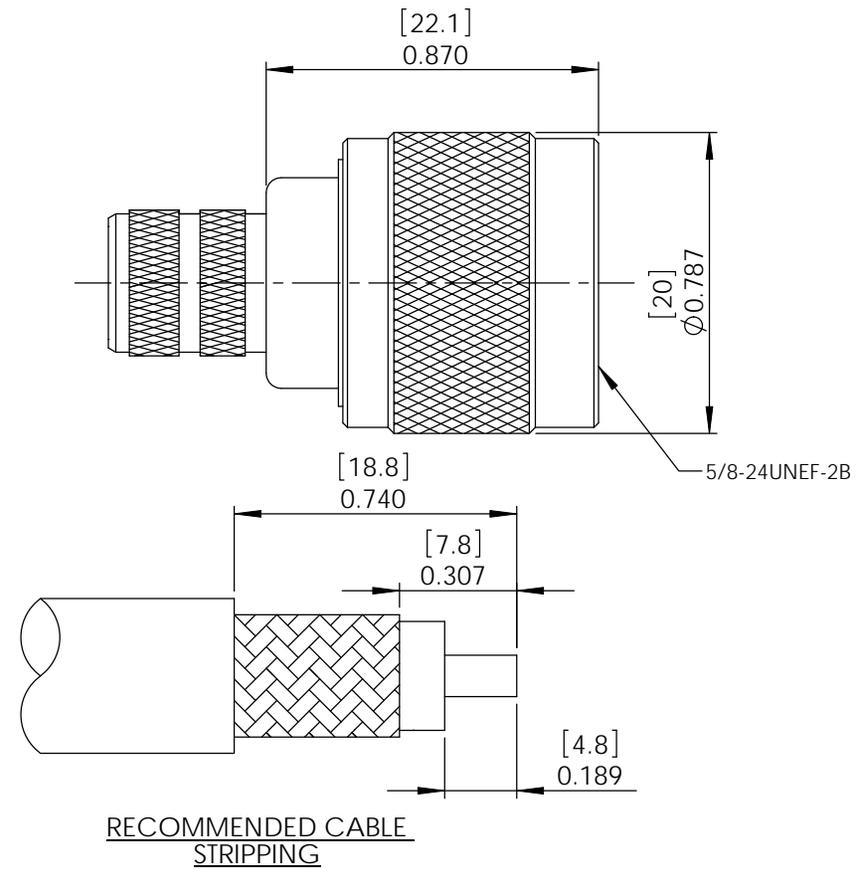

RECOMMENDED CABLE STRIPPING

**NOTES:**

**ELECTRICAL:**  
 IMPEDENCE: 50 OHMS  
 WITHSTAND VOLTAGE: 2500V  
 FREQUENCY RANGE: 0~6 GHz  
 VSWR: <1.50 @ 0~6 GHz  
 DURABILITY: ≥ 500 CYCLE  
 CABLE RETENTION: > 40 POUNDS

**MISCELLANEOUS:**  
 COMPONENTS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATIONS PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

**RoHS Compliant**

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]  DIMENSIONAL TOLERANCES: .X = ±.1 .XX = ±.01 .XXX = ±.005  ANGULAR TOLERANCES: ALL = ± 1°	APPROVALS DRAWN BY <b>B.Puchaski</b>	DATE <b>11/11/09</b>		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845		
	CHECKED BY <b>M.Audas</b>	<b>11/11/09</b>		CATEGORY <b>CONNECTOR</b>		
	APPROVED BY <b>M.Audas</b>	<b>11/11/09</b>	PRODUCT DESCRIPTION <b>N STRAIGHT MALE CRIMP FOR RG8 / LMR400</b>	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. <b>ANM-1406</b>
PROJECTION 	COLOR VARIATIONS MAY OCCUR	SCALE: NONE	CAD FILE: ANM-1406.SLDDRW	SHEET 1 OF 1		