

SL Series 85° SMD Ecap



Features:

- Designed for surface mounting on high density PC board
- Supplied with carrier taping for automatic mounting machine
- Guarantees 2,000 hours at 85°C


Specifications

Item	Characteristics									
Operating Temperature Range	-40°C to +85°C									
Working Voltage Range	4 to 100 V									
Capacitance Range	0.1 to 1,500 μ F									
Capacitance Tolerance	\pm 20% (120 Hz, 20°C)									
Maximum Leakage Current	$I \leq 0.01 CV$ or 3 (μ A) whichever is greater (after 2 mins.)									
Dissipation Factor at 120 Hz, 20°C tan δ (max.)	W V	4	6.3	10	16	25	35	50	63	100
	$\emptyset 3$	0.4	0.3	-	0.19	0.16	0.14	0.14	-	-
	$\emptyset 4$ to 6.3	0.35	0.26	0.2	0.16	0.14	0.12	0.12	0.12	0.1
	$\emptyset 8$ to 10	-	0.3	0.24	0.2	0.16	0.14			
Low Temperature Characteristics (Impedance ratio at 120 Hz)	W V	4	6.3	10	16	25	35	50	93	100
	Z-25°C / Z+20°C	7	4	3	2	2	2	2	2	2
	Z-40°C / Z+20°C	15	8	8	4	4	3	3	3	3
Load Life (After application of the rated voltage for 2,000 hrs at 85°C)	Capacitance change	Within \pm 25% of initial value (4 W V < \pm 30%)								
	Tan δ	Less than 200% of initial specified value								
	Leakage current	Less than specified value								
Shelf Life (at 85°C)	After 1,000 hrs no load test, leakage current, capacitance change and tan δ are as same as load life value									
Soldering Heat Resistance	Place terminal side surface on 250°C hot plate for 30 s allow test samples to be cooled down to room temperature									
	Capacitance change	Within \pm 10% of initial value								
	Tan δ	Less than initial specified value								
	Leakage Current									

SL Series 85° SMD Ecap



Diagram of Dimensions

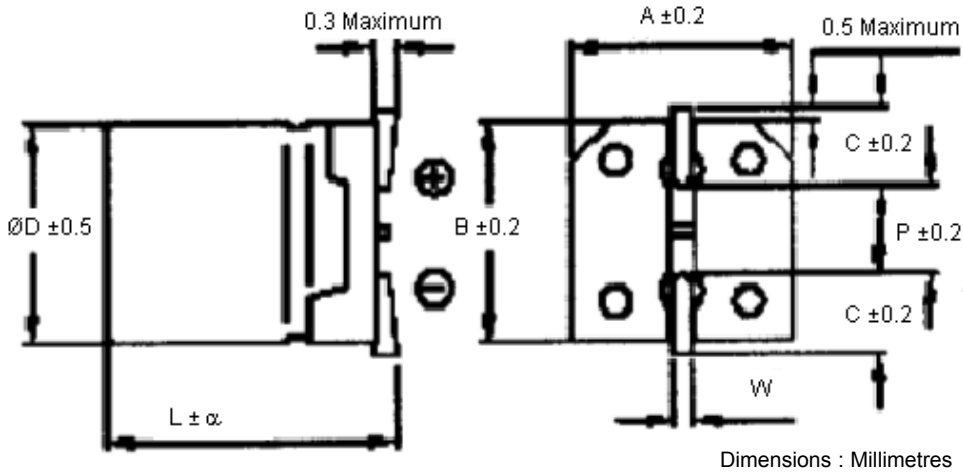

Dimensions : Millimetres

$\text{ØD} \pm 0.5$ Maximum	L	α	$A \pm 0.2$	$B \pm 0.2$	$C \pm 0.2$	W	$P \pm 0.2$	
3	5.4	0.3	3.3	3.3	1.5	0.45 to 0.75	0.6	
4	5.2		4.3	4.3	1.8	0.5 to 0.8	1	
	6		5.3	5.3	2.1		1.4	
5	5.2		6.6	6.6	2.4		2.2	
6.3	6	0.5	8.3	8.3	2.9		0.7 to 1	3.2
	7.7		10.3	10.3	3.2	4.6		
8	10.5							
10								

Dimensions : Millimetres

Dimensions and Maximum Permissible Ripple Current mA (rms) at 120 Hz, 105°C

W V µF	4		6.3		10		16		25		35		50		63		100	
	0.1	-	-	-	-	-	-	-	-	-	-	-	-	*4 × 5.2	1	4 × 5.2	1	-
0.22	-	-	-	-	-	-	-	-	-	-	-	2	2.3		-		-	
0.33	-	-	-	-	-	-	-	-	-	-	-	2.8	3.5		-		-	
0.47	-	-	-	-	-	-	-	-	-	-	-	4	5		-		-	
1	-	-	-	-	-	-	-	-	-	-	-	5.4 (8)	10	4 × 5	10			
2.2	-	-	-	-	-	-	-	-	*	(8)	13 (10)	15		20				
3.3	-	-	-	-	-	-	-	-	-	*	(10)	4 × 5.2	17	20	6.3 × 6	28		
4.7	-	-	-	-	-	-	-	*4 × 5.2	16 (12)	4 × 5.2	18	5 × 5.2	20	23	35			
10	-	-	-	-	-	-	*4 × 5.2	25 (15)	5 × 5.2	27	5 × 5.2	29	6.3 × 5.2	33	6.3 × 5.2	34	6.3 × 7.7	90

SL Series 85° SMD Ecap



Dimensions and Maximum Permissible Ripple Current mA (rms) at 120 Hz, 105°C

W V μF	4		6.3		10		16		25		35		50		63		100	
22	*	(19)	*4 × 5.2	31 (19)	5 × 5.2	33	5 × 5.2	37	6.3 × 5.2	42	6.3 × 5.2	46	6.3 × 6	45	6.3 × 7.7	70	8 × 10.5	120
33	4 × 5.2	25	5 × 5.2	37		41	6.3 × 5.2	49		6.3 × 6	52	6.3 × 6	60	6.3 × 7.7	85	8 × 10.5	160	10 × 10.5
47		33		45	52	58		68	70		90		170		-		-	
56	5 × 5.2	42	6.3 × 5.2	54	6.3 × 5.2	58	6.3 × 6	74	6.3 × 6	82	6.3 × 7.7	80	8 × 10.5	110	10 × 10.5	200	-	-
68		45		62		72		80		94		110		170		230	-	-
100	6.3 × 5.2	55	6.3 × 5.2	70	6.3 × 6	75	6.3 × 7.7	88	8 × 10.5	130	8 × 10.5	120	10 × 10.5	200	10 × 10.5	280	-	-
150		74		78		88		135		200		220		240	-	-	-	-
220	6.3 × 5.2	82	8.3 × 5	95	6.3 × 7.7	150	6.3 × 7.7	150	8 × 10.5	250	8 × 10.5	270	10 × 10.5	320	-	-	-	-
330		102		150		250		280		310		340		-	-	-	-	-
470	6.3 × 7.7	150	8 × 10.5	270	8 × 10.5	300	10 × 10.5	330	10 × 10.5	430	-	-	-	-	-	-	-	-
680	-	-		320		380		390		-	-	-	-	-	-	-	-	-
1,000	-	-	10 × 10.5	330	10 × 10.5	450	-	-	-	-	-	-	-	-	-	-	-	-
1,500	-	-		450		-	-	-	-	-	-	-	-	-	-	-	-	-

*Ø3 is available

Part Number Table

Description	Part Number
Capacitor, Case B, 33μF, 4V	MCESL4V336M4X5.2
Capacitor, Case B, 47μF, 4V	MCESL4V476M4X5.2
Capacitor, Case D, 56μF, 4V	MCESL4V566M5X5.2
Capacitor, Case D, 68μF, 4V	MCESL4V686M5X5.2
Capacitor, Case D, 100μF, 4V	MCESL4V107M5X5.2
Capacitor, Case E, 150μF, 4V	MCESL4V157M6.3X5.2
Capacitor, Case E, 220μF, 4V	MCESL4V227M6.3X5.2
Capacitor, Case F, 330μF, 4V	MCESL4V337M6.3X7.7
Capacitor, Case G, 470μF, 4V	MCESL4V477M6.3X7.7
Capacitor, Case D, 33μF, 6.3V	MCESL6V3336M5X5.2
Capacitor, Case D, 47μF, 6.3V	MCESL6V3476M5X5.2
Capacitor, Case D, 56μF, 6.3V	MCESL6V3566M5X5.2
Capacitor, Case E, 68μF, 6.3V	MCESL6V3686M6.3X5.2
Capacitor, Case E, 150μF, 6.3V	MCESL6V3157M6.3X5.2
Capacitor, Case F, 220μF, 6.3V	MCESL6V3227M6.3X5.4

SL Series 85° SMD Ecap



Part Number Table

Description	Part Number
Capacitor, Case G, 330 μ F, 6.3V	MCESL6V3337M6.3X7.7
Capacitor, Case H, 470 μ F, 6.3V	MCESL6V3477M8X10.5
Capacitor, Case H, 680 μ F, 6.3V	MCESL6V3687M8X10.5
Capacitor, Case H, 1000 μ F, 6.3V	MCESL6V3108M8X10.5
Capacitor, Case J, 1500 μ F, 6.3V	MCESL6V3158M10X10.5
Capacitor, Case D, 22 μ F, 10V	MCESL10V226M5X5.2
Capacitor, Case D, 33 μ F, 10V	MCESL10V336M5X5.2
Capacitor, Case E, 47 μ F, 10V	MCESL10V476M6.3X5.2
Capacitor, Case E, 56 μ F, 10V	MCESL10V566M6.3X5.2
Capacitor, Case E, 68 μ F, 10V	MCESL10V686M6.3X5.2
Capacitor, Case E, 100 μ F, 10V	MCESL10V107M6.3X5.2
Capacitor, Case F, 150 μ F, 10V	MCESL10V157M6.3X5.4
Capacitor, Case H, 330 μ F, 10V	MCESL10V337M8X10.5
Capacitor, Case H, 470 μ F, 10V	MCESL10V477M8X10.5
Capacitor, Case J, 680 μ F, 10V	MCESL10V687M10X10.5
Capacitor, Case J, 1000 μ F, 10V	MCESL10V108M10X10.5
Capacitor, Case D, 22 μ F, 16V	MCESL16V226M5X5.2
Capacitor, Case E, 33 μ F, 16V	MCESL16V336M6.3X5.2
Capacitor, Case E, 56 μ F, 16V	MCESL16V566M6.3X5.2
Capacitor, Case E, 68 μ F, 16V	MCESL16V686M6.3X5.2
Capacitor, Case E, 100 μ F, 16V	MCESL16V107M6.3X5.2
Capacitor, Case G, 150 μ F, 16V	MCESL16V157M6.3X7.7
Capacitor, Case G, 220 μ F, 16V	MCESL16V227M6.3X7.7
Capacitor, Case H, 330 μ F, 16V	MCESL16V337M8X10.5
Capacitor, Case H, 470 μ F, 16V	MCESL16V477M8X10.5
Capacitor, Case J, 680 μ F, 16V	MCESL16V687M10X10.5
Capacitor, Case D, 10 μ F, 25V	MCESL25V106M5X5.2
Capacitor, Case E, 22 μ F, 25V	MCESL25V226M6.3X5.2
Capacitor, Case E, 33 μ F, 25V	MCESL25V336M5X5.2
Capacitor, Case F, 47 μ F, 25V	MCESL25V476M6.3X5.4
Capacitor, Case F, 56 μ F, 25V	MCESL25V566M6.3X5.4
Capacitor, Case F, 68 μ F, 25V	MCESL25V686M6.3X5.4
Capacitor, Case H, 150 μ F, 25V	MCESL25V157M8X10.5
Capacitor, Case H, 220 μ F, 25V	MCESL25V227M8X10.5
Capacitor, Case H, 330 μ F, 25V	MCESL25V337M8X10.5

SL Series 85° SMD Ecap



Part Number Table

Description	Part Number
Capacitor, Case J, 470 μ F, 25V	MCESL25V477M10X10.5
Capacitor, Case D, 10 μ F, 35V	MCESL35V106M5X5.2
Capacitor, Case F, 33 μ F, 35V	MCESL35V336M6.3X5.4
Capacitor, Case F, 47 μ F, 35V	MCESL35V476M6.3X5.4
Capacitor, Case G, 56 μ F, 35V	MCESL35V566M6.3X7.7
Capacitor, Case G, 68 μ F, 35V	MCESL35V686M6.3X7.7
Capacitor, Case G, 100 μ F, 35V	MCESL35V107M6.3X7.7
Capacitor, Case H, 150 μ F, 35V	MCESL35V157M8X10.5
Capacitor, Case H, 220 μ F, 35V	MCESL35V227M8X10.5
Capacitor, Case J, 330 μ F, 35V	MCESL35V337M10X10.5
Capacitor, Case B, 2.2 μ F, 50V	MCESL50V225M4X5.2
Capacitor, Case B, 3.3 μ F, 50V	MCESL50V335M4X5.2
Capacitor, Case F, 22 μ F, 50V	MCESL50V226M6.3X5.4
Capacitor, Case G, 33 μ F, 50V	MCESL50V336M6.3X7.7
Capacitor, Case G, 56 μ F, 50V	MCESL50V566M6.3X7.7
Capacitor, Case H, 68 μ F, 50V	MCESL50V686M8X10.5
Capacitor, Case J, 150 μ F, 50V	MCESL50V157M10X10.5
Capacitor, Case J, 220 μ F, 50V	MCESL50V227M10X10.5
Capacitor, Case B, 1 μ F, 63V	MCESL63V105M4X5.2
Capacitor, Case B, 2.2 μ F, 63V	MCESL63V225M4X5.2
Capacitor, Case D, 3.3 μ F, 63V	MCESL63V335M5X5.2
Capacitor, Case D, 4.7 μ F, 63V	MCESL63V475M5X5.2
Capacitor, Case E, 10 μ F, 63V	MCESL63V106M6.3X5.2
Capacitor, Case G, 22 μ F, 63V	MCESL63V226M6.3X7.7
Capacitor, Case H, 33 μ F, 63V	MCESL63V336M8X10.5
Capacitor, Case H, 47 μ F, 63V	MCESL63V476M8X10.5
Capacitor, Case H, 56 μ F, 63V	MCESL63V566M8X10.5
Capacitor, Case J, 68 μ F, 63V	MCESL63V686M10X10.5
Capacitor, Case J, 100 μ F, 63V	MCESL63V107M10X10.5
Capacitor, Case C, 1 μ F, 100V	MCESL100V105M4X5.4
Capacitor, Case F, 2.2 μ F, 100V	MCESL100V225M6.3X5.4
Capacitor, Case F, 3.3 μ F, 100V	MCESL100V335M6.3X5.4
Capacitor, Case F, 4.7 μ F, 100V	MCESL100V475M6.3X5.4
Capacitor, Case G, 10 μ F, 100V	MCESL100V106M6.3X7.7
Capacitor, Case H, 22 μ F, 100V	MCESL100V226M8X10.5

SL Series 85° SMD Ecap



Part Number Table

Description	Part Number
Capacitor, Case J, 33 μ F, 100V	MCESL100V336M10X10.5
Capacitor, Case E 100 μ F 6.3V	MCESL6V3107M6.3X5.2
Capacitor, Case G 220 μ F 10V	MCESL10V227M6.3X7.7
Capacitor, Case B 10 μ F 16V	MCESL16V106M4X5.2
Capacitor, Case E 47 μ F 16V	MCESL16V476M6.3X5.2
Capacitor, Case G 100 μ F 25V	MCESL25V107M6.3X7.7
Capacitor, Case B 4.7 μ F 35V	MCESL35V475M4X5.2
Capacitor, Case E 22 μ F 35V	MCESL35V226M6.3X5.2
Capacitor, Case B 1 μ F 50V	MCESL50V105M4X5.2
Capacitor, Case D 4.7 μ F 50V	MCESL50V475M5X5.2
Capacitor, Case E 10 μ F 50V	MCESL50V106M6.3X5.2
Capacitor, Case G 47 μ F 50V	MCESL50V476M6.3X7.7
Capacitor, Case H 100 μ F 50V	MCESL50V107M8X10.5
Capacitor, Case E, 100 μ F, 6.3V	MCESL6V3107M6.3X5.2
Capacitor, Case G, 220 μ F, 10V	MCESL10V227M6.3X7.7
Capacitor, Case B, 10 μ F, 16V	MCESL16V106M4X5.2
Capacitor, Case E, 47 μ F, 16V	MCESL16V476M6.3X5.2
Capacitor, Case G, 100 μ F, 25V	MCESL25V107M6.3X7.7
Capacitor, Case B, 4.7 μ F, 35V	MCESL35V475M4X5.2
Capacitor, Case E, 22 μ F, 35V	MCESL35V226M6.3X5.2
Capacitor, Case B, 1 μ F, 50V	MCESL50V105M4X5.2
Capacitor, Case D, 4.7 μ F, 50V	MCESL50V475M5X5.2
Capacitor, Case E, 10 μ F, 50V	MCESL50V106M6.3X5.2
Capacitor, Case G, 47 μ F, 50V	MCESL50V476M6.3X7.7
Capacitor, Case H, 100 μ F, 50V	MCESL50V107M8X10.5

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2011.