



**Kemo Electronic GmbH**


Klaus Kernchen  
Leher Landstr. 20  
27607 Langen  
Germany

Phone: +49 4743 9338-0  
Fax: +49 4743 9338-22

<http://www.kemo-electronic.eu>  
email: [info@kemo-electronic.de](mailto:info@kemo-electronic.de)

HR.Nr. HRB 111 486  
UstNr: DE 814 380 369

**M032S - Universal Amplifier 12 W "Plug & Play"**

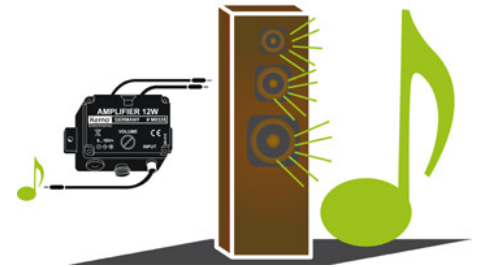

Amplifying module with jacks used for the signal input and for the power supply. Inserted loudspeaker regulator and loudspeaker connection are over the cables.  
Available accessory: M040 - Universal preamplifier

**Technical Data:**

- Operating voltage: 6 - 16V/DC
- Current consumption: max. 800 mA
- Input sensitivity: < 80 mV
- Loudspeaker connection: 4 - 16 Ohm
- Music power: max. 12 W with 16 V/DC at a 4 Ohm Loudspeaker
- Frequency response: approx. 40 - 20.000 Hz
- Power supply jack: for mains plug 2,5 mm
- Dimensions: approx. 72 x 50 x 42 mm (without fastening straps)

**M032S**

