
CLAMP-ON GROUND RESISTANCE TESTER Models 3711 & 3731









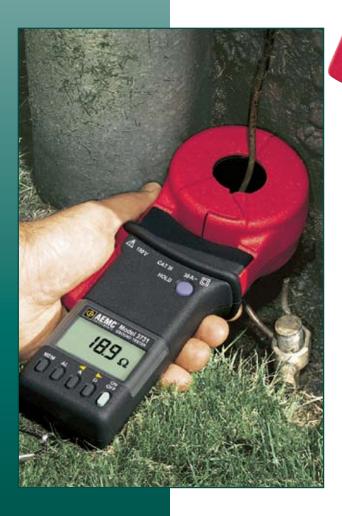





- Measure down to 0.1Ω with resolution of 0.01Ω
- ► Fast settling time (approximately one second)
- ► High immunity to electrical noise for work around transmission towers and substations
- ► Extended battery life over 1000 tests (Auto-Off)
- Rugged jaw construction withstands heavy outdoor usage
- Smooth jaw matting surfaces easily cleaned to maintain reading accordingly
- ▶ US Patent Number 362,639





Model 3731 performing a ground rod resistance check.

The Models 3711 and 3731 measure ground rod and grid resistance in any environment without the use of auxiliary ground rods. Clamp-on ground resistance testers are used on multi-grounded systems without disconnecting the ground under test. The Models 3711 and 3731 simply clamp around the ground conductor or rod and measures the resistance to ground fast and accurately.

By performing measurements on installed ground systems, the user also verifies the quality of the grounding connections and bonds. Resistance and continuity of grounding loops around pads and buildings may also be measured.

Both models include a current measurement function. The probe's high sensitivity enables measurement of leakage current flowing to ground or circulating in ground loops down to 1mA as well as neutral and phase currents to 30Arms. This feature provides additional information, which is vital in distribution ground networks carrying higher levels of noise and harmonics, that affect power quality.

The Model 3731 offers an alarm function and a memory (logging) function. In the alarm mode, the probe will audibly and visually indicate readings beyond set point. The user may also have the alarm initiated above or below the set point. This alarm feature permits quick field checks where "pass" or "fail" readings will suffice.

APPLICATIONS

- Measure electrical ground rod and grid resistance
- Use on multi-grounded systems without disconnecting the ground rod under test
- Measure resistance and continuity of grounding loops around pads and buildings
- Measure leakage current flowing to ground or circulating in ground systems
- Conduct field surveys and retrieve and analyze readings at a later time
- ➤ Use on cell towers and telecommunication sites
- ➤ Use on pools, spas and other consumer installations

FEATURES

- ➤ Simple and fast clamp-on operation no leads, no auxiliary rods or spacing requirements
- \blacktriangleright Direct reading of ground resistance from 0.1Ω to 1200Ω
- Direct reading of continuity and ground loop resistance
- Direct reading of ground leakage or phase current from 1mA to 30Arms
- ➤ Jaw design with large 1.25" (32mm) window accommodates up to 1000kcmil cables
- ➤ Auto-Off for power management
- ➤ Alarm function with adjustable set point and buzzer for quick field checks (Model 3731)
- Memory function to store 99 field measurements for later retrieval and analysis (Model 3731)
- ➤ Meets EN 61010, Cat. III
- CE Mark and UL approved and double insulated
- ➤ Rugged Lexan® head and body construction resists breakage
- ➤ Instrument's alarm settings and stored memory information saved during shutdown (Model 3731)
- > Patented design

FUNCTIONS & FEATURES				
	3711	3731		
Ohms Range	1	1		
Arms Range	1	1		
Hold Function	1	1		
Self Test	1	1		
Auto-Off	1	1		
Battery Life Indicator	1	1		
Noise Indicator	1	1		
Open Jaw Indicator	1	1		
Closed Loop Indicator	1	1		
Multi-Tone Beeper	1	1		
Alarm Function	_	1		
Memory (Logging)	_	1		



CONSTRUCTION

The Models 3711 and 3731 bodies are built of Lexan® (or equivalent polycarbonate) for rugged use. The probe heads are encapsulated in a double-walled shell for extra strength and reinforced for enhanced field reliability. Overall construction and mechanical design ratings such as drop test, shock, vibration and weatherproofing against water penetration or dust, meet or exceed IEC standards. These products have also been designed to EN 61010, Cat. III and are UL approved and are CE Marked.

The probe head, (jaw) is a key component in the measurement and overall product performance. The large jaw thickness permits use on tight ground conductors on poles and in manholes. The 1.25"(32mm) opening accommodates not only ground rods, but also larger ground conductors (up to 1000kcmil) typically found in telecommunication buildings or railroad applications.

The inner jaw is composed of two independent and individually shielded magnetic cores, permitting measurement without noise interference or cross talk common to instruments with separate probes.


Thorough mechanical design, including small winglets, ensures reliable and repetitive jaw alignment for accuracy and prevents undesirable contaminations into the jaw spring assembly. The smooth head surfaces eliminate the build up of foreign particles that cause errors in reading.

CE requirements and design minimize electromagnetic interference near substations and tower sites.

The ergonomic body design permits one-handed operation. The guard provides additional strength, and prevents the hand from slipping or coming into contact with conductors under test. The LCD lens cover may be easily replaced if scratched. The sealed push-buttons directly access all test functions and are easily operated even with gloved hands.



OVERVIEW OF FUNCTIONS



 Ω Displayed when measuring resistance

mA, A Displayed when measuring current

100% Percentage of battery life remaining

Flashing indicates low battery condition

P Indicates the Auto-Off feature is inactive

Indicates Alarm Active Hi or Lo depending on which arrow is displayed

HOLD HOLD pushbutton has been pressed

•••• Active beeper function

NOISE Noise in the reading

Probe jaws not closed properly

 $\bullet 188_{\Omega}$ Alarm set points

MEM Memory function active

Memory Recall (MR) and location (from 1 to 99)

 $R < 1\Omega$ Resistance measured is below .1 Ω

BUTTONS



ON/OFF

Power ON or power OFF. Activates display self test at power-up.

 $\Omega(\blacktriangleright)$

Resistance measurement. (Adjusts the alarm set point and the memory position when in programming mode.)

A ()

Current measurement. (Adjusts the alarm set point and the memory position when in programming mode.)

AL (Model 3731 only)

Activate/deactivate the alarm function. Access the value of the alarm set point when in programming mode.

MEM (Model 3731 only)

Activate the memory function or to read the stored values in MR (Memory Recall). Clears the memory when in programming mode.



SPECIFICATIONS

MODELS	3711 & 3731			
ELECTRICAL				
Ground Resistance Ranges	Measurement Range	Resolution	Accuracy (% of Reading)	
	0.10 to 1.00Ω	0.01Ω	$\pm (2\% \pm 0.02\Omega)$	
	1.0 to 50.0Ω	0.1Ω	$\pm (1.5\% \pm 0.1\Omega)$	
Auto-Ranging	50.0 to 100.0Ω	0.5Ω	$\pm (2\% \pm 0.5\Omega)$	
0.01 to 1200 Ω	100 to 200Ω	1Ω	$\pm (3\% \pm 1\Omega)$	
	200 to 400Ω	5Ω	$\pm (6\% \pm 5\Omega)$	
	400 to 600Ω	10Ω	$\pm (10\% \pm 10\Omega)$	
	600 to 1200Ω	50Ω	Approx: $25\% \pm 50\Omega$	
Current Measurement Ranges	Measurement Range	Resolution	Accuracy (% of Reading)	
Auto-Ranging	1 to 299mA	1mA	$\pm (2.5\% + 2mA)$	
1mA to 30.00Arms	0.300 to 2.999A	0.001A	$\pm (2.5\% + 2mA)$	
	3.00 to 29.99A	0.01A	$\pm (2.5\% + 20\text{mA})$	
Resistance Measurement Frequency		2403Hz		
Current Measurement Frequency	47 to 800Hz			
Current Overload	OL displayed above 29.99Arms			
Power Source	9V Alkaline battery (IEC 6LF22 or NEDA 1604A)			
Battery Life	Typical: 8 hours or approx. 1000 measurements of 30 seconds			
MECHANICAL				
Dimensions	9.25 x 3.94 x 2.17" (235 x 100 x 55mm)			
Weight	2.2 lbs (1kg)			
Jaw Window Diameter	1.25" (32mm)			
Jaw Opening	1.38" (35mm)			
U.S. Patent	No. 362,639			
UL File No.	E192383			
DISPLAY				
LCD	3³/₄ Digit, 1.73 x 1.10" (44 x 28mm)			
ENVIRONMENTAL				
Operating Temperature	14° to 131°F (-10° to 55°C)			
Operating Humidity	10 to 90% RH @ 14° to 104°F (-10° to 40°C), 75% RH @ 131°F (55°C)			
Storage Temperature	-22° to 158°F (-30° to 70°C)			
SAFETY				
Safety Rating	EN 61010-2-032 (Class 2) Double Insulation			
Double Insulation	Yes			
CE Mark	Yes			

Clamp-On Ground Resistance Tester Models 3711 & 3731 include a calibration loop, battery and user manual in a hard carrying case.





Calibration Check Loop (included)

ORDERING INFORMATION	CATALOG NO.
Ground Resistance Tester Model 3711 (Clamp-On)	Cat. #2117.60
Ground Resistance Tester Model 3731 (Clamp-On) with memory and alarm	Cat. #2117.61

AEMC ONE SOURCE

For All Your Electrical Test & Measurement Instruments

Call the AEMC® Instruments Technical Assistance Hotline for immediate consultation with an applications engineer: (800) 343-1391 Chauvin Arnoux®, Inc. d.b.a AEMC® Instruments • 200 Foxborough Blvd. • Foxborough, MA 02035 USA • (800) 343-1391 • (508) 698-2115 • Fax (508) 698-2118