



# How to connect ground terminal blocks electrically to the mounting rail

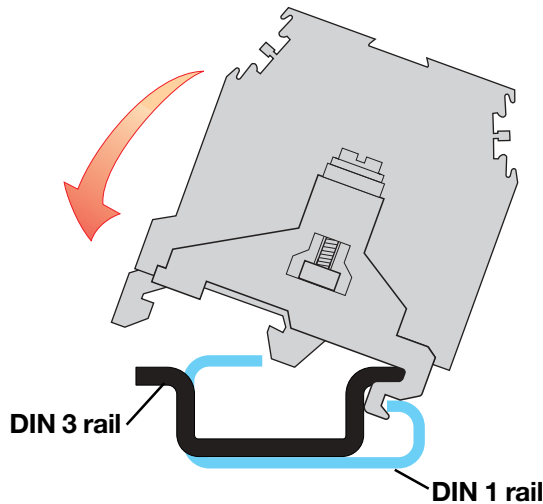


1. Position the block on the mounting rail

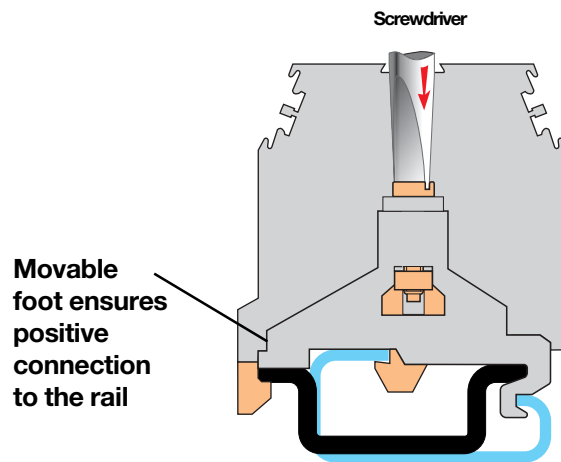

2. Screw down the center of the block to tighten the movable foot on the rail


Blocks can slide on the rail before tightening.

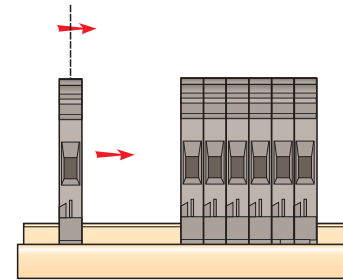

## Ground terminal blocks electrically connected to the mounting rail


### Compression clamp

DIN 1 - 3

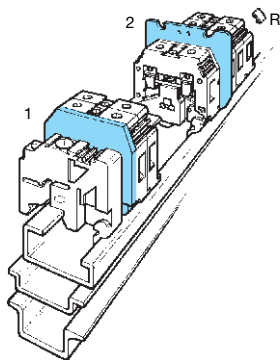

### MA 2,5/5.P

Spacing 5 mm + 0,08 .200"

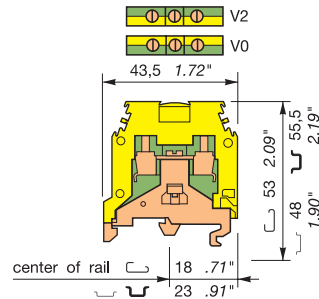


Type	Part number
------	-------------

Green-yellow	
<b>MA 2,5/5.P</b>	<b>0165 488.27</b>
<b>MA 2,5/5.P.V0</b>	<b>0195 488.16</b>

Terminal block for ground wire, same size as MA 2,5/5 terminal block.

### M 4/6.P

Spacing 6 mm + 0,05 .238"




Type	Part number
------	-------------

Green-yellow	
<b>MA 4/6.P</b>	<b>0165 113.16</b>
<b>MA 4/6.P.V0</b>	<b>0195 113.05</b>

Terminal block for ground wire, same size as M 4/6 terminal block.

### M 4/6.3A.P

Spacing 6 mm + 0,05 .238"

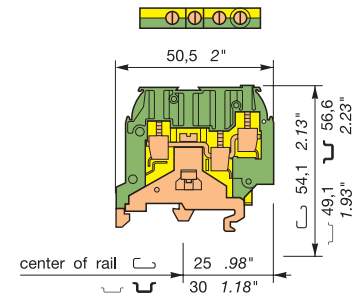

Type	Part number
------	-------------

Green-yellow - UL 94 V0	
<b>M 4/6.3A.P.V0</b>	<b>0195 637.12</b>

Terminal block for ground wire, same size as M 4/6.3A terminal block.

### Characteristics

Wire size	Compression clamp	Solid wire	MA 2,5/5.P			M 4/6.P			M 4/6.3A.P		
			IEC	UL	CSA	IEC	UL	CSA	IEC	UL	CSA
0,2-4 mm <sup>2</sup>			24-12 AWG	24-12 AWG	24-12 AWG	24-10 AWG	24-10 AWG	24-10 AWG	22-10 AWG	12 AWG max.	
0,22-2,5 mm <sup>2</sup>			24-12 AWG	24-12 AWG	24-12 AWG	24-10 AWG	24-10 AWG	24-10 AWG	22-10 AWG	12 AWG max.	
300A/1s						480A/1s			480A/1s		


### Rated wire size / Gauge

2,5 mm <sup>2</sup> /A3	12 AWG	12 AWG	4 mm <sup>2</sup> /A4	10 AWG	10 AWG	4 mm <sup>2</sup> /A4	10 AWG	12 AWG
-------------------------	--------	--------	-----------------------	--------	--------	-----------------------	--------	--------

### Other characteristics

Wirestripping length	Recomm. screwdriver	Recomm. torque	Protection	Wirestripping length	Recomm. screwdriver	Recomm. torque	Protection	Wirestripping length	Recomm. screwdriver	Recomm. torque	Protection
10 mm .39"	3,5 mm .14"	0,4-0,6 Nm 3,5-5,3 lb.in		9,5 mm .37"	4 mm .16"	0,5-0,8 Nm 4,4-7 lb.in		9,5 mm .37"	4 mm .16"	0,5-0,8 Nm 4,4-7 lb.in	

### Approvals



### Accessories

	Type	Part number	Type	Part number	Type	Part number
1 End section	yellow	<b>FEM6</b> th. 2,8 mm	<b>FEM6</b> th. 2,8 mm	<b>0103 062.21</b>	<b>FEM3AP V0</b> green th.3 mm	<b>0199 876.26</b>
	yellow	<b>FEM6 V0</b> th. 2,8 mm	<b>FEM6 V0</b> th. 2,8 mm	<b>0199 305.02</b>		
2 Separator end section	grey	<b>SCF6</b> th. 3 mm	<b>SCF6</b> th. 3 mm	<b>0118 707.03</b>		
On rail : Recomm.screwdriver/Recomm.torque		3,5 mm .14" / 0,6 Nm 5.5 lb.in	4 mm .16" / 0,8 Nm 7.0 lb.in		4 mm .16" / 0,8 Nm 7.0 lb.in	
R See markers marking method		(10) (12)	(11) (12)		(11) (12)	