

## AC TO AC ADAPTOR

**Ideal Power Ltd.**

**77DB-06-09**

INPUT VOLTAGE	<b>240VAC</b>
OUTPUT VOLTAGE	<b>9VAC</b>

### ELECTRICAL & MECHANICAL SPECIFICATION



**BS EN61558**

**KM81689**



**1 8 7 1 8**




#### ELECTRONICAL SPECIFICATION

Input Voltage	<b>240</b>	Volts
Frequency (Hz)	<b>50</b>	Hz
Power Rated (W)	<b>10</b>	W
Exciting Current With No load	<b>50</b>	mA Max
Exciting Current With Full load	<b>70</b>	mA Max
Output Voltage	<b>9.0</b>	Volts±5%
Output Current	<b>0.67</b>	Amp
Output Voltage Without Load	<b>11.6</b>	Volts±3%

#### HI-POT :

Test Time	<b>1</b>	Min
PRI TO SEC	<b>3750</b>	Volts
PRI TO CORE	<b>3750</b>	Volts
SEC TO CORE	<b>1250</b>	Volts
Efficiency	<b>80</b>	%
Insulation Class	<b>B (130)</b>	°C

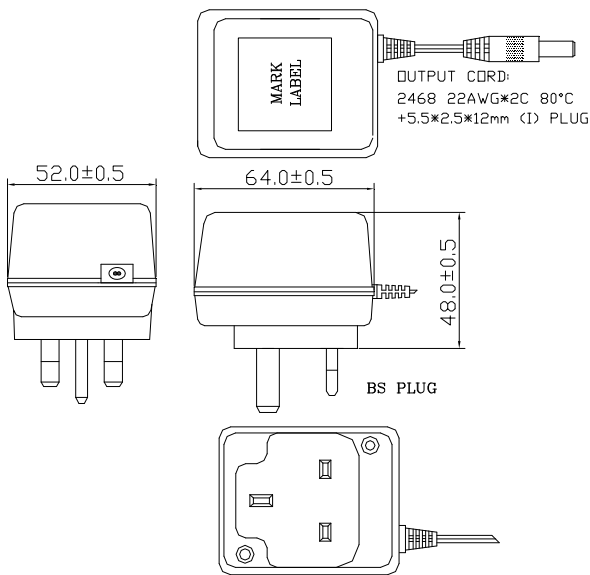


#### MECHANICAL SPECIFICATION

Dimensions (L*W*H)	<b>64.0*52.0*48.0</b>	mm
Weight	<b>250</b>	g
Environment:		
Operating Temperature	<b>-10 To 40</b>	°C
Storage Temperature	<b>-20 To 70</b>	°C
Relative Temperature 40°C±2°C		
<b>RELATIVE HUMIDITY</b>	<b>90% RH</b>	

Input Cable: **BS PLUG IN(3PIN)**

Output Cable: **2468 22AWG/2C 1.8M  
LENGTH+5.5\*2.5\*12mm (I) PLUG**

#### ELECTRICAL CIRCUIT

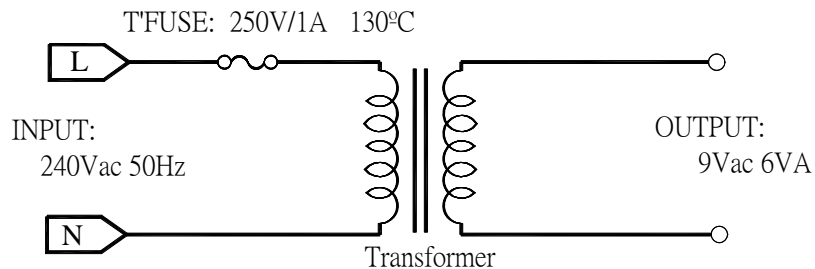

**Head Office : Acorn House, Tree Beech Enterprise Park, Gunn, Barnstaple, Devon, England EX32 7NZ**

TEL: +44 (0) 845 260 3400

FAX: +44 (0) 845 260 3400

E-Mail: [info@idealpower.co.uk](mailto:info@idealpower.co.uk)

WEB: [www.idealpower.co.uk](http://www.idealpower.co.uk)