



Slimline Light SL 025

- Compact design
- Integrated receptacle
- Energy-saving lamp
- On/Off switch or Motion Sensor

The SL025 Light was designed to fit in tight spaces in enclosures. It features an integrated receptacle, so that electrical devices (e.g. power tools) can be easily plugged in when needed. The standard light can be screw-mounted in a variety of positions, or the light can be fitted with an optional magnet mount. The motion sensor was designed so it can be used in enclosures with glass doors and not be activated by movement outside the enclosure.

Technical Data SL 025

Part No.:	Specify according to plug and switch types as shown below
Light bulb:	Compact fluorescent light bulb
Power:	11W (~75W incand.), Base: 2G7, electronic ballast
Luminosity:	900 Lm
Service life:	5000h
Switch:	On/off switch (for light only)
Motion sensor:	PIR = Passive Infrared (see note below)
Receptacle:	max. AC 250 V / 16A (Schuko)
Connection:	3-pole screw terminal for AWG 14 max. (2.5 mm ²) (includes cable strain relief)
Mounting:	M5 screws (not included), 11.8" (300 mm) hole distance or optional attached magnet (see part nos. below)
Dimensions:	L x W x D: 13.6 x 3.6 x 1.6" (345 x 91 x 40 mm)
Housing:	Plastic, UL94V-0
Weight (approx.):	14.1 oz. (400 g), 1.3 lbs. (600 g) with magnet
Protection type:	IP 20
Agency approvals:	VDE, UL submitted for approval


Receptacle	Part Number With On/Off Switch	Part Number With Motion Sensor
Germany (AC 230 V): w/ magnet mounting:	02520.0-00 02520.1-00	02520.0-03 02520.1-03
France (AC 230 V): w/ magnet mounting:	02521.0-00 02521.1-00	02521.0-03 02521.1-03
Switzerland (AC 230 V): w/ magnet mounting:	02522.0-00 02522.1-00	02522.0-03 02522.1-03
UK (AC 230 V): w/ magnet mounting:	02523.0-00 02523.1-00	02523.0-03 02523.1-03
USA/Canada (AC 120 V): w/ magnet mounting:	02524.0-01 02524.1-01	02524.0-04 02524.1-04
No receptacle (AC 230 V): w/ magnet mounting:	02527.0-00 02527.1-00	02527.0-04 02527.1-04
No receptacle (AC 120 V): w/ magnet mounting:	02527.0-10 02527.1-10	02527.0-12 02527.1-12



Light with Motion Sensor



Light with On/Off Switch

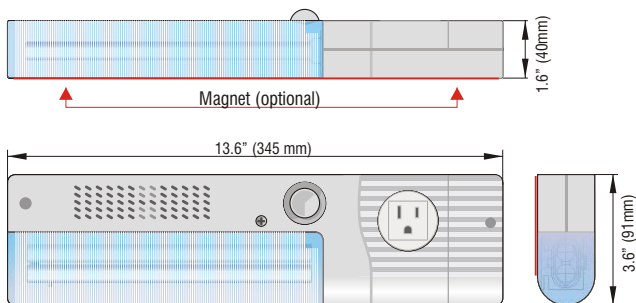

Note: A Passive Infrared (PIR) motion sensor detects the motion of the enclosure door being opened and automatically turns on the light. The sensor is factory pre-set to turn the light off 5 minutes after all motion ceases. The motion sensor does not detect movement through glass or fiberglass, thus allowing installation in enclosure with glass doors.

Specifications are subject to change without notice. Suitability of this product for its intended use and any associated risks must be determined by the end customer/buyer in its final application.