

SlimSeal SSL Connector

The SlimSeal SSL connectors are low profile, single row connectors developed for indoor and outdoor LED lighting applications. These connectors provide low power, sealed solutions for free hanging, wire-to-wire interconnects and for robust, stable electrical and mechanical wire-to-board connections used in solid state lighting.

KEY FEATURES

- Available in 2, 3 & 4 positions
- SMT and thru hole
- Wire-to-wire and wire-to-board (vertical and right angle)
- 18 24 AWG stranded wire
- Positive integral latching
- Polarized connectors
- Pre-assembled seals & wire guides
- IP67 rating
- UV resistance (wire-to-wire)

APPLICATIONS

- Billboards
- Live events lighting
- Wall wash lighting
- Spot lighting
- Street lighting
- Tunnel lighting
- Flood lights
- LED strip lighting



SlimSeal SSL Connector



LIGHTING APPLICATIONS





Channel/Sign

Emergency





Digital Signage

Architectural



Street & Stadium

Indoor





Commercial Refrigeration

ELECTRICAL

Operating Current : 5 AMPS (18-20 AWG) & 3.5 AMPS (22-24 AWG) Maximum Operating Voltage : 400VAC / 400VDC Dielectric Withstanding Voltage : 1500 VAC

MECHANICAL

Number of positions : 2, 3 and 4

Operating Temperature : -40°C to 105°C

Seal Rating : IP67

Durability : 30 mating cycles

MATERIALS

Housings : UL 94 VO rated high temperature resistant thermoplastic

Receptacle Contacts : Tin Plated Copper Alloy

Tab Contacts : Tin Plated Brass

Integral Seals : Silicone Rubber

STANDARDS AND SPECIFICATIONS

UL 1977, CSA C22.2 No. 182.3

TE Application Specification : 114-13261

TE Product Specification : 108-2391

Exposure : UL 746C F1 (suitable for outdoor use, wire-to-wire only)

APPLICATION TOOLING

18-20 AWG Tab and Receptacle Terminals

| PART NUMBER | DESCRIPTION |
|-------------|---------------------------------|
| 2063957-1 | Hand Tool |
| 1530177-2 | HDI Applicator-Bench Terminator |
| 1530177-1 | HDI Applicator-Leadmaker |


22-24 AWG Tab and Receptacle Terminals


| PART NUMBER | DESCRIPTION |
|-------------|---------------------------------|
| 2063956-1 | Hand Tool |
| 1530178-2 | HDI Applicator-Bench Terminator |
| 1530178-1 | HDI Applicator-Leadmaker |




PRODUCT DIMENSIONS


Vertical SMT Header








Recommended PCB Layout

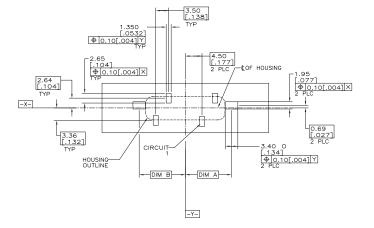


| PART NUMBER | POSITION SIZE | DESCRIPTION | DIM "A" | DIM "B" | DIM "C" | DIM "D" |
|------------------------|----------------------|---------------------|--------------|--------------|--------------|---------------|
| 2106053-2 2 SMT Ver | | SMT Vertical Header | 8.96 [.353] | 8.96 [.353] | 14.40 [.567] | 20.65 [.813] |
| 2106053-4 | 2106053-4 3 SMT Vert | | 12.46 [.491] | 8.96 [.353] | 17.90 [.705] | 24.15 [.951] |
| 2106053-6 4 SMT | | SMT Vertical Header | 12.46 [.491] | 12.46 [.491] | 21.40 [.843] | 27.65 [1.089] |

Right Angle SMT Header



Recommended PCB Layout

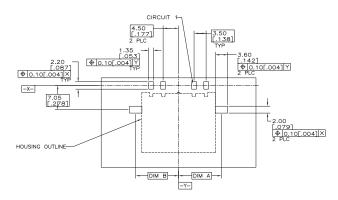



| PART NUMBER | PART NUMBER POSITION SIZE DESCRI | | DIM "A" | DIM "B" | DIM "C" | DIM "D" |
|------------------------------------|----------------------------------|------------------------|--------------|--------------|---------------|--------------|
| 2106056-2 2 SMT R | | SMT Right Angle Header | 8.96 [.353] | 8.96 [.353] | 20.61 [.811] | 14.40 [.567] |
| 2106056-5 3 SM ⁻ | | SMT Right Angle Header | 12.46 [.491] | 8.96 [.353] | 24.11 [.949] | 17.90 [.705] |
| 2106056-8 4 St | | SMT Right Angle Header | 12.46 [.491] | 12.46 [.491] | 27.61 [1.087] | 21.40 [.843] |




PRODUCT DIMENSIONS cont.

Vertical Thru Hole Header






Recommended PCB Layout

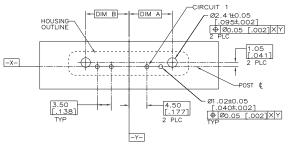



| PART NUMBER | POSITION SIZE | DESCRIPTION | DIM "A" | DIM "B" | DIM "C" |
|-------------|---------------|--------------------|--------------|--------------|--------------|
| 2106112-2 | 2 | TH Vertical Header | 7.42 [.292] | 7.42 [.292] | 17.54 [.691] |
| 2106112-4 | 3 | TH Vertical Header | 10.92 [.430] | 7.42 [.292] | 21.04 [.828] |
| 2106112-6 | 4 | TH Vertical Header | 10.92 [.430] | 10.92 [.430] | 24.54 [.966] |

2.71 [.107] 2 PLC


Right Angle Thru Hole Header








Recommended PCB Layout

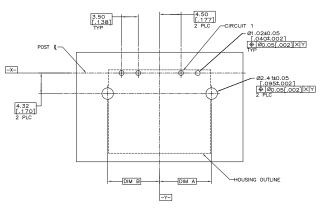


| PART NUMBER | POSITION SIZE | DESCRIPTION | DIM "A" | DIM "B" | DIM "C" |
|-------------|---------------|-----------------------|--------------|--------------|--------------|
| 2106111-2 | 2 | TH Right Angle Header | 7.42 [.292] | 7.42 [.292] | 17.54 [.691] |
| 2106111-4 | 3 | TH Right Angle Header | 10.92 [.430] | 7.42 [.292] | 21.04 [.828] |
| 2106111-6 | 4 | TH Right Angle Header | 10.92 [.430] | 10.92 [.430] | 24.54 [.966] |



PRODUCT DIMENSIONS cont.

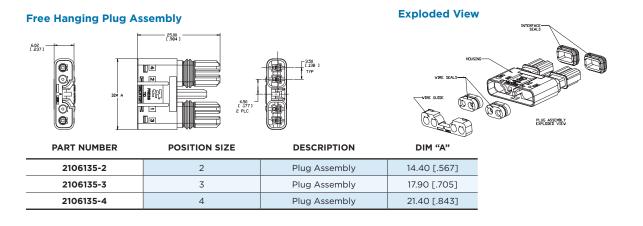


Free Hanging Receptacle Assembly





Exploded View


WIRE GUIDE



| PART NUMBER | POSITION SIZE | DESCRIPTION | DIM "A" |
|-------------|---------------|---------------------|--------------|
| 2106136-2 | 2 | Receptacle Assembly | 14.40 [.567] |
| 2106136-3 | 3 | Receptacle Assembly | 17.90 [.705] |
| 2106136-4 | 4 | Receptacle Assembly | 21.40 [.843] |

DESCRIPTION

Receptacle Contact




| PART NUMBER | | |
|-------------|-----------|--|
| 2106123-1 | 18-20 AW0 | |

| 2106123-1 18-20 AWG Receptacle Terminal | | |
|---|--|--|
| 2106123-2 18-20 AWG Receptacle Terminal (Loose Piece) | | |
| 1-2106123-1 22-24 AWG Receptacle Terminal | | |
| 1-2106123-2 22-24 AWG Receptacle Terminal (Loose Piec | | |

Cable Assemblies

| PART NUMBER | POSITION | DESCRIPTION |
|-------------|----------|------------------------------------|
| 2106378-2 | 2 | 101.60 [4.000] Plug Cable Assembly |
| 2106378-3 | 3 | 101.60 [4.000] Plug Cable Assembly |
| 2106378-4 | 4 | 101.60 [4.000] Plug Cable Assembly |

Tab Contact



| PART NUMBER | RT NUMBER DESCRIPTION | |
|----------------------------------|--|--|
| 2106124-2 18-20 AWG Tab Terminal | | |
| 2106124-9 | 2106124-9 18-20 AWG Tab Terminal (Loose Piece) | |
| 2-2106124-2 | 22-24 AWG Tab Terminal | |
| 2-2106124-7 | 22-24 AWG Tab Terminal (Loose Piece) | |

| PART NUMBER | POSITION | DESCRIPTION |
|-------------|----------|--|
| 2106391-2 | 2 | 101.60 [4.000] Receptacle Cable Assembly |
| 2106391-3 | 3 | 101.60 [4.000] Receptacle Cable Assembly |
| 2106391-4 | 4 | 101.60 [4.000] Receptacle Cable Assembly |

Questions to ask at design in

What wire gauge and insulation type will you be using?

The connectors accepts 18 -20 AWG and 22 - 24 AWG stranded wire with a wire varying maximum insulation outside diameters per wire gauge.

What special retention mechanisms are available to ensure stability on the printed circuit board?

The vertical and right angle SMT headers have surface mount hold downs whereas the vertical and right angle TH headers have board locks to provide stability during mating and un-mating.

What prevents the connectors from being disconnected unintentionally?

The connectors are snag resistant and have an integral, flush mounted, actuated latch that prevents inadvertent un-mating of the connectors.

Is your manufacturing process automated?

The SMT headers are manufactured in high temperature material for reflow processing and tape and reel packaged for high speed SMT processing.

What application tooling options are available?

Hand tools are available for product evaluation and/or low volume production using loose piece terminals. Applicators are available for mid to high volume production terminals on reel using bench top semi-automatic presses or fully automated lead makers.

What mechanical and electrical testing has the connectors been subjected to?

The TE Product Specification 108-2391 provides a summary of the test groups, sequences and results that the product was subjected to during product qualification testing.

What version of the header assemblies, vertical or right angle, are more widely accepted?

Right angle surface mount headers are more often chosen because they provide a more robust, low profile connection to the printed circuit board. Vertical headers are chosen if limited space is available to mate the plug connection in the final assembly

FOR MORE INFORMATION : te.com/lighting

TE Technical Support Center

| interner: | te.com/help |
|-------------------|-----------------------|
| USA: | +1 (800) 522-6752 |
| Canada: | +1 (905) 475-6222 |
| Mexico | +52 (0) 55-1106-0800 |
| Latin/S. America: | +54 (0) 11-4733-2200 |
| Germany: | +49 (0) 6251-133-1999 |
| UK: | +44 (0) 800-267666 |
| France: | +33 (0) 1-3420-8686 |
| Netherlands: | +31 (0) 73-6246-999 |
| China: | +86 (0) 400-820-6015 |

Part numbers in this brochure are RoHS Compliant*, unless marked otherwise. *as defined www.te.com/leadfree

te.com

© 2011 Tyco Electronics Corporation, a TE Connectivity Ltd. Company. All Rights Reserved. 4-1773455-9 CIS WR 10/2011

TE Connectivity and TE connectivity (logo) are trademarks. Other logos, product and/or company names might be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

