


Solid State Timers and Controllers

4300

Interval Timing Module



The model 4300 series provides a load circuit with operating voltage for a predetermined amount of time each time the operating voltage is applied. The operating voltage must be present for the duration that exceeds the preset interval timing period. The 4300 series is available in both AC and DC models and controls output load circuits to 1 ampere. Fixed or adjustable timing interval periods are available. Adjustable models have the interval time preset by adding a resistor across terminals 4 & 5.

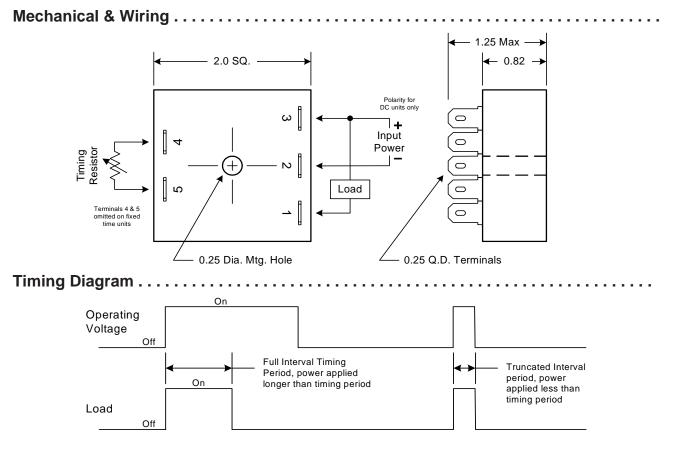

External Timing Resistor Chart

The left hand column lists five values of external resistors: 0, 1 meg, 3 meg, 5 meg, and 10 meg, and across the top are listed the five model dash numbers, 1 through 5. To illustrate how the chart works assume that timing range -3 has been selected. Under the -3 column are the times that relate to the five values of external resistors. For an external resistor equal to 0 ohms, the interval would be 2 seconds. With 1 meg ohm, 100 seconds and so forth up to 10 meg ohms where the timing interval is 1000 seconds. If a 3 meg ohm potentiometer were connected across the external timing resistor terminals, you could expect, as a minimum, a range of interval timing from 2 to 300 seconds.

External Resistor	DASH NO.					
(Ohms)	-1	-2	-3	-4	-5	
0	0.1	1	2	10	30	
1 Meg	4	30	100	500	900	
3 Meg	12	90	300	1,500	2,700	
5 Meg	20	150	500	2,500	4,500	
10 Meg	30	300	1,000	5,000	8,000	

VISIT OUR WEB SITE AT: www.artisancontrols.com

Notice: Artisan Controls Corporation assumes no responsibility for customers applications or product design. The information and data contained herein is the sole and exclusive property of Artisan Controls Corporation. Any duplication, misuse, or conversion of this information without the express written consent of Artisan Controls Corporation is illegal and will result in damages including court costs and attorney fees being assessed against the party misusing this property

Tel: 973-598-9400 • Fax: 973-598-9410 • Toll Free: 800-457-4950 Artisan Controls Corporation, 111 Canfield Ave., Bldg B15-18, Randolph, NJ, 07869, USA



Solid State Timers and Controllers

Specifications		
Operating Voltage:	12V DC, 24V DC, 48V DC, 12V AC 24V AC, 48V AC, 115V AC, 230V AC.	
Voltage Tolerance:	±20%, AC 50/60Hz.	
Operating Current:	All voltages < 20 mA plus load current requirements.	
Timing Mode:		
Fixed Timing:	From 0.1 seconds to 10,000 seconds.	
Fixed Timing Purchase Tolerance		
	0.1 seconds to 8,000 seconds covered by 5 models.	
	Minimum time - 15% +0%, maximum time - 0% +15%.	
	±15% of set point over specified temperature and voltage range.	
Repeatability Of Timing Period:		
Recycle Time:	Operating voltage must be removed for a minimum of 200 milliseconds to	
	guarantee all timing and output circuits have reset.	
	Rated for 10mA to 1A inductive with inrush current to 25 A for 8 mS.	
	2V for DC models, 4V maximum for AC models.	
	1 mA maximum for DC models, 3 mA maximum for AC models.	
Transient Protection:	Protected by silicon transient suppressors which respond to transients within 1	
	x 10-12 seconds to a peak pulse power dissipation of 1500 watts.	
	1500V rms all terminals to case.	
Operating Temperature:		
	95% non-condensing.	
	Encapsulated module with .25 quick connect wiring terminals.	
Agency Recognitions:	UL File E47858: Appliance Controls - Component ATNZ2 (US) & ANTZ8 (Can),	
	Auxiliary Devices - Component NKCR2 (US) & NKCR8 (Can).	
Data Sheet Revision Date:	January 13, 2006	

Ordering Information Fixed Timing Models

Part Number 🛛 🗕	Operating Voltage	Fixed Timing In Seconds	 Fixed Timing Tolerance
4300F -	-1 (5V DC) -2 (12V DC) -3 (24V DC) -4 (48V DC) -5 (12V AC) -6 (24V AC) -7 (48V AC) -8 (115V AC) -9 (230V AC)	Specify the fixed timing period in seconds from 0.1 to 10,000	-A 2% -B 5% -C 10 % -D 20 % Specify the dash number that represents the timing tolerance required only on fixed timing units

Example: 4300F-8-900-C operates from 115V AC with fixed timing of 900 seconds ± 10%.

Part Number	Operating Voltage	 Timing In Seconds
4300A -	-1 (5V DC) -2 (12V DC) -3 (24V DC) -4 (48V DC) -5 (12V AC) -6 (24V AC) -7 (48V AC) -8 (120V AC) -9 (230V AC)	-1 (0.1 - 30) -2 (1 - 300) -3 (2 - 1000) -4 (10 - 4500) -5 (30 - 8000) Timing remotely adjustable by resistor across timing terminals

Example: 4300A-2-5 operates from 12V DC with adjustable timing from 30 to 8000 seconds.

VISIT OUR WEB SITE AT: www.artisancontrols.com

Notice: Artisan Controls Corporation assumes no responsibility for customers applications or product design. The information and data contained herein is the sole and exclusive property of Artisan Controls Corporation. Any duplication, misuse, or conversion of this information without the express written consent of Artisan Controls Corporation is illegal and will result in damages including court costs and attorney fees being assessed against the party misusing this property

Tel: 973-598-9400 • Fax: 973-598-9410 • Toll Free: 800-457-4950 Artisan Controls Corporation, 111 Canfield Ave., Bldg B15-18, Randolph, NJ, 07869, USA