



Description:

A Silicon NPN transistor in a TO-39 case intended for high speed switching applications.



Absolute Maximum Ratings:

Collector-Emitter Voltage, V_{CE0}	: 40V
Collector-Base Voltage, V_{CBO}	: 75V
Emitter-Base Voltage, V_{EBO}	: 6V
Continuous Collector Current, I_C	: 800mA
Total Device Dissipation ($T_A = +25^\circ\text{C}$), P_D	: 400mW
Derate above 25°C	: 2.28mW/ $^\circ\text{C}$
Total Device Dissipation ($T_C = +25^\circ\text{C}$), P_D	: 1.2W
Derate above 25°C	: 6.85mW/ $^\circ\text{C}$
Operating Junction Temperature Range, T_J	: -65°C to $+200^\circ\text{C}$
Storage Temperature Range, T_{stg}	: -65°C to 200°C

Electrical Characteristics: ($T_A = +25^\circ\text{C}$ Unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Max	Unit
OFF Characteristics					
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 10\text{mA}, I_B = 0$	40	-	V
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C = 10\mu\text{A}, I_E = 0$	75	-	V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E = 10\mu\text{A}, I_C = 0$	6	-	V
Collector Cut-Off Current	I_{CBO}	$V_{CE} = 60\text{V}, I_E = 0$	-	0.01	μA
		$V_{CE} = 60\text{V}, I_E = 0, T_A = +150^\circ\text{C}$	-	10	μA
	I_{CEX}	$V_{CE} = 60\text{V}, V_{EB(off)} = 3\text{V}$	-	10	μA
Emitter Cut-Off Current	I_{EBO}	$V_{EB} = 3\text{V}, I_C = 0$	-	10	μA
Base Cut-Off Current	I_{BL}	$V_{CE} = 60\text{V}, V_{EB(off)} = 3\text{V}$	-	20	μA

On Characteristics

DC Current Gain	h_{FE}	$I_C = 0.1\text{mA}, V_{CE} = 10\text{V}$	20	-	-
		$I_C = 1\text{mA}, V_{CE} = 10\text{V}$	50	-	-
		$I_C = 10\text{mA}, V_{CE} = 10\text{V}$	75	-	-
		$I_C = 10\text{mA}, V_{CE} = 10\text{V}, T_A = -55^\circ\text{C}$	35	-	-
		$I_C = 150\text{mA}, V_{CE} = 10\text{V}$	100	300	-
		$I_C = 150\text{mA}, V_{CE} = 1\text{V}$	50	-	-
		$I_C = 500\text{mA}, V_{CE} = 10\text{V}$	40	-	-
Collector-Emitter Saturation Voltage (Note 1)	$V_{CE(sat)}$	$I_C = 150\text{mA}, I_B = 5\text{mA}$	-	0.3	V
		$I_C = 500\text{mA}, I_B = 50\text{mA}$	-	1	V
Base-Emitter Saturation Voltage (Note 1)	$V_{BE(sat)}$	$I_C = 150\text{mA}, I_B = 15\text{mA}$	0.6	1.2	V
		$I_C = 500\text{mA}, I_B = 50\text{mA}$	-	2	V

Small-Signal Characteristics

Current Gain-Bandwidth Product (Note 2)	f_T	$I_C = 20\text{mA}, V_{CE} = 20\text{V}, f = 100\text{MHz}, (\text{Note } 2)$	300	-	MHz
Output Capacitance	C_{obo}	$V_{CB} = 10\text{V}, I_E = 0, f = 100\text{kHz}$	-	8	pF
Input Capacitance	C_{ibo}	$V_{EB} = 0.5\text{V}, I_C = 0, f = 100\text{kHz}$	-	25	pF
Input Impedance	h_{ie}	$I_C = 1\text{mA}, V_{CE} = 10\text{V}, f = 1\text{kHz}$	2	8	k Ω
		$I_C = 10\text{mA}, V_{CE} = 10\text{V}, f = 1\text{kHz}$	0.25	1.25	k Ω
Voltage Feedback Ratio	H_{re}	$I_C = 1\text{mA}, V_{CE} = 10\text{V}, f = 1\text{kHz}$	-	8	$\times 10^{-4}$
		$I_C = 10\text{mA}, V_{CE} = 10\text{V}, f = 1\text{kHz}$	-	4	$\times 10^{-4}$
Output Admittance	h_{oe}	$I_C = 1\text{mA}, V_{CE} = 10\text{V}, f = 1\text{kHz}$	5	35	μhos
		$I_C = 10\text{mA}, V_{CE} = 10\text{V}, f = 1\text{kHz}$	25	200	μhos
Collector-Base Time Constant	$r_b'C_C$	$I_C = 20\text{mA}, V_{CB} = 20\text{V}, f = 31.8\text{mHz}$	5	150	ps
Noise Figure	NF	$I_C = 100\mu\text{A}, V_{CE} = 10\text{V}, R_s = 1\text{k}\Omega, f = 1\text{MHz}$	-	4	dB
Real Part of Common-Emitter High Frequency input Impedance	$\text{Re}(h_{ie})$	$I_C = 20\text{mA}, V_{CE} = 20\text{V}, f = 300\text{MHz}$	-	60	Ω


Switching Characteristics

Delay Time	t_q	$V_{CC} = 30\text{V}, I_C = 150\text{mA}, V_{BE(\text{OFF})} = 0.5\text{V}, I_{B1} = 15\text{mA}$	-	10	ns
Rise Time	t_r		-	25	ns
Storage Time	t_s	$V_{CC} = 30\text{V}, I_C = 150\text{mA}, I_{B1} = I_{B2} = 15\text{mA}$	-	225	ns
Fall Time	t_f		-	60	ns
Active Region Time Constant	T_A	$I_C = 150\text{mA}, V_{CE} = 30\text{V}$	-	2.5	ns

Notes

1. Pulse Test: Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$.
2. f_T is defined as the frequency at which $|h_{re}|$ extrapolates to unity.

NPN

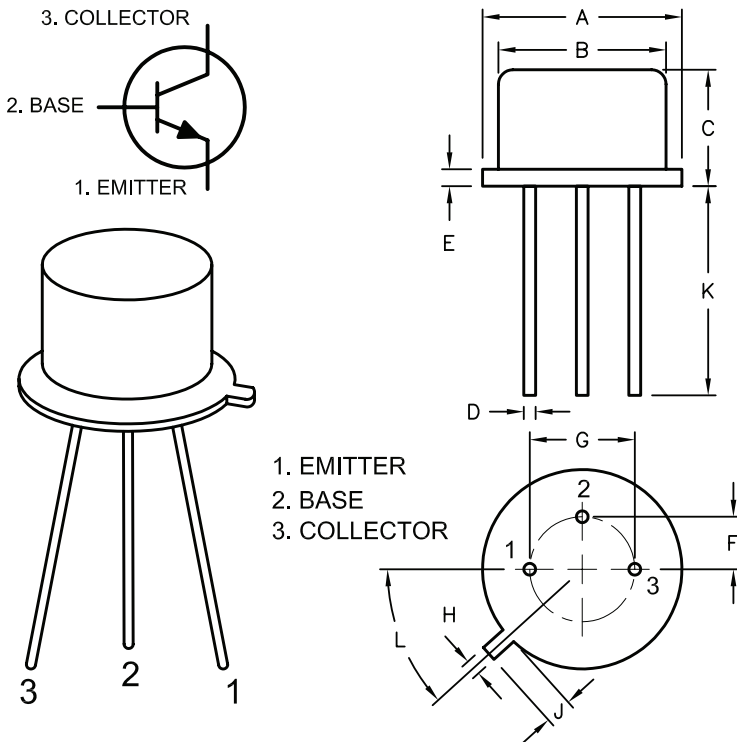

Dimensions	A	B	C	D	E	F	G	H	J	K	L
Min.	8.5	7.74	6.09	0.4	-	2.41	4.82	0.71	0.73	12.7	42°
Max.	9.39	8.5	6.6	0.53	0.88	2.66	5.33	0.86	1.02	-	48°

Dimensions : Millimetres

Part Number Table

Description	Part Number
Bipolar, TO-39, NPN, Silicon, High Speed Switching	2N2219A

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.