HDMI Adapter Female / Female





Specifications:


Connector Type : Audio, Video
Convert From Gender : Receptacle
Convert From Positions : 19
Connector Colour : Black
Connector Body Material : Plastic
Connector Type A : HDMI Socket
Connector Type B : HDMI Socket

Electrical Characteristics:

Current Rating : 1A DC

Withstanding Voltage : 300V DC,10ms

 $\begin{array}{ll} \mbox{Insulation Resistance} & : 10 \mbox{m}\Omega \\ \mbox{Conductive Resistance} & : 2\Omega \end{array}$

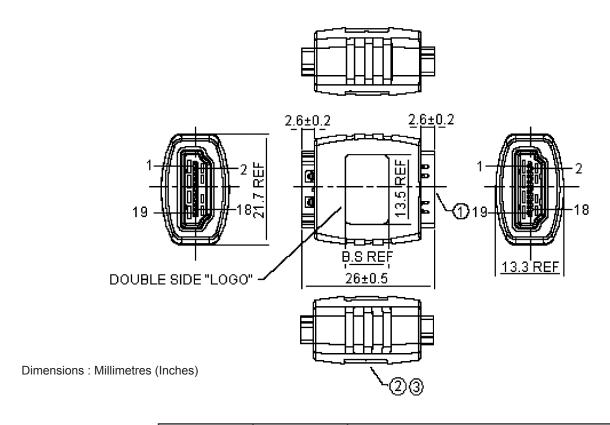

Item Number	Part Name	Description	
1	HDMI Conn	HDMI 19P Female 30µ / AU Black Shell G / F Solder Type	
2	PE	PE Low Density	
3	PVC	PVC: 45Pα , Black	



HDMI Adapter Female / Female



Pin Assignment:

HDMI			Data 2-)	
1 · 2 · 6 ·	 6	(TMDS (TMDS	Data 2+) Data 2 Shi Data 1-)	ield)
4 · 5 · 9 ·	5 9	(TMDS (TMDS	Data 1+) Data 1 Shi Data 0-)	ield)
7 1 8 1 12	 8	(TMDS	Data 0+) Data 0 Shi Clock -)	ield)
10°		•	Clock +) Clock Shie	eld)

HDMI	19F	HDMI	19F	
18		 18 (+5V Pow	er)
17		———17 (Ground)	·
15		15 (DDC Clo	ck)
16			DDC Dat	
19			Hot Plug	Detect)
13			CEC)	
14:		 14 (NC)	
SHELL		—— SH	ELL	

Specification Table

Description	Part Number	
Adaptor, HDMI Female-HDMI Female	1901119	

Important Notice: This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.



