


Double Row Terminal Blocks

Kulka® 600A GP Series

300 Volts

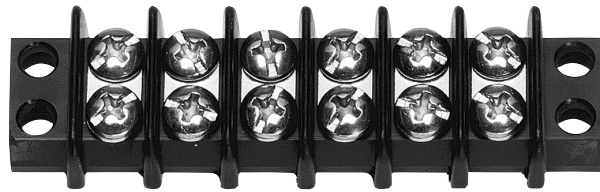

Specifications:

- Base, Phenolic, 150° C
- JJ (GDI-30F) Material Available
- Open Back Design (Insulator Strip Required for Voltage Rating)
- Screws, #6-32 Binder Head, Phil-Slot
- Terminals, Plated Brass
- 1-22 Poles
- The Suitability Of These Devices For Greater Currents Shall Be Determined In The End-Use Application
- 3/8" Centers
- Wire Range With Wire Binding Screw #12-#22 AWG – 15 Amps
- UL Recognized File No. E47811
- CSA Certified File No. LR19766
- CE

Catalog #	# of poles	Dimensions	
		A	B
600A GP 01	1	1.03	0.75
600A GP 02	2	1.41	1.13
600A GP 03	3	1.78	1.50
600A GP 04	4	2.16	1.88
600A GP 05	5	2.53	2.25
600A GP 06	6	2.91	2.63
600A GP 07	7	3.28	3.00
600A GP 08	8	3.66	3.38
600A GP 09	9	4.03	3.75
600A GP 10	10	4.41	4.13
600A GP 11	11	4.78	4.50

Catalog #	# of poles	Dimensions	
		A	B
600A GP 12	12	5.16	4.88
600A GP 13	13	5.53	5.25
600A GP 14	14	5.91	5.63
600A GP 15	15	6.28	6.00
600A GP 16	16	6.66	6.38
600A GP 17	17	7.03	6.75
600A GP 18	18	7.41	7.13
600A GP 19	19	7.78	7.50
600A GP 20	20	8.16	7.88
600A GP 21	21	8.53	8.25
600A GP 22	22	8.91	8.63

Top Mounted Hardware is .187" Wide
MM = Dim X 25.4

Hardware Options:

- | | | | |
|-----------|---|-------------------------------|-------------|
| KT 19 | = | Full Quick Connect (0° flat) | See Page 88 |
| KT 20 | = | Full Quick Connect (45° Bend) | See Page 88 |
| KT 21 | = | Full Quick Connect (90° Bend) | See Page 88 |
| ST | = | Full Solder | See Page 89 |
| LL(J 600) | = | Line to Line Jumper | See Page 91 |
| 600 RJ(s) | = | Multiple Position Jumper | See Page 91 |
| 3/4 ST | = | Half Solder | See Page 89 |
| KT 25 | = | Half Quick Connect (0° Flat) | See Page 88 |
| KT 26 | = | Half Quick Connect (45° Bend) | See Page 88 |
| KT 27 | = | Half Quick Connect (90° Bend) | See Page 88 |
| 3865 | = | Wire Clamp Screw | See Page 91 |
| Y | = | Feed Thru Solder (.312) | |
| YSY | = | Feed Thru Solder (.500) | |
| Z | = | Lug Over the Side (.625) | |

