## Inductor







## **Specifications:**

Inductance : 22µH Inductance Tolerance : ± 20% : 0.06Ω DC Resistance Max DC Current Rating : 2.8A Self Resonant Frequency : 13MHz Inductor Case Style : SMD No. of Pins : 2 Lead Spacing : 2.6mm Core Material : Ferrite External Depth : 7.8mm : 5.3mm External Length / Height : 8mm External Width Resonant Frequency : 1kHz

Series : MCSDC0805

## **Electrical Characteristics (at 25°C)**

1kHz 1V	L	22μH ±20%
at 25°C	DCR	110mΩ (Max.)
1kHz 1V Isat = 2.3A	L at Isat	L drops 35% (Maximum)
1kHz 1V Irms = 1.5A	ΔΤ	Temperature Rise 40°C (Max.)

Operating temperature: -55°C to +130°C

### **Material List**


No.	Item	Material Description
1	Core	R5A CDR7.5 × 5 (ST) B3.4 F2.5
2	Wire	Ø0.3mm × 1P 2UEWF (155°C)
3	Solder (Lead Free)	Sn99.3%/Cu0.7%



# Inductor




## **Schematic Diagram**




#### Note:

- 1. Wire Ø0.3mm × 1P 2UEWF155°C
- 2. 24.5TS (Reference)

### **Electric Characteristics**

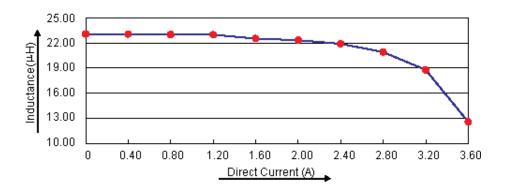

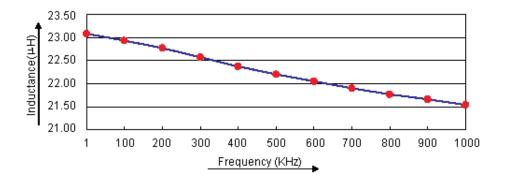




# Inductor



## **Configurations and Dimensions**



Dimensions: Millimetres

Α	7.8mm	(Maximum)
В	5.3mm	(Maximum)
С	2.6mm	(Reference)

#### **Part Number Table**

Description	Part Number
Inductor, 22µH, 20%, SMD	MCSDC0805-220MU

Important Notice: This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com www.farnell.com www.newark.com

