Inductor







Specifications:

Inductance : 22µH Inductance Tolerance : ± 20% DC Resistance Max : 0.1Ω DC Current Rating : 1.95A : 13MHz Self Resonant Frequency Inductor Case Style : SMD No. of Pins : 2 Lead Spacing : 2.8mm Core Material : Ferrite External Depth : 9.8mm External Length / Height : 5.8mm External Width : 9.8mm Resonant Frequency : 1kHz

Series : MCSDC1006

Electrical Characteristics (at 25°C)

1kHz 1V	L	22μH ±20%
at 25°C	DCR	100mΩ (Max.)
1kHz 1V Irms = 1.95A	ΔΤ	Temperature Rise 40°C (Max.)

Operating temperature: -55°C to +130°C

Material List


No.	Item	Material Description
1	Core	K22 DRM 9.5 × 5.5 RB-R B = 4.5 F = 3
2	Wire	Ø0.4mm × 1P 2UEF1/U 155°C
3	Solder (Lead Free)	Sn99.3%/Cu0.7%



Inductor




Schematic Diagram




Note:

- 1. Wire Ø0.4mm × 1P 2UEF1/U 155°C
- 2. 21.5TS (Reference)

Electric Characteristics

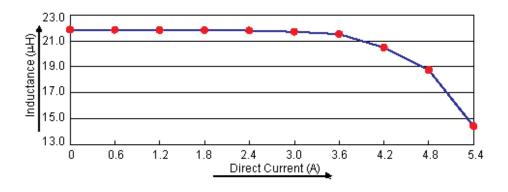


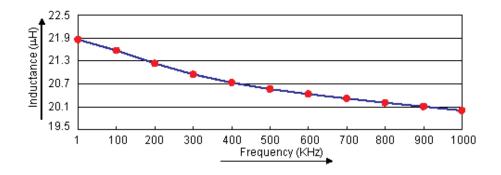

Inductor



Configurations and Dimensions



 A
 9.8 mm
 (Maximum)

 B
 5.8 mm
 (Maximum)

 C
 2.9mm
 (Reference)

Dimensions: Millimetres

Part Number Table

Description	Part Number
Inductor, 22µH, 20%, SMD	MCSDC1006-220MU

Important Notice: This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com www.farnell.com www.newark.com

