Microswitch SPDT, Long Lever

multicomp



Specifications:

Rating

Maximum Contact Resistance Insulation Resistance Withstand Voltage Operating Frequency

Ambient Temperature Ambient Humidity Mechanical Life Electrical Life (at rate load) **Contact Configuration** Microswitch Type Actuator Style Switch Operation **Operating Force Max** Switch Terminals External Depth External Width Height **Operating Force** Pre-travel Series Switch Case


: 10A, 125/250V AC : 10(2)A, 125/250V AC (NEMKO/ENEC/CQC) : 25T130 µ50E3 : 500MΩ : >100MΩ 500V DC : 1,000V AC for 1 minute : Mechanical 60 operations/minute : Electrical 6 to 12 operation/minute : -25°C to +85°C : ≤ 85%RH : 1,000,000 cycles : 50,000 cycles : SPDT : Snap Action : Long Lever : Off-On : 60gf : Quick Connect, Solder : 9.7mm : 27.8mm : 15.8mm : 0.59N : 7.6mm : M141T01 : PBT (Polybutylene Terephthalate)

www.element14.com www.farnell.com www.newark.com



Microswitch SPDT, Long Lever



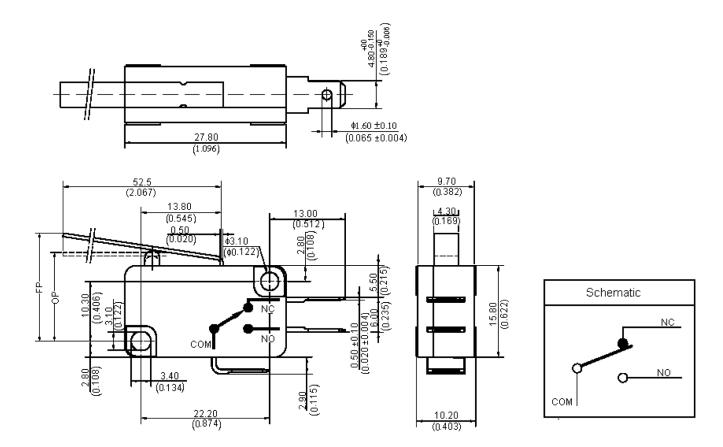

Note: Tolerances unless otherwise specified: ±0.016/0.4 inches/mm

Dimensions: Millimetres

Part Number Table

Description	Operating force (gf)				OP	Max. FP	Dort number
	Α	В	С	D	(mm)	(mm)	Part number
Microswitch, SPDT, 10A, Long Lever	20	35	40	75	15.3 ±2.5	22	M141T02-AD0302D

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com www.farnell.com www.newark.com

